

# Welding Reels





# 5 reasons why hose reels increase productivity



**Improve efficiency**  
Hoses, cable and cords are where you want/need them.



**Increase safety**  
Reduce tripping accidents and lost work time.



**Minimize leakages**  
Reduce costs of air and water leakages.



**Reduce hose wear**  
Hose and cords on reels can last up to five times longer.



**Increase productivity**  
No more tangled hoses improves efficiency.

# Reelcraft: Better by Design

## Vulcanized Double Line Hoses

Grade RM: Non-oil resisting rubber tube with a flame and oil resisting rubber cover (acetylene only)  
Grade T: Flame and oil resistant tube and cover for use with all fuel gases.

## Reinforced Steel

The steel-stamped guide arm is reinforced to reduce bending due to angular pull.

## Corrosion-Resistant


Steel components are individually powder coated to virtually eliminate corrosion.

## Trouble-Free Performance

Fewer components increase the service life of the reel and improve performance.

## Finish with Quality

Our components undergo a special five-stage cleaning process and are individually powder-coated for the highest quality paint adhesion. Excess powder is reclaimed to be environmentally friendly.

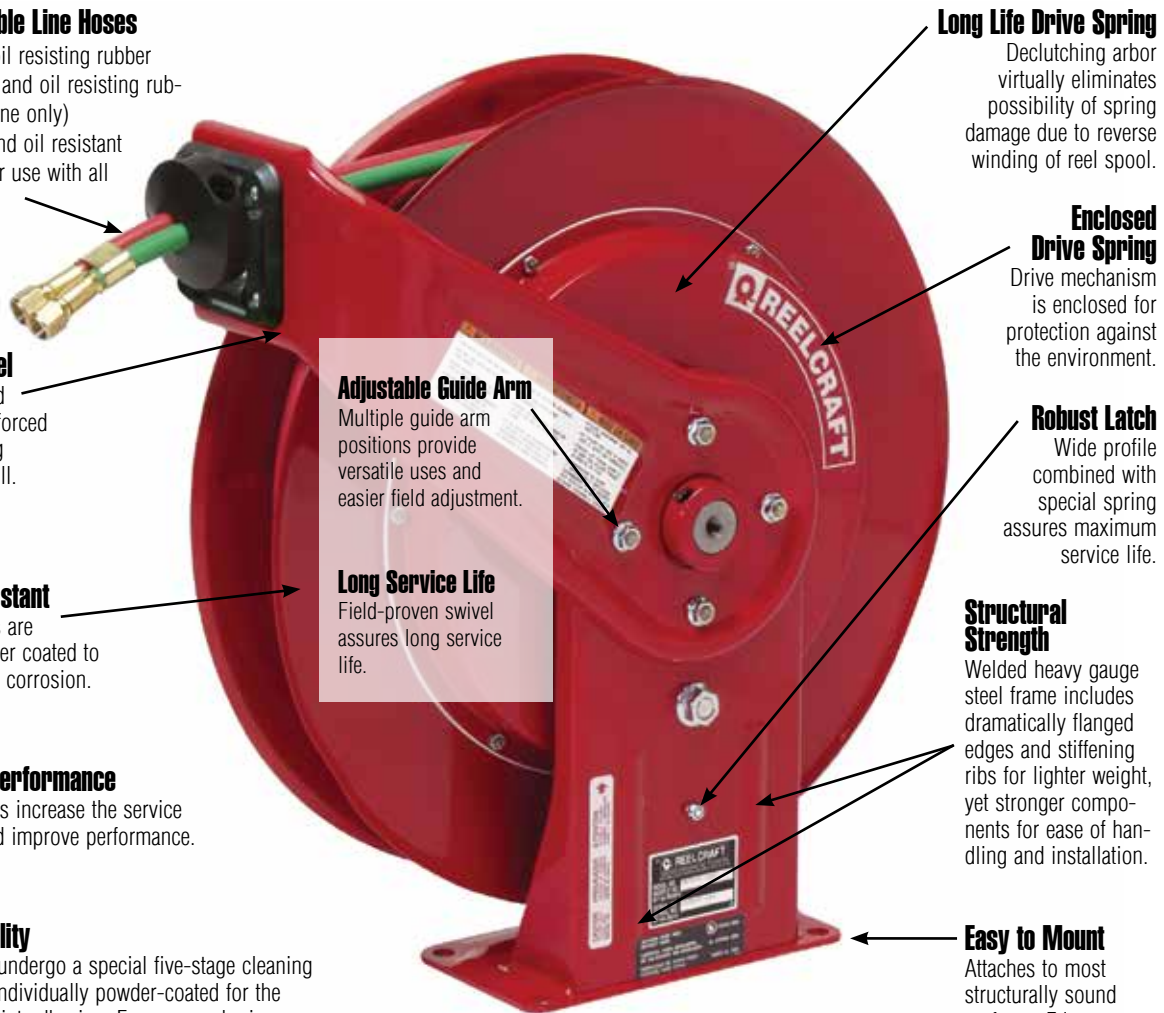

## Long Life Drive Spring

Declutching arbor virtually eliminates possibility of spring damage due to reverse winding of reel spool.

## Enclosed Drive Spring

Drive mechanism is enclosed for protection against the environment.

## Robust Latch

Wide profile combined with special spring assures maximum service life.

## Structural Strength

Welded heavy gauge steel frame includes dramatically flanged edges and stiffening ribs for lighter weight, yet stronger components for ease of handling and installation.

## Easy to Mount

Attaches to most structurally sound surfaces. Edges are curved for safety.

## Adjustable Guide Arm

Multiple guide arm positions provide versatile uses and easier field adjustment.

## Long Service Life

Field-proven swivel assures long service life.

Shown: TW7450 OLP

# Complete Welding Series | Series TW / STW / BA



STW3450 OLP

Series S reels are made in Australia.



TW7450 OLP

Made in USA



BA36106 L

Diagram	Series 5000 / 7000 / 80000					
	1		2		3	
	in	mm	in	mm	in	mm
A	14 1/2	368	20 1/4	514	25 3/8	645
B	13 3/4	349	19 3/4	502	24	610
C	9 3/4	248	7 7/8	200	10	254
D	2 1/2	64	3 7/8	98	6	152
E	6	152	7 3/8	187	12 1/4	311

Series 5000 reels have four 5/16" (8 mm) diameter mounting holes.

Diagram	Series 30000			
	4		5	
	in	mm	in	mm
A	15 5/8	397	21 5/8	550
B	6	152	12	305
C	9 3/4	248	15 3/4	400
D	11	280	17	432

Four 1/2" (12.7 mm) mounting holes. Overall length with crank handle removed is 17 3/4" (451 mm).

Model with Hose	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Pressure	Hose Outlet	Reel Inlet	Model without hose & bumper	Shipping Weight		Size Index #	
	lbs	kg	in	mm	in	mm	ft	m					psi	bar		in
<b>Oxygen / Acetylene (only) Hose Reels</b>																
TW5425 OLP	26	12	1/4	6	.530	13	25	8	200	14	9/16 - 18(F)	1/4 NPT(F)	TW5400 OLP	21	10	1
STW3450 OLP	29	13	1/4	6	.530	13	50	15	300	21	9/16 - 18(F)	9/16 - 18(M)	-----	-----	-----	**
TW7450 OLP	50	23	1/4	6	.530	13	50	15	200	14	9/16 - 18(F)	1/4 NPT(F)	TW7400 OLP	42	19	2
TW7460 OLP	55	25	1/4	6	.530	13	60	18	200	14	9/16 - 18(F)	1/4 NPT(F)	TW7400 OLP	42	19	2
Series 30000 Hand Crank			1/4	6	.530	13	125	38	200	14	9/16 - 18(M)	1/4 NPT(F)	BA36106 L	50	23	4
Series 30000 Hand Crank			1/4	6	.530	13	250	76	200	14	9/16 - 18(M)	1/4 NPT(F)	BA36112 L	57	26	5
<b>Welding Gas - Oxygen / Acetylene, Mapp, Propane, Natural and Fuel Gas (T-Grade) Hose Reels</b>																
TW5425 OLPT	26	12	1/4	6	.530	13	25	8	200	14	9/16 - 18(F)	1/4 NPT(F)	TW5400 OLPT	22	10	1
TW7450 OLPT	50	23	1/4	6	.530	13	50	15	200	14	9/16 - 18(F)	1/4 NPT(F)	TW7400 OLPT	43	20	2
TW7460 OLPT	55	25	1/4	6	.530	13	60	18	200	14	9/16 - 18(F)	1/4 NPT(F)	TW7400 OLPT	43	20	2
TW84100 OLPT	101	46	1/4	6	.530	13	100	30	200	14	9/16 - 18(F)	9/16 - 18(M)	TW84000 OLPT	81	37	3
TW86075 OLPT	99	45	3/8	10	.625	16	75	23	200	14	9/16 - 18(F)	9/16 - 18(M)	TW86000 OLPT	86	39	3

Acetylene and fuel gas (red) inlet 1/4" FPT / oxygen (green) inlet 1/4" FPT. 9/16-18 models above are B size. Acetylene/fuel gas side has a LH thread and the oxygen side has a RH thread. Models supplied less hose have male outlets. Maximum temperature 150 °F (65 °C). \*\*Refer to reelcraft.com.

## Inlet Hose Assemblies

Part Number	Hose I.D.		Length		End Fittings	Pressure	Weight	
	in	mm	ft	m			psi	bar
<b>Twin Welding Oxygen/acetylene only (RM grade)</b>								
S600100-2	1/4 dual	6	2	.61	9/16-18 LH/RH(M/F)	200	14	.70 .32
S600100-4	1/4 dual	6	4	1.22	9/16-18 LH/RH(M/F)	200	14	1.12 .51
S600100-6	1/4 dual	6	6	1.83	9/16-18 LH/RH(M/F)	200	14	1.90 .86
<b>Twin Welding Mapp, propane, natural and fuel gas (T-grade)</b>								
S601031-2	1/4 dual	6	2	.61	9/16-18 LH/RH(F)	200	14	.70 .32
S601031-4	1/4 dual	6	4	1.22	9/16-18 LH/RH(F)	200	14	1.12 .51
S601031-6	1/4 dual	6	6	1.83	9/16-18 LH/RH(F)	200	14	1.90 .86

Hose Inlet Connecting Fittings - Optional	
Model No.	Inlet Connection Fittings
90°	S300090 ACETYLENE B size 9/16 - 18 LH (M) x 1/4" NPT (M)
	S300091 OXYGEN B size 9/16 - 18 RH (M) x 1/4" NPT (M)
Straight	261371 OXYGEN B size 9/16 - 18 RH (M) x 3/8" NPT (M)
	261372 ACETYLENE/fuel gas - B size 9/16 - 18 LH(M) x 3/8" NPT(M)

Hose supplied on oxygen/acetylene reels is twin-Siemense type meeting R.M.A. and C.G.A. type V.D., grade RM specifications.

## Hose Assemblies

Part Number	I.D. & O.D.		Length	Pressure	NPTF(M) End Fittings	Weight			
	in	mm				ft	m	psi	bar
<b>Twin Welding Oxygen/acetylene only (RM grade) - LH/RH(F)</b>									
601032-25	1/4	6	25	8	200	14	9/16-18	6.5	3.0
601032-50	1/4	6	50	15	200	14	9/16-18	12.1	5.5
601032-60	1/4	6	60	18	200	14	9/16-18	13.3	6.0
601032-100	1/4	6	100	30	200	14	9/16-18	24.2	11.0
<b>Twin Welding Mapp, propane, natural and fuel gas (T-grade) - LH/RH(F)</b>									
601031-25	1/4	6	25	8	200	14	9/16-18	6.5	3.0
601031-50	1/4	6	50	15	200	14	9/16-18	12.1	5.5
601031-60	1/4	6	60	18	200	14	9/16-18	14.4	6.50
601031-100	1/4	6	100	30	200	14	9/16-18	24.2	11.0

**Caution:** Be sure working pressure required does not exceed above ratings. Misapplication can result in serious operator injury. **Note:** Advise product to be handled, maximum temperature and pressure fitting size or sizes when ordering.

**NOTE:** Reels without hose, Series TW5400 OLP(T), TW7400 OLP(T), TW84000 OLPT and TW86000 OLPT are U/L listed #70H2.

Models listed with an icon can ship same day upon request when the order is received by 1:00 PM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse 
 Indiana & California Warehouses 
 California Warehouse 
 Canadian Warehouse

Customer Service: 1.855.634.9109  
All Other Calls: 1.800.444.3134



## Hand Crank / Spring Retractable Cable Welding Reels Series CEA / WC



CEA30006



WC80001



WC7000



- Designed to improve safety in the work area with an increase in efficiency and productivity
- Cable reels have a current path through a continuous 400 or 700 AMP, 90 V DC (maximum) rated enclosed slip ring

- Welding cable reels store work lead or electrode lead, up to #4/0, safely and effectively when not in use. Each lead requires a separate reel. When welding also refer to ANSI/Asc Z 49.1
- Stores cable when not in use, eliminating tangled, kinked welding cables
- Maintains proper bend radius of cables, providing longer cable life
- Keeps work area and vehicles better organized, resulting in better space utilization

**Caution:** If cable reels are to be used for extended periods of time, unwind all cable from reel to prevent heat build-up. For indoor non weather-tight applications only.

### Features - Hand Crank Reels

- ✓ All-bolted heavy gauge steel construction provides long life and ease of use and maintenance.
- ✓ Manual drum lock prevents spool from turning when not in use preventing unwanted pay out of cable.

Size Index	Size Index					
	1		2		3	
	in	mm	in	mm	in	mm
<b>A</b>	20 <sup>1</sup> / <sub>4</sub>	514	20 <sup>1</sup> / <sub>4</sub>	514	25 <sup>3</sup> / <sub>8</sub>	645
<b>B</b>	19 <sup>3</sup> / <sub>4</sub>	502	19 <sup>3</sup> / <sub>4</sub>	502	24	610
<b>C</b>	7 <sup>7</sup> / <sub>8</sub>	200	7 <sup>7</sup> / <sub>8</sub>	200	10	254
<b>D</b>	3 <sup>7</sup> / <sub>8</sub>	98	3 <sup>7</sup> / <sub>8</sub>	98	6	152
<b>E</b>	13 <sup>1</sup> / <sub>4</sub>	337	14	356	15 <sup>5</sup> / <sub>8</sub>	397

Size Index	Size Index			
	4		5	
	in	mm	in	mm
<b>A</b>	6	152	12	305
<b>B</b>	9 <sup>3</sup> / <sub>4</sub>	248	15 <sup>3</sup> / <sub>4</sub>	400
<b>C</b>	11	279	17	432
<b>D</b>	15	381	21	533
<b>E</b>	21	533	27	686

Four 1/2" (12.7 mm) diameter mounting holes.



### Interactive Reel Catalog

Visit [www.reelcraft.com/catalog](http://www.reelcraft.com/catalog) for complete product specifications, available parts and accessories.

#### Prop 65: ⚠ WARNING:

Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Cable Size	Bumper
#2, #1	1-HR1004-A
#1/0, #2/0, #3/0	1-HR1004
#4/0	2-HR1004-3

Model without cable & bumper	Cable Size						Amps	Shipping Weight	Size Index #						
	#2 (34mm <sup>2</sup> )		#1 (42mm <sup>2</sup> )		#1/0 (54mm <sup>2</sup> )					#2/0 (67mm <sup>2</sup> )		#3/0 (85mm <sup>2</sup> )		#4/0 (107mm <sup>2</sup> )	
	ft	m	ft	m	ft	m				ft	m	ft	m	ft	m
CEA30006	300	91	250	76	200	61	150	46	-----	-----	400	46	21	4	
CEA30012	500*	152	500*	152	400	122	300	91	-----	-----	400	54	24	5	
WC7000	-----	-----	50	15	50	15	50	15	-----	-----	400	58	26	1	
WCH7000	-----	-----	-----	-----	-----	-----	-----	-----	50	15	50	15	26	2	
WC80001	-----	-----	75	23	75	23	75	23	-----	-----	400	102	46	3	
WC80002	-----	-----	100	30	-----	-----	-----	-----	-----	-----	400	104	47	3	
WCH80001	-----	-----	-----	-----	-----	-----	-----	-----	75	23	75	23	46	3	

\*May exceed maximum cable length allowable for most welding applications. **NOTE:** Each cable requires separate reel. Reference [reelcraft.com](http://reelcraft.com) for guide arm positions.

Models listed with an icon can ship same day upon request when the order is received by 1:00 PM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse 
 Indiana & California Warehouses 
 California Warehouse 
 Canadian Warehouse



# Multiple Configurations | Safe-T-Reel Series

## Hand Crank Reels

Up to 150' fuel gas  
Up to 200' 12/3 cable



Ideal for applications where space, weight and flexibility are key, these reels are designed for manual winding of air/water/fuel gases hose, electric cord and welding cable. Versatile in function, select configurations to suit specific needs. Safe-T-Reels offer trouble-free management of large capacities of hose or cord.



Side-by-side combinations  
T-2462-0




Stacked combinations  
T-2464-0

Model without cable	AMP	Reel Capacity		Cable		Shipping Weight		Size Index #
		ft	m	AWG	Cond	lbs	kg	
<b>Single Power Cable - 3 Conductor</b>								
T-1535-003	30	150	45	8	3	18.5	5	1
T-1535-083-100*	33	100	30	8	3	50	23	1
T-1535-103-200*	24	200	61	10	3	81	37	1
T-1535-123-100*	25	100	30	12	3	46	21	1
T-1535-123-200*	20	200	61	12	3	71	32	1

\*Includes cable.

		Dimensions - Size Index					
		1		2		3	
		in	mm	in	mm	in	mm
<b>A</b>	19	483	19	483	19	483	
<b>B</b>	18	457	18	457	18	457	
<b>C</b>	6	152	6	152	6	152	
<b>D</b>	6 1/2	165	6 1/2	165	12 1/2	165	
<b>E</b>	15 3/4	401	16 1/4	412	21 3/4	552	

Four 1/2" (12.7 mm) diameter mounting holes.

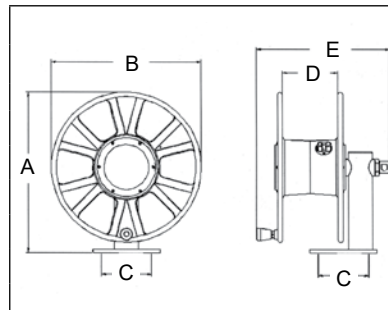

Model without hose	Hose I.D.		Hose O.D.		Reel Capacity		Pressure		Shipping Weight		Size Index #
	in	mm	in	mm	ft	m	psi	bar	lbs	kg	
<b>Single Spool Air/Water Hose Reels</b> Maximum temperature 150 °F (65 °C)											
T-1115-08	1/2	13	.844	21	150	46	300	21	18	8	1
T-1116-08	1/2	13	.844	21	250	76	300	21	22	10	3
T-1117-12	3/4	19	1.188	30	50	15	250	17	18	8	1
T-1118-12	3/4	19	1.188	30	75	23	250	17	22	10	3
<b>Single Spool Oxygen/Acetylene T-Grade Seals</b> Maximum temperature 150 °F (65 °C)											
T-1225-04	1/4	6	.530	13	150	45	200	14	19	9	2
T-1225-04-100T*	1/4	6	.530	13	100	30	200	14	44	20	2
T-1226-06	3/8	10	.625	16	100	30	200	14	19	9	2


\*Includes hose.

### Detail of heavy duty shaft

with tapered roller bearing for high rigidity



Shaft sizes are 1" to 1.25" in diameter, supported by tapered roller bearings with 2" to 2.3" housings.





T-1225-04-100T

Model without cable	AMP	Reel Capacity		Shipping Weight		Size Index #
		ft	m	lbs	kg	
<b>Single Welding Cable</b> 600 V, 2/0 Cable						
T-1460-0	250	200	61	32	15	2
<b>Dual Side-by-Side Welding Cable (2)</b> 600 V, 2/0 Cable						
T-2462-0	250	200	61	51	23	5
<b>Dual Stacked Welding Cable (2)</b> 600 V, 2/0 Cable						
T-2464-0	250	200	61	62	28	4
<b>Dual Side-by-Side Power Cable/Air Hose</b>						
T-2735-2-0*	35	200	61	40	18	5
		150	45			

\*Air hose side has 1/2" (12.7mm) inlet.

		Dimensions - Size Index					
		4		5			
		in	mm	in	mm		
<b>A</b>	38	965	19	483			
<b>B</b>	18	457	18	457			
<b>C</b>	6	152	6	152			
<b>D</b>	6 1/2	165	6 1/2	165			
<b>E</b>	16 1/4	737	29	737			

Four 1/2" (12.7 mm) diameter mounting holes.

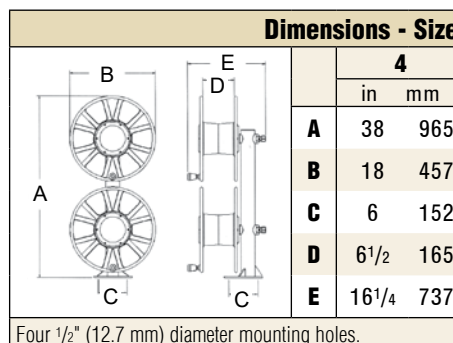

**Caution:** Compressed air hoses should not be converted to oxygen service. Compressed air hoses are often contaminated with an oil coating, which can react explosively when oxygen is introduced. Oxygen/Acetylene cannot be combined with welding cable or power cord. **Note:** Models listed are without hose and/or cable except where listed. Weights listed above are actual product weight without packaging materials. Safe-T-Reels are available with cable or hose and in various combinations. Please consult Reelcraft customer service for additional information.

Models listed with an icon can ship same day upon request when the order is received by 1:00 PM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse 
 Indiana & California Warehouses 
 California Warehouse 
 Canadian Warehouse

**Prop 65:** **WARNING:**  
Cancer and Reproductive Harm  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Customer Service: 1.855.634.9109  
All Other Calls: 1.800.444.3134








## Medium Duty Spring Retractable Reels Series RT

Made in USA 

Series RT is an economical choice for a medium duty, lighter weight, spring-driven hose reel for applications that are less demanding, yet require a product that can withstand industrial and commercial use. The industrial-grade drive spring is protected from the environment in a polypropylene spool for longer service life. Guide arm adjusts to seven positions.



RT650-OLP

Model w/ Hose	Hose I.D.		Hose Length		Max PSI**		NPT(M) Hose Outlet	NPT(F) Reel Inlet	Length		Width		Height		Shipping Weight	
	in	mm	ft	m	psi	bar	in	in	in	mm	in	mm	in	mm	lbs	kg
<b>Low Pressure Air / Water Reels</b>		Maximum temperature 150 °F (65 °C) **Maximum working pressure at 70 °F (20 °C)														
RT450-OLP 	1/4	6	50	15	300	21	1/4	3/8	16 1/2	419	6 1/4	159	17 7/8	454	24	11
RT635-OLP 	3/8	10	35	11	300	21	1/4	3/8	16 1/2	419	6 1/4	159	17 7/8	454	21	10
RT650-OLP 	3/8	10	50	15	300	21	1/4	1/2	16 1/2	419	6 1/4	159	17 7/8	454	27	12
RT835-OLP 	1/2	13	35	11	300	21	1/2	1/2	16 1/2	419	6 1/4	159	17 7/8	454	27	12
RT850-OLP 	1/2	13	50	15	300	21	1/2	1/2	16 1/2	419	7 3/4	197	17 7/8	454	37	17

\*Weight of model with hose. Additional lengths available as standard, contact manufacturer or go to reelcraft.com for master catalog listing.







## Premium Duty Spring Retractable Reels Series 4000 / 5000 / 5005

Series 4000, 5000 and 5005 reels are all-steel construction and compact for a wide range of applications with critical space requirements. A full flow shaft and swivel assures maximum product delivery. Guide arm adjusts to two positions. The standard low pressure hose is for air or water service only.

Made in USA 



5650 OLP

Model w/ Hose	Hose I.D.		Hose Length		Max PSI**		NPT(M) Hose Outlet	NPT(F) Reel Inlet	Length		Width		Height		Shipping Weight	
	in	mm	ft	m	psi	bar	in	in	in	mm	in	mm	in	mm	lbs	kg
<b>Low Pressure Air / Water Reels</b>		Maximum temperature 150 °F (65 °C) **Maximum working pressure at 70 °F (20 °C)														
4425 OLP 	1/4	6	25	8	300	21	1/4	3/8	12 5/8	321	5 5/8	143	12 7/8	327	19	9
5450 OLP 	1/4	6	50	15	300	21	1/4	3/8	14 1/4	362	6 1/8	156	14 3/8	365	26	12
4625 OLP 	3/8	10	25	8	300	21	1/4	3/8	12 5/8	321	5 5/8	143	12 7/8	327	20	9
5650 OLP 	3/8	10	50	15	300	21	1/4	3/8	16 3/4	425	5 7/8	149	17 5/8	448	25	11
A5825 OLP 	1/2	13	25	8	300	21	1/2	3/8	14 1/4	362	6 1/8	156	14 3/8	365	27	12
A5850 OLP 	1/2	13	50	15	300	21	1/2	3/8	16 3/4	425	7 1/4	184	17 5/8	448	41	19

\*Weight of model with hose. Additional lengths available as standard, contact manufacturer or go to reelcraft.com for master catalog listing.








## Heavy Duty Industrial Spring Retractable Reels Series 7000 / HD70000

Series 7000 and HD70000 are ideal for the most demanding applications. The base and guide arms are formed from high-grade steel and engineered with structural forms and gussets to yield the greatest amount of strength. The Series HD70000 includes a containerized drive spring and an aluminum hub with two sealed ball bearings.

Made in USA 



HD76100 OLP

Model w/ Hose	Hose I.D.		Hose Length		Max PSI**		NPT(M) Hose Outlet	NPT(F) Reel Inlet	Length		Width		Height		Shipping Weight	
	in	mm	ft	m	psi	bar	in	in	in	mm	in	mm	in	mm	lbs	kg
<b>Low Pressure Air / Water Reels</b>		Maximum temperature 150 °F (65 °C) **Maximum working pressure at 70 °F (20 °C)														
7650 OLP 	3/8	10	50	15	300	21	1/4	1/2	19 3/4	502	7	178	20 1/4	514	43	20
7670 OLP 	3/8	10	70	22	300	21	1/4	1/2	19 3/4	502	7	178	20 1/4	514	47	21
HD76075 OLP 	3/8	10	75	23	300	21	1/4	1/2	19 3/4	502	8 1/4	210	20 1/4	514	65	29
HD76100 OLP 	3/8	10	100	30	300	21	1/4	1/2	19 3/4	502	8 1/4	210	20 1/4	514	75	34
7850 OLP 	1/2	13	50	15	300	21	3/8	1/2	19 3/4	502	7	178	20 1/4	514	47	21
HD78075 OLP 	1/2	13	75	23	300	21	3/8	1/2	19 3/4	502	8 1/4	210	20 1/4	514	73	33
7925 OLP 	3/4	19	25	8	250	17	3/8	3/4	19 3/4	502	7	178	20 1/4	514	47	21

\*Weight of model with hose. Additional lengths available as standard, contact manufacturer or go to reelcraft.com for master catalog listing.

Models listed with an icon can ship same day upon request when the order is received by 1:00 PM Eastern Time for quantities of 10 or fewer.

 Indiana Warehouse

 Indiana & California Warehouses

 California Warehouse

 Canadian Warehouse

## Heavy Duty Hand Crank Reels Series 30000



CA33112 L



Reelcraft's series 30000 reels are designed for rugged, heavy duty applications requiring long lengths of hose and large storage capacity. All-bolted unitized construction with no welds to fatigue. Full flow shaft and ball bearing swivel (excludes 1/2" models) and heavy gauge steel frame, spool and drum ensure longest service life.

Model w/o Hose	Hose I.D.		Hose Length		Max PSI**		NPT(F) Reel Outlet	NPT(F) Reel Inlet	Length		Width		Height		Shipping Weight	
	in	mm	ft	m	psi	bar	in	in	in	mm	in	mm	in	mm	lbs	kg
CA32106 L	1/2	13	100	30	1000	69	1/2	1/2	17 <sup>3</sup> / <sub>4</sub>	451	19 <sup>3</sup> / <sub>4</sub>	502	20 <sup>1</sup> / <sub>4</sub>	514	40	18
CA32112 L	1/2	13	200	61	1000	69	1/2	1/2	17 <sup>3</sup> / <sub>4</sub>	451	25 <sup>3</sup> / <sub>4</sub>	654	20 <sup>1</sup> / <sub>4</sub>	514	46	21
CA32112 M	1/2	13	200	61	3000	207	1/2	1/2	17 <sup>3</sup> / <sub>4</sub>	451	25 <sup>3</sup> / <sub>4</sub>	654	20 <sup>1</sup> / <sub>4</sub>	514	46	21
CA33106 L	3/4	19	50	15	1000	69	3/4	3/4	17 <sup>3</sup> / <sub>4</sub>	451	19 <sup>3</sup> / <sub>4</sub>	502	20 <sup>1</sup> / <sub>4</sub>	514	41	19
CA33112 L	3/4	19	100	30	1000	69	3/4	3/4	17 <sup>3</sup> / <sub>4</sub>	451	25 <sup>3</sup> / <sub>4</sub>	654	20 <sup>1</sup> / <sub>4</sub>	514	46	21
CA33118 L	3/4	19	175	53	1000	69	3/4	3/4	17 <sup>3</sup> / <sub>4</sub>	451	31 <sup>3</sup> / <sub>4</sub>	806	20 <sup>1</sup> / <sub>4</sub>	514	51	23
CH37118 L	1	25	100	30	300	21	1	1	17 <sup>3</sup> / <sub>4</sub>	451	31 <sup>3</sup> / <sub>4</sub>	806	20 <sup>1</sup> / <sub>4</sub>	514	54	24

\*Weight of model with hose. Additional lengths available as standard, contact manufacturer or go to reelcraft.com for master catalog listing.

## Heavy Duty Cord Reels Series L4000 / L5000



Series L4000 and L5000 power cord and light reels offer many different styles of outlets and lamps. Easy to mount and structurally strong, the power cord and light reels have robotically welded heavy gauge steel frame that attaches to most structurally sound surfaces.



L 4050 163 10

L 4545 123 9G

Model w/ Cord	Accessory	Reel Capabilities					Reel Dimensions			Volts/Amps	Shpg. Wt.				
		Length		# Cond	AWG / mm	Type	Length	Width	Height		lbs	kg			
		ft	m										in	mm	in
L 4035 163 3	Single receptacle	35	11	3	16 1.33	SJTOW	12 <sup>5</sup> / <sub>8</sub>	321	9 <sup>3</sup> / <sub>8</sub>	239	13 <sup>1</sup> / <sub>4</sub>	337	125 / 13	25	11
L 4050 163 3	Single receptacle	50	15	3	16 1.33	SJTOW	12 <sup>5</sup> / <sub>8</sub>	321	9 <sup>3</sup> / <sub>8</sub>	239	13 <sup>1</sup> / <sub>4</sub>	337	125 / 13	26	12
L 4545 123 3	Single receptacle	45	14	3	12 3.32	SJE0OW	12 <sup>5</sup> / <sub>8</sub>	321	9 <sup>3</sup> / <sub>8</sub>	239	13 <sup>1</sup> / <sub>4</sub>	337	125 / 15	27	12
L 5550 123 3	Single receptacle	50	15	3	12 3.32	SJE0OW	16 <sup>1</sup> / <sub>2</sub>	419	10 <sup>1</sup> / <sub>2</sub>	267	17 <sup>1</sup> / <sub>2</sub>	445	125 / 15	44	20
L 4545 123 3A	Single connector	45	14	3	12 3.32	SJE0OW	12 <sup>5</sup> / <sub>8</sub>	321	9 <sup>3</sup> / <sub>8</sub>	239	13 <sup>1</sup> / <sub>4</sub>	337	125 / 20	28	13
L 5550 123 3A	Single connector	50	15	3	12 3.32	SJE0OW	16 <sup>1</sup> / <sub>2</sub>	419	10 <sup>1</sup> / <sub>2</sub>	267	17 <sup>1</sup> / <sub>2</sub>	445	125 / 20	44	20
L 4545 123 3B	Twist lock connector	45	14	3	12 3.32	SJE0OW	12 <sup>5</sup> / <sub>8</sub>	321	9 <sup>3</sup> / <sub>8</sub>	239	13 <sup>1</sup> / <sub>4</sub>	337	125 / 20	28	13
L 4545 123 7	Duplex outlet box w/GFCI (F)	45	14	3	12 3.32	SJE0OW	12 <sup>5</sup> / <sub>8</sub>	321	9 <sup>3</sup> / <sub>8</sub>	239	13 <sup>1</sup> / <sub>4</sub>	337	125 / 15	29	13
L 4545 123 7A	Duplex outlet box w/GFCI (F)	45	14	3	12 3.32	SJE0OW	12 <sup>5</sup> / <sub>8</sub>	321	9 <sup>3</sup> / <sub>8</sub>	239	13 <sup>1</sup> / <sub>4</sub>	337	125 / 20	29	13
L 5550 123 7*	Duplex outlet box w/GFCI (F)	50	15	3	12 3.32	SE0OW	16 <sup>1</sup> / <sub>2</sub>	419	10 <sup>1</sup> / <sub>2</sub>	267	17 <sup>1</sup> / <sub>2</sub>	445	125 / 20	45	20
L 4545 123 9	Triple tap receptacle	45	14	3	12 3.32	SJE0OW	12 <sup>5</sup> / <sub>8</sub>	321	9 <sup>3</sup> / <sub>8</sub>	239	13 <sup>1</sup> / <sub>4</sub>	337	125 / 15	28	13
L 4545 123 9G	Triple tap w/GFCI (F)	45	14	3	12 3.32	SJE0OW	12 <sup>5</sup> / <sub>8</sub>	321	9 <sup>3</sup> / <sub>8</sub>	239	13 <sup>1</sup> / <sub>4</sub>	337	125 / 15	29	13
L 4035 163 1	Incandescent	35	11	3	16 1.33	SJTOW	12 <sup>5</sup> / <sub>8</sub>	321	9 <sup>3</sup> / <sub>8</sub>	239	13 <sup>1</sup> / <sub>4</sub>	337	125 / 10	23	10
L 4050 163 1	Incandescent	50	15	3	16 1.33	SJTOW	12 <sup>5</sup> / <sub>8</sub>	321	9 <sup>3</sup> / <sub>8</sub>	239	13 <sup>1</sup> / <sub>4</sub>	337	125 / 10	27	12
L 4035 162 2	Fluorescent	35	11	2	16 1.33	SJTOW	12 <sup>5</sup> / <sub>8</sub>	321	9 <sup>3</sup> / <sub>8</sub>	239	13 <sup>1</sup> / <sub>4</sub>	337	125 / 0.3	26	11
L 4050 162 2	Fluorescent	50	15	2	16 1.33	SJTOW	12 <sup>5</sup> / <sub>8</sub>	321	9 <sup>3</sup> / <sub>8</sub>	239	13 <sup>1</sup> / <sub>4</sub>	337	125 / 0.3	26	12
L 4035 A 163 5**	Rubberized incandescent	35	11	3	16 1.33	SJOW	12 <sup>5</sup> / <sub>8</sub>	321	9 <sup>3</sup> / <sub>8</sub>	239	13 <sup>1</sup> / <sub>4</sub>	337	125 / 15	28	13
L 5245 A 163 6X**	Explosion-proof fluorescent	45	14	3	16 1.33	SEOW	13 <sup>1</sup> / <sub>2</sub>	343	10 <sup>1</sup> / <sub>2</sub>	267	14 <sup>1</sup> / <sub>2</sub>	368	125 / 0.13	39	18
L 4035 163 8	Fluorescent light and outlet	35	14	3	16 1.33	SJTO	12 <sup>5</sup> / <sub>8</sub>	321	9 <sup>3</sup> / <sub>8</sub>	239	13 <sup>1</sup> / <sub>4</sub>	337	125 / 13	25	11
L 4050 163 8	Fluorescent light and outlet	50	15	3	16 1.33	SJTO	12 <sup>5</sup> / <sub>8</sub>	321	9 <sup>3</sup> / <sub>8</sub>	239	13 <sup>1</sup> / <sub>4</sub>	337	125 / 13	27	12
L 4035 163 10	LED	35	11	3	16 1.33	SJTOW	12 <sup>5</sup> / <sub>8</sub>	321	9 <sup>3</sup> / <sub>8</sub>	239	13 <sup>1</sup> / <sub>4</sub>	337	125 / 13	26	12
L 4050 163 10	LED	50	15	3	16 1.33	SJTOW	12 <sup>5</sup> / <sub>8</sub>	321	9 <sup>3</sup> / <sub>8</sub>	239	13 <sup>1</sup> / <sub>4</sub>	337	125 / 13	28	13

For indoor non-weather tight applications only. Incandescent bulb 75 watt maximum. \*Inlet plug is NEMA5 - 15P configuration. Plug not set for 20 amps. \*\*Auto switch models. All models UL listed at 125 Volt 60 HZ single phase.

Models listed with an icon can ship same day upon request when the order is received by 1:00 PM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse Indiana & California Warehouses California Warehouse Canadian Warehouse

Customer Service: 1.855.634.9109  
All Other Calls: 1.800.444.3134



## North America and Corporate Headquarters

2842 E. Business Hwy 30  
Columbia City, IN 46725

**Customer Service:** 855-634-9109

Ph: 800-444-3134 • Fax: 800-444-4587

Ph: 260-248-8188 • Fax: 260-248-2605

reelcraft@reelcraft.com

**www.reelcraft.com**

## Latin America and the Middle East

Thompson International, Inc.

P.O. Box 12958, Ft. Wayne, IN 46866

Ph: 260-489-1685 • Fax: 260-489-0203

info@t-i-i.com

**www.reelcraft.com/latinamerica**

## Pacific Rim

P.O. Box 53776, Clark Freeport Zone  
Philippines 2023

Ph: +63 (45) 625-6624

Fax: +63 (45) 321-0643

rap@comclark.com

**www.reelcraft.com/asia**

## Europe

Unit 17 • Cronin Courtyard

Weldon South Industrial Estate

Corby • Northamptonshire NN18 8AG

United Kingdom

Ph: +44 (0) 1536 406999

Fax: +44 (0) 1536 406777

europa@reelcraft.com

**www.reelcraft.com/europe**

## China

Reelcraft Changzhou Co., Ltd.

Building C, No. 229 HeHai West Road

Changzhou, Jiangsu, China 213022

Ph: +86 (519) 8512 2391 ext. 8002

Fax: +86 (519) 8512 9309

rco@reelcraftchina.com

**www.reelcraftchina.com**

## Australia

PO Box 6463 BC, Blacktown

NSW 2148, Australia

Ph: +61 (2) 9621 8988

Fax: +61 (2) 9621 7688

sales@recoila.com

**www.reelcraft.com**