



**2015 CATALOG**  
INDUSTRIAL CARTS,  
WORKBENCHES & STORAGE

Manufactured by  
Brennan Equipment and Manufacturing Company  
[www.LittleGiant-USA.com](http://www.LittleGiant-USA.com)



## Quick Reference Index

| Item                                      |   |  | Page  |
|---|---|--|-------|
| Carts & Shelf Trucks                      |    |  | 3-16  |
| Platform Trucks                           |    |  | 17-24 |
| Wagons & Trailers                         |     |  | 25-29 |
| Nursery Carts                             |     |  | 30-31 |
| Sheet & Panel, Bar & Pipe Trucks, Dollies |     |  | 32-42 |
| Hand Trucks & Gas Cylinder Handling       |    |  | 43-49 |
| Secondary Containment                     |   |  | 50-52 |
| Storage & Security                        |  |  | 53-61 |
| Bulk Handling & Storage                   |  |  | 62-75 |
| Mobile Tables & Mobile Bench Cabinets     |  |  | 76-81 |
| Workbenches & Shop Tables                 |   |  | 82-93 |
| Safety & Wheels                           |   |  | 94-95 |

**SPECIFICATIONS:** If any particular dimension or specification is critical, it should be verified at time of order placement.

**CAPACITIES:** All capacities are based on Uniformly Distributed Loads (UDL). Do not exceed load capacities.

**WARRANTY:** Any product that has been subjected to normal use for which it is intended and is shown to be defective within one (1) year from date of purchase will be repaired or replaced at seller's option, provided such defect is reported promptly to the manufacturer. Authorization is required prior to returning.

### LITTLE GIANT PRODUCTS

Manufactured by  
**Brennan Equipment & Mfg. Inc.**  
 730 Central Ave.  
 University Park, IL 60484  
 Phone (708) 534-5500  
 FAX (708) 534-5520  
[www.LittleGiant-USA.com](http://www.LittleGiant-USA.com)





## Mobile Instrument Cart

1000 lbs. Capacity

This cushion-load cart is ideally suited for transporting delicate equipment or sensitive devices. Non-Conductive and sound-deadening wood composite top shelf has a full perimeter non-marking bumper to protect walls and furniture. Both the top shelf and lower shelf are covered with a non-slip vinyl surface. Top shelf measures 22"W x 36"L x 35"H, Lower Shelf 21-3/4"W x 29"L. Powder coated gray finish.

### CHOICE OF CASTERS

**FULL PNEUMATIC** – (2 swivel and 2 rigid) Shock absorbing wheels provide an air cushion ride. Inflation pressure of tires can be adjusted to provide the desired level of shock load reduction for different floor and load conditions.

**POLYURETHANE TREAD** – (4 swivel) Non-marking polyurethane tread for greater maneuverability under heavier load conditions, and where cushioning of shock loads is not as important.

| Model No.     | Casters  | Shelf Clearance | Wt. |
|---------------|--|-----------------|-----|
| MIC-2436      | 9" x 3" Pneumatic<br>2-swivel & 2-rigid              | 20"             | 90  |
| MIC-2436-5    | 5" x 1-1/4" Polyurethane<br>4-swivel                 | 25"             | 82  |
| MIC-2436-5TL  | 5" x 1-1/4" Polyurethane<br>4-swivel with total lock | 25"             | 83  |
| MIC-2436-10SR | 10" x 2-3/4" Solid Rubber<br>2-swivel & 2 rigid      | 20"             | 100 |



Model  
MIC-2436



These carts feature  
**NON-SLIP SHELVES**  
with Protective Bumper



Available with  
Total Lock Casters

## Instrument Cart with Drawer

Includes 13"W x 17"D x 4-1/2"H storage drawer with cylinder lock for added security. Powder coated gray finish.

| Model No.       | Casters   | Shelf Clearance | Wt. |
|-----------------|---|-----------------|-----|
| MIC-2436-DR     | 9" x 3" Pneumatic<br>2-swivel & 2-rigid         | 13"             | 108 |
| MIC-2436-5-DR   | 5" x 1-1/4" Polyurethane<br>4-swivel            | 18"             | 100 |
| MIC-2436-10SRDR | 10" x 2-3/4" Solid Rubber<br>2-swivel & 2 rigid | 13"             | 118 |



Model  
MIC-2436-5-DR

### ELECTRICALLY WIRED

## Mobile Work Center

With wheel brakes and storage drawer

Features UL listed 15 amp Power Tap with 6 grounded outlets, circuit breaker, switch, 15 ft. power cord and built-in cord wrap. Generous 13"W x 17"D x 4-1/2"H storage drawer with cylinder lock provides added security. Wheel brakes on swivel casters prevent unwanted movement. Powder coated gray finish.

| Model No.       | Casters  | Shelf Clearance | Wt. |
|-----------------|--|-----------------|-----|
| MIC-8BK-PSDR    | 9" x 3" Pneumatic<br>2 swivel w/brakes & 2-rigid         | 13"             | 113 |
| MIC-5BK-PSDR    | 5" x 1-1/4" Polyurethane<br>4 swivel w/brakes            | 18"             | 105 |
| MIC-5TL-PSDR    | 5" x 1-1/4" Polyurethane<br>4-swivel with total lock     | 18"             | 106 |
| MIC-10SRBK-PSDR | 10" x 2-3/4" Solid Rubber<br>2-swivel w/brakes & 2-rigid | 13"             | 123 |



Model  
MIC-8BK-PSDR





Model  
GF-2448-9PM

## Flush-Handle Instrument Cart

1200 lbs. Capacity

Flush handle allows transporting of oversized items. Provides a cushioned ride with 9" pneumatic casters, 2 swivel, 2 rigid. Top shelf 34" high. Shelves are available with a 1-1/2" retaining lip or with flush edges. Available with non-slip vinyl shelf surfaces, or smooth steel. Shelf clearance 18" with lipped shelves, 19-1/2" with flush shelves. Powder coated gray finish.

| Shelf Size                           | LIP SHELVES Model No. | FLUSH SHELVES Model No. | Wt. |
|--------------------------------------|-----------------------|-------------------------|-----|
| <b>Non-Slip Vinyl Shelf Surfaces</b> |                       |                         |     |
| 24 x 36                              | GLF-2436-9PM          | GF-2436-9PM             | 96  |
| 24 x 48                              | GLF-2448-9PM          | GF-2448-9PM             | 111 |
| 30 x 48                              | GLF-3048-9PM          | GF-3048-9PM             | 131 |
| <b>Without Vinyl Shelf Surfaces</b>  |                       |                         |     |
| 24 x 36                              | GLF-2436-9P           | GF-2436-9P              | 92  |
| 24 x 48                              | GLF-2448-9P           | GF-2448-9P              | 106 |
| 30 x 48                              | GLF-3048-9P           | GF-3048-9P              | 124 |

Wheel brakes on swivel casters option, add: **-BK**



Model  
3G-2448-9PM

## Three-Shelf Instrument Carts

1200 lbs. Capacity

Provides cushioned transport with 2 swivel and two rigid 9" pneumatic casters. Overall height 45". Shelf clearance 13-3/4" with lip shelves, 14-1/2" with flush shelves. All-welded construction with durable powder coated gray finish.

| Shelf Size                           | LIP SHELVES Model No. | FLUSH SHELVES Model No. | Wt. |
|--------------------------------------|-----------------------|-------------------------|-----|
| <b>Non-Slip Vinyl Shelf Surfaces</b> |                       |                         |     |
| 24 x 36                              | 3GL-2436-9PM          | 3G-2436-9PM             | 124 |
| 24 x 48                              | 3GL-2448-9PM          | 3G-2448-9PM             | 147 |
| 30 x 48                              | 3GL-3048-9PM          | 3G-3048-9PM             | 172 |
| <b>Without Vinyl Shelf Surfaces</b>  |                       |                         |     |
| 24 x 36                              | 3GL-2436-9P           | 3G-2436-9P              | 118 |
| 24 x 48                              | 3GL-2448-9P           | 3G-2448-9P              | 139 |
| 30 x 48                              | 3GL-3048-9P           | 3G-3048-9P              | 162 |

Wheel brakes on swivel casters option, add: **-BK**



Model  
IP-2448-9PM

## Mobile Instrument Table

1200 lbs. Capacity

Maneuvers over rough surfaces with 4 swivel casters and 9" pneumatic wheels. Available with non-slip vinyl shelf surfaces, or smooth steel. Welded construction for maximum durability. Top shelf height 34", shelf clearance 19-1/2". Powder coated gray finish.

| Shelf Size                           | Model No.   | Wt. |
|--------------------------------------|-------------|-----|
| <b>Non-Slip Vinyl Shelf Surfaces</b> |             |     |
| 24 x 36                              | IP-2436-9PM | 96  |
| 24 x 48                              | IP-2448-9PM | 112 |
| 30 x 48                              | IP-3048-9PM | 131 |
| <b>Without Vinyl Shelf Surfaces</b>  |             |     |
| 24 x 36                              | IP-2436-9P  | 92  |
| 24 x 48                              | IP-2448-9P  | 107 |
| 30 x 48                              | IP-3048-9P  | 124 |

Wheel brakes on swivel casters option, add: **-BK**



## Instrument Cart with Hand Guard

1200 lbs. Capacity

Welded steel construction ships ready for immediate use. Full pneumatic 9" casters provide an air cushion ride. Top shelf height 34". Shelf edges available with 1-1/2" retaining lip, or flush edges. Shelf clearance 18" with lipped shelves, 19-1/2" with flush shelves. Available with non-slip vinyl shelf surfaces, or smooth steel surfaces. Powder coated gray finish.

| Shelf Size                           | LIP SHELVES Model No. | FLUSH SHELVES Model No. | Wt. |
|--------------------------------------|-----------------------|-------------------------|-----|
| <b>Non-Slip Vinyl Shelf Surfaces</b> |                       |                         |     |
| 24 x 36                              | GL-2436-9PM           | G-2436-9PM              | 99  |
| 24 x 48                              | GL-2448-9PM           | G-2448-9PM              | 113 |
| 30 x 48                              | GL-3048-9PM           | G-3048-9PM              | 134 |
| <b>Without Vinyl Shelf Surfaces</b>  |                       |                         |     |
| 24 x 36                              | GL-2436-9P            | G-2436-9P               | 95  |
| 24 x 48                              | GL-2448-9P            | G-2448-9P               | 109 |
| 30 x 48                              | GL-3048-9P            | G-3048-9P               | 127 |

Wheel brakes on swivel casters option, add: **-BK**



Model  
G-2436-9PM

## Instrument Cart with Writing Shelf and Storage Pocket

1200 lbs. Capacity

Convenient writing shelf measures 21" wide x 12" long. Sloped storage pocket measures 14" wide x 12-1/2" long with 4-3/4" access height. 9" pneumatic casters, 2 swivel and 2 rigid. Top shelf height 34", overall height 39". Powder coated gray finish.

| Shelf Size                           | LIP SHELVES Model No. | FLUSH SHELVES Model No. | Wt. |
|--------------------------------------|-----------------------|-------------------------|-----|
| <b>Non-Slip Vinyl Shelf Surfaces</b> |                       |                         |     |
| 24 x 36                              | GL-2436-9PM-WSP       | G-2436-9PM-WSP          | 117 |
| 24 x 48                              | GL-2448-9PM-WSP       | G-2448-9PM-WSP          | 133 |
| <b>Without Vinyl Shelf Surfaces</b>  |                       |                         |     |
| 24 x 36                              | GL-2436-9P-WSP        | G-2436-9P-WSP           | 113 |
| 24 x 48                              | GL-2448-9P-WSP        | G-2448-9P-WSP           | 127 |



Model  
G-2436-9PM-WSP

## Low Deck Instrument Cart

1200 lbs. Capacity

Cushion load 9" pneumatic casters with a 26" Top Shelf height and 11-1/2" shelf clearance. Bottom shelf has 1-1/2" retaining lip. Top shelf available with lip or flush edge. Available with non-slip vinyl shelf surfaces, or smooth steel. All-welded construction with 12 gauge shelves. Powder coated gray finish.

| Shelf Size                           | LIP SHELVES Model No. | FLUSH TOP SHELF Model No. | Wt. |
|--------------------------------------|-----------------------|---------------------------|-----|
| <b>Non-Slip Vinyl Shelf Surfaces</b> |                       |                           |     |
| 24 x 36                              | LKL-2436-9PM          | LK-2436-9PM               | 107 |
| 24 x 48                              | LKL-2448-9PM          | LK-2448-9PM               | 126 |
| 30 x 48                              | LKL-3048-9PM          | LK-3048-9PM               | 140 |
| <b>Without Vinyl Shelf Surfaces</b>  |                       |                           |     |
| 24 x 36                              | LKL-2436-9P           | LK-2436-9P                | 105 |
| 24 x 48                              | LKL-2448-9P           | LK-2448-9P                | 123 |
| 30 x 48                              | LKL-3048-9P           | LK-3048-9P                | 135 |

Wheel brakes on swivel casters option, add: **-BK**



Model  
LK-2448-9PM



Model  
LGL-2436-BRK



Model  
3LGL-2436-BRK



Model  
LG-2436-BK-2DR



Model  
LG-2436-6PY

## Welded Service Carts

1200 lbs. or 2000 lbs. Capacity

Little Giant durability in an economical shelf truck. These all-welded units ship fully assembled. Heavy 12 gauge shelves. Bottom shelf has retaining lip for small parts. Top shelf is available with lip up or down (flush top). Available in either 1200 lbs. or 2000 lbs. Capacity. Durable powder coated finish.

### 1200 lbs. Capacity

5" Non-marking polyurethane casters; OAH 35".

|                                | Shelf Size | LIP SHELVES   | FLUSH TOP (& MIDDLE) | Wt. |
|--------------------------------|------------|---------------|----------------------|-----|
| 2 SHELF<br>25" Shelf Clearance | 18 x 24    | LGL-1824-BRK  | LG-1824-BRK          | 55  |
|                                | 18 x 32    | LGL-1832-BRK  | LG-1832-BRK          | 65  |
|                                | 24 x 36    | LGL-2436-BRK  | LG-2436-BRK          | 84  |
|                                | 24 x 48    | LGL-2448-BRK  | LG-2448-BRK          | 103 |
|                                | 30 x 48    | LGL-3048-BRK  | LG-3048-BRK          | 125 |
|                                | 30 x 60    | LGL-3060-BRK  | LG-3060-BRK          | 152 |
| 3 SHELF<br>11-3/4" Clearance   | 18 x 24    | 3LGL-1824-BRK | 3LG-1824-BRK         | 72  |
|                                | 18 x 32    | 3LGL-1832-BRK | 3LG-1832-BRK         | 87  |
|                                | 24 x 36    | 3LGL-2436-BRK | 3LG-2436-BRK         | 115 |
|                                | 24 x 48    | 3LGL-2448-BRK | 3LG-2448-BRK         | 150 |
|                                | 30 x 48    | 3LGL-3048-BRK | 3LG-3048-BRK         | 177 |

Standard with 2 swivel casters with brakes and 2 rigid casters. Also available with 4 swivel casters with brakes, add: **-S-BRK**.

### With Storage Drawer 1200 lbs. Capacity

Accessory drawer with cylinder lock and 2 keys measures 13" wide x 17" deep x 4-1/2" high, offers secure storage.

|          | Shelf Size | LIP SHELVES     | FLUSH TOP      | Wt. |
|----------|------------|-----------------|----------------|-----|
| 1 Drawer | 24 x 36    | LGL-2436-BK-DR  | LG-2436-BK-DR  | 97  |
|          | 24 x 48    | LGL-2448-BK-DR  | LG-2448-BK-DR  | 116 |
| 2 Drawer | 24 x 36    | LGL-2436-BK-2DR | LG-2436-BK-2DR | 84  |
|          | 24 x 48    | LGL-2448-BK-2DR | LG-2448-BK-2DR | 103 |

### 2000 lbs. Capacity

6" Non-marking polyurethane casters; OAH 36-1/2".

|                                | Shelf Size | LIP SHELVES   | FLUSH TOP (& MIDDLE) | Wt. |
|--------------------------------|------------|---------------|----------------------|-----|
| 2 SHELF<br>25" Shelf Clearance | 24 x 36    | LGL-2436-6PY  | LG-2436-6PY          | 97  |
|                                | 24 x 48    | LGL-2448-6PY  | LG-2448-6PY          | 116 |
|                                | 30 x 48    | LGL-3048-6PY  | LG-3048-6PY          | 138 |
|                                | 30 x 60    | LGL-3060-6PY  | LG-3060-6PY          | 165 |
|                                | 24 x 36    | 3LGL-2436-6PY | 3LG-2436-6PY         | 128 |
| 3 SHELF<br>11-3/4" Clearance   | 24 x 48    | 3LGL-2448-6PY | 3LG-2448-6PY         | 163 |
|                                | 30 x 48    | 3LGL-3048-6PY | 3LG-3048-6PY         | 190 |
|                                | 30 x 60    | 3LGL-3060-6PY | 3LG-3060-6PY         | 230 |



## Heavy-Duty Shelf Truck

3600 lbs. Capacity

12 gauge shelves handle the heaviest of loads. Shelves available with flush edges, or with 1-1/2" retaining lip. 2 swivel and 2 rigid casters with 6" x 2" hard tread phenolic wheels for added maneuverability under heavy loads. Swivel casters have wheel brakes to stop unwanted movement when loading and unloading. 36" overall height.

|         | W x L x H    | LIP SHELVES<br>24" Clearance | FLUSH SHELVES<br>25-1/2" Clearance | Wt. |
|---------|--------------|------------------------------|------------------------------------|-----|
| 2 Shelf | 24 x 36 x 36 | 2GL-2436-6PHBK               | 2G-2436-6PHBK                      | 112 |
|         | 24 x 48 x 36 | 2GL-2448-6PHBK               | 2G-2448-6PHBK                      | 138 |
|         | 30 x 48 x 36 | 2GL-3048-6PHBK               | 2G-3048-6PHBK                      | 154 |
|         | 30 x 60 x 36 | 2GL-3060-6PHBK               | 2G-3060-6PHBK                      | 182 |
|         | W x L x H    | LIP SHELVES<br>11" Clearance | FLUSH SHELVES<br>12" Clearance     | Wt. |
| 3 Shelf | 24 x 36 x 36 | 3GL-2436-6PHBK               | 3G-2436-6PHBK                      | 156 |
|         | 24 x 48 x 36 | 3GL-2448-6PHBK               | 3G-2448-6PHBK                      | 185 |
|         | 30 x 48 x 36 | 3GL-3048-6PHBK               | 3G-3048-6PHBK                      | 201 |
|         | 30 x 60 x 36 | 3GL-3060-6PHBK               | 3G-3060-6PHBK                      | 251 |

For 6" Mold-on Rubber with Brakes, add wheel code: **-6MRBK** (2000 lbs. Capacity)  
 For 6" Polyurethane with Brakes, add wheel code: **-6PYBK** (3600 lbs. Capacity)  
 Floor Lock Option, add: **-FL**



Model  
2G-2448-6PHBK



Model  
3G-2436-6PHBK

## Extra-Heavy-Duty Shelf Truck

5000 lbs. Capacity

All-welded construction features flush 12 gauge steel shelves with extra reinforcement and 2" x 2" corner angles for increased capacity. Top shelf is 36" high. Clearance between shelves is 23" for 2-shelf models, and 10-1/2" for 3-shelf models. Easily maneuverable with heavy-duty 8" phenolic wheels. Durable powder coated finish.

| Shelf Size | 2 SHELVES<br>Model No. | Wt. | 3 SHELVES<br>Model No. | Wt. |
|------------|------------------------|-----|------------------------|-----|
| 24 x 36    | GH-8V2-1               | 160 | 3GH-8V2-1              | 192 |
| 24 x 48    | GH-8V2-2               | 175 | 3GH-8V2-2              | 217 |
| 30 x 48    | GH-8V2-5               | 193 | 3GH-8V2-5              | 245 |
| 30 x 60    | GH-8V2-4               | 219 | 3GH-8V2-4              | 283 |
| 36 x 72    | GH-8V2-6               | 280 | 3GH-8V2-6              | 370 |

4 swivel caster option, add: **-BKPL** (2 with wheel brakes, and 2 with swivel locks that convert from swivel to rigid casters)  
 Floor Lock Option, add: **-FL** (Stops unwanted movement when loading or unloading)



Model  
GH-8V2-2BKPL



Model  
3GH-8V2-5FL  
with Floor Lock Option



Optional 4 Position  
Swivel Lock



Optional Floor Lock






**Model  
GL-2448-8MR**



Floor Lock Option, add: **-FL**  
Stops unwanted movement when loading or unloading

**Flush Shelves**



**Lip Shelves**

### Flush Shelves "G-"

Models have flush shelves for easier loading and unloading of larger, more bulky items.

### Lip Shelves "GL-"

Models feature 1-1/2" lip to retain small parts.



**Model  
G-2448-10SR**



9" x 3"  
Pneumatic Casters

## Merchandise Collectors

**2000 lbs. to 3600 lbs. Capacity**

Shelves are formed from 12 gauge steel with structural angle corners and shelf reinforcements on shelves longer than 36". Shelves are available with 1-1/2" lip, or with flush edges. Raised offset handle includes cross brace hand guard for added safety. These welded units are shipped set up and ready for immediate use, with 2 swivel and 2 rigid casters. Shelf clearance 18" with lipped shelves, 19-1/2" with flush shelves.

| Capacity & Wheels  | Shelf Size WxL | Lip Edge Shelves Model No. | Flush Edge Shelves Model No. | Wt. |
|--|----------------|----------------------------|------------------------------|-----|
| <b>8" x 2" Polyurethane w/Brakes</b><br>3600 lbs.<br>Top Shelf 32" H | 24 x 36        | GL-2436-8PYBK              | G-2436-8PYBK                 | 111 |
|  | 24 x 48        | GL-2448-8PYBK              | G-2448-8PYBK                 | 136 |
|  | 30 x 48        | GL-3048-8PYBK              | G-3048-8PYBK                 | 154 |
|  | 30 x 60        | GL-3060-8PYBK              | G-3060-8PYBK                 | 180 |
| <b>8" x 2" Mold-on Rubber Tired</b><br>2400 lbs.<br>Top Shelf 32" H  | 24 x 36        | GL-2436-8MR                | G-2436-8MR                   | 128 |
|  | 24 x 48        | GL-2448-8MR                | G-2448-8MR                   | 153 |
|  | 30 x 48        | GL-3048-8MR                | G-3048-8MR                   | 171 |
|  | 30 x 60        | GL-3060-8MR                | G-3060-8MR                   | 197 |
| <b>6" x 2" Mold-on Rubber Tired</b><br>2000 lbs.<br>Top Shelf 30" H  | 24 x 36        | GL-2436-6MR                | G-2436-6MR                   | 120 |
|  | 24 x 48        | GL-2448-6MR                | G-2448-6MR                   | 145 |
|  | 30 x 48        | GL-3048-6MR                | G-3048-6MR                   | 163 |
|  | 30 x 60        | GL-3060-6MR                | G-3060-6MR                   | 189 |

## Cushion-Load Merchandise Collectors

**1200 lbs. to 1500 lbs. Capacity**

Cushion-load casters for use over rough or uneven surfaces. Raised offset handle with cross brace hand guard for added safety. Heavy gauge shelves with 1-1/2" lip or flush edges. Shelf clearance 18" with lipped shelves, 19-1/2" with flush shelves. All-welded construction (except casters) with durable powder coated gray finish.

| Capacity & Wheels   | Shelf Size WxL | Lip Edge Shelves Model No. | Flush Edge Shelves Model No. | Wt. |
|---|----------------|----------------------------|------------------------------|-----|
| <b>9" x 3" Pneumatic</b><br>1200 lbs.<br>Top Shelf 34" H                    | 24 x 36        | GL-2436-9P                 | G-2436-9P                    | 95  |
|   | 24 x 48        | GL-2448-9P                 | G-2448-9P                    | 109 |
|   | 30 x 48        | GL-3048-9P                 | G-3048-9P                    | 127 |
| <b>10" x 2.75" Puncture-Proof Rubber</b><br>1500 lbs.<br>Top Shelf 34-1/2"H | 24 x 36        | GL-2436-10SR               | G-2436-10SR                  | 104 |
|   | 24 x 48        | GL-2448-10SR               | G-2448-10SR                  | 118 |
|   | 30 x 48        | GL-3048-10SR               | G-3048-10SR                  | 136 |
|   | 30 x 60        | GL-3060-10SR               | G-3060-10SR                  | 152 |

Floor Lock Option, add: **-FL**





## Ergonomic Shelf Trucks

**1200 lbs. Capacity**

Ergonomic handle provides a more natural, comfortable grip that reduces wrist strain. Unique design also functions as a hand guard for added protection. The 2 swivel and 2 rigid 5" x 1-1/4" casters with non-marking polyurethane wheels provide the best combination of reduced rolling resistance and quiet operation. Wheel brakes on swivel casters are standard. All-welded construction with heavy 12 gauge shelves, these units ship fully assembled and ready for use. Bottom shelf has a 1-1/2" retaining lip for small parts. Top shelf is 35" above ground, and is available with lip up or down (flush top).

|  | Shelf Size | Lip Edge Shelves | Flush Top (& Center) | Wt. |
|--|------------|------------------|----------------------|-----|
| <b>2 SHELF<br/>25" Shelf Clearance</b> | 24 x 36    | ERLGL-2436-BRK   | ERLG-2436-BRK        | 85  |
|  | 24 x 48    | ERLGL-2448-BRK   | ERLG-2448-BRK        | 104 |
|  | 30 x 48    | ERLGL-3048-BRK   | ERLG-3048-BRK        | 126 |
|  | 30 x 60    | ERLGL-3060-BRK   | ERLG-3060-BRK        | 155 |
| <b>3 SHELF<br/>11-3/4" Clearance</b>   | 24 x 36    | 3ERLGL-2436-BRK  | 3ERLG-2436-BRK       | 124 |
|  | 24 x 48    | 3ERLGL-2448-BRK  | 3ERLG-2448-BRK       | 154 |
|  | 30 x 48    | 3ERLGL-3048-BRK  | 3ERLG-3048-BRK       | 183 |



**Model  
ERLG-2436-BRK**



**Model  
3ERLG-2436-BRK**

## Heavy-Duty Ergonomic Shelf Trucks

**3600 lbs. Capacity**

Ergonomic handle provides a more natural, comfortable grip. Heavy-duty design also functions as a hand guard for added protection. The 2 swivel and 2 rigid casters with non-marking 8" x 2" polyurethane wheels provide the best combination of reduced rolling resistance and quiet operation. Wheel brakes on swivel casters are standard. All-welded construction with heavy 12 gauge shelves, available with 1-1/2" lip of with flush edges. Shelf clearance 21" with lipped shelves, 22-1/2" with flush shelves. Top shelf height 35".

| Shelf Size | Lip Edge Shelves | Flush Edge Shelves | Wt. |
|------------|------------------|--------------------|-----|
| 24 x 36    | ERGL-2436-8PYBK  | ERG-2436-8PYBK     | 112 |
| 24 x 48    | ERGL-2448-8PYBK  | ERG-2448-8PYBK     | 137 |
| 30 x 48    | ERGL-3048-8PYBK  | ERG-3048-8PYBK     | 155 |
| 30 x 60    | ERGL-3060-8PYBK  | ERG-3060-8PYBK     | 181 |



**Model  
ERGL-2448-8PYBK**

Floor Lock Option, add: **-FL**



**Model**  
**DS1830X3-5PY**

### 3-Inch Deep Shelf Trucks

These trucks combine the convenience of 3" deep trays for accumulating and transporting smaller parts with the rugged durability of an all-welded unit. Shelves are formed from 12 gauge steel, with 3" high sides. 2 swivel and 2 rigid non-marking polyurethane casters for easy maneuverability and quiet operation. Clearance between shelves is 22-1/2".

**1200 lbs. Capacity;** 5" Polyurethane casters, 35" overall height

**3600 lbs. Capacity;** 6" Polyurethane casters, 36-1/2" overall height

| Shelf Size | 1200 LBS. CAPACITY |     | 3600 LBS. CAPACITY |     |
|------------|--------------------|-----|--------------------|-----|
|            | Model No.          | Wt. | Model No.          | Wt. |
| 18 x 30    | DS1830X3-5PY       | 71  | DS1830X3-6PY       | 81  |
| 24 x 36    | DS2436X3-5PY       | 95  | DS2436X3-6PY       | 105 |
| 24 x 48    | DS2448X3-5PY       | 122 | DS2448X3-6PY       | 132 |
| 30 x 60    | -                  | -   | DS3060X3-6PY       | 181 |



**Model**  
**DS2436X6-6PY**

### 6-Inch Deep Shelf Trucks

The extra carrying capacity of the 6" high shelf lips, combined with the heavy 12 gauge welded construction make these trucks ideal for heavier applications. Shelves are formed from a single sheet of steel and welded in place, resulting in an extremely rigid, durable unit. Polyurethane casters roll quietly and more easily under heavier load conditions. Clearance between shelves is 16-1/2".

**1200 lbs. Capacity;** 5" Polyurethane casters, 35" overall height

**3600 lbs. Capacity;** 6" Polyurethane casters, 36-1/2" overall height

| Shelf Size | 1200 LBS. CAPACITY |     | 3600 LBS. CAPACITY |     |
|------------|--------------------|-----|--------------------|-----|
|            | Model No.          | Wt. | Model No.          | Wt. |
| 18 x 30    | DS1830X6-5PY       | 87  | DS1830X6-6PY       | 97  |
| 24 x 36    | DS2436X6-5PY       | 116 | DS2436X6-6PY       | 126 |
| 24 x 48    | -                  | -   | DS2448X6-6PY       | 157 |



**Model**  
**DS2436X12-6PY**

### 12-Inch Deep Shelf Truck

Shelves are all-welded 12 gauge. Top shelf has 12" lip for maximum capacity, bottom shelf has 1-1/2" lip. Non-marking polyurethane casters are quiet rolling and move easier under heavier load conditions. Shelf clearance is 15".

**1200 lbs. Capacity;** 5" Polyurethane casters, 35" overall height

**3600 lbs. Capacity;** 6" Polyurethane casters, 36-1/2" overall height

| Shelf Size | 1200 LBS. CAPACITY |     | 3600 LBS. CAPACITY |     |
|------------|--------------------|-----|--------------------|-----|
|            | Model No.          | Wt. | Model No.          | Wt. |
| 18 x 30    | DS1830X12-5PY      | 91  | DS1830X12-6PY      | 101 |
| 24 x 36    | DS2436X12-5PY      | 122 | DS2436X12-6PY      | 132 |
| 24 x 48    | -                  | -   | DS2448X12-6PY      | 165 |



## Cushion Load Deep Shelf Trucks

1200 lbs. Capacity

Large, cushion-load wheels roll over rough and uneven surfaces, and deep top trays help to retain the load. All-welded construction with 12 gauge shelves ships fully assembled and ready for immediate use. Durable powder coated finish. 9" Pneumatic casters, 36" overall height, 10" Puncture-proof solid rubber casters, 36-1/2" overall height.

### 3-Inch Deep Top Shelf

Bottom shelf 1-1/2" deep, 20" shelf clearance.

| Shelf Size<br>W x L | 9" x 3" Pneumatic Casters |     | 10" x 2.75" Solid Rubber Puncture-Proof Casters |     |
|---------------------|---------------------------|-----|---|-----|
|                     | Model No.                 | Wt. | Model No.                                       | Wt. |
| 24 x 36             | DS-2436X3-9P              | 101 | DS-2436X3-10SR                                  | 106 |
| 24 x 48             | DS-2448X3-9P              | 127 | DS-2448X3-10SR                                  | 132 |
| 30 x 60             | DS-3060X3-9P              | 171 | DS-3060X3-10SR                                  | 176 |



Model  
DS-2436X3-9P



Model  
DS-2436X6-9P

### 6-Inch Deep Top Shelf

Bottom shelf 1-1/2" deep, 17" shelf clearance.

| Shelf Size<br>W x L | 9" x 3" Pneumatic Casters |     | 10" x 2.75" Solid Rubber Puncture-Proof Casters |     |
|---------------------|---------------------------|-----|---|-----|
|                     | Model No.                 | Wt. | Model No.                                       | Wt. |
| 24 x 36             | DS-2436X6-9P              | 122 | DS-2436X6-10SR                                  | 127 |
| 24 x 48             | DS-2448X6-9P              | 136 | DS-2448X6-10SR                                  | 141 |



Model  
DS-2436X12-9P

### 12-Inch Deep Top Shelf

Bottom shelf 1-1/2" deep, 11" shelf clearance.

| Shelf Size<br>W x L | 9" x 3" Pneumatic Casters |     | 10" x 2.75" Solid Rubber Puncture-Proof Casters |     |
|---------------------|---------------------------|-----|---|-----|
|                     | Model No.                 | Wt. | Model No.                                       | Wt. |
| 24 x 36             | DS-2436X12-9P             | 135 | DS-2436X12-10SR                                 | 140 |
| 24 x 48             | DS-2448X12-9P             | 168 | DS-2448X12-10SR                                 | 173 |

## Deep Shelf Order Picking Truck

Sloped storage pocket under the 12" long Writing Shelf measures 14" wide x 12-1/2" long x 4-3/4" access height. Deep Tray Shelves help contain loads. Durable all-welded construction with 12 gauge shelves and a powder coated finish. Non-marking 6" x 2" polyurethane casters. 3600 lbs. capacity.

| Shelf Size<br>W x L | 3" Deep Shelves<br>22-1/2" Shelf Clearance |     | 6" Deep Shelves<br>16-1/2" Shelf Clearance |     |
|---------------------|--|-----|--|-----|
|                     | Model No.                                  | Wt. | Model No.                                  | Wt. |
| 18 x 30             | DS1830X3-6PYWSP                            | 101 | DS1830X6-6PYWSP                            | 117 |
| 24 x 36             | DS2436X3-6PYWSP                            | 125 | DS2436X6-6PYWSP                            | 146 |
| 24 x 48             | DS2448X3-6PYWSP                            | 152 | DS2448X6-6PYWSP                            | 177 |

| Shelf Size<br>W x L | 12" Deep Top Shelf<br>1-1/2" Deep Bottom Shelf<br>15" Shelf Clearance |     |
|---------------------|---|-----|
|                     | Model No.   | Wt. |
| 18 x 30             | DS1830X126PYWSP   | 121 |
| 24 x 36             | DS2436X126PYWSP   | 152 |
| 24 x 48             | DS2448X126PYWSP   | 185 |



Model  
DS2436X6-6PYWSP





Model  
AM-3A-2448-6PY

## Adjustable Height Multi-Shelf Truck

Shelves are uber-adjustable: height, slope, lip or flush edge. Available with either 2 or 3 adjustable 14 gauge shelves which can be bolted in place with their 1-1/2" lip edges facing either up or down. Shelves can be level, or positioned with a 7° or 15° slope. Bottom shelf is fixed with a 1-1/2" retaining lip. Shelf heights are adjustable in 2-1/4" increments on the 48" tall shelf supports. Two swivel and 2 rigid casters have 6" x 2" non-marking polyurethane wheels.

| Shelf Size | 2 Adjustable Shelves and fixed base |     | 3 Adjustable Shelves and fixed base |     |
|------------|-------------------------------------|-----|-------------------------------------|-----|
|            | Model No.                           | Wt. | Model No.                           | Wt. |
| 24 x 48    | AM-2A-2448-6PY                      | 167 | AM-3A-2448-6PY                      | 198 |
| 24 x 60    | AM-2A-2460-6PY                      | 191 | AM-3A-2460-6PY                      | 229 |



Model  
AM-2A-2448-6PY



Model  
TS-1832-5PY

## Tray Trucks

800 lbs. Capacity

All-welded Tray Trucks ship set up and ready for immediate use. Heavy 12 gauge formed shelves are welded to 14 gauge tubular steel uprights with integral handles on both ends. Non-marking 5" x 1-1/4" polyurethane casters, 2 swivel and 2 rigid. Overall height is 36".



Model  
TU-2436-5PY

| Shelf Size | 1-1/2" DEEP TRAYS<br>22" Shelf Clearance |     | 3" DEEP TRAYS<br>19" Shelf Clearance |     | 6" DEEP TRAYS<br>13" Shelf Clearance |     |
|------------|--|-----|--------------------------------------|-----|--------------------------------------|-----|
|            | Model No.                                | Wt. | Model No.                            | Wt. | Model No.                            | Wt. |
| 18 x 24    | TS-1824-5PY                              | 54  | -                                    | -   | -                                    | -   |
| 18 x 30    | -  | -   | TT-1830-5PY                          | 69  | TU-1830-5PY                          | 97  |
| 18 x 32    | TS-1832-5PY                              | 66  | -                                    | -   | -                                    | -   |
| 24 x 36    | TS-2436-5PY                              | 85  | TT-2436-5PY                          | 92  | TU-2436-5PY                          | 126 |

## Tray Trucks with Drawer

800 lbs. Capacity

Available with large locking storage drawer that conveniently opens below the handle. Drawer measures 13"W x 17"L x 4-1/2"H.



Model  
TT-1830-5PY-DR

| Shelf Size | TS TRUCKS WITH<br>1-1/2" DEEP TRAYS |     | TT TRUCKS WITH<br>3" DEEP TRAYS |     |
|------------|-------------------------------------|-----|---------------------------------|-----|
|            | Model No.                           | Wt. | Model No.                       | Wt. |
| 18 x 24    | TS-1824-5PY-DR                      | 72  | -                               | -   |
| 18 x 30    | -                                   | -   | TT-1830-5PY-DR                  | 87  |
| 18 x 32    | TS-1832-5PY-DR                      | 84  | -                               | -   |
| 24 x 36    | TS-2436-5PY-DR                      | 103 | TT-2436-5PY-DR                  | 110 |

OPTIONS: -S with 4 swivel casters



## Multi-Shelf Trucks

### Storage Rack on Wheels

Heavy-duty trucks with three, four, or five shelves. All-welded 12 gauge steel shelves provide plenty of space to transport your large loads. Also used as portable storage racks that can be moved for cleaning, or to different locations as your storage requirements change. Two rigid and two swivel casters with 6" x 2" phenolic wheels. Comfortable formed 1" tubular steel push handle. Shelves available flush or with 1-1/2" retaining lip. 3600 lbs. capacity.

|                | W x L   | LIP SHELVES<br>46-1/2" Overall Height | FLUSH SHELVES<br>45" Overall Height     | Shelf<br>Clearance | Wt. |
|----------------|---------|---------------------------------------|---|--------------------|-----|
| <b>3 Shelf</b> | 24 x 36 | 3ML-2436-6PH                          | 3M-2436-6PH                             | 16-1/2"            | 142 |
|                | 24 x 48 | 3ML-2448-6PH                          | 3M-2448-6PH                             | 16-1/2"            | 173 |
|                | 30 x 48 | 3ML-3048-6PH                          | 3M-3048-6PH                             | 16-1/2"            | 204 |
|                | 30 x 60 | 3ML-3060-6PH                          | 3M-3060-6PH                             | 16-1/2"            | 244 |
|                | W x L   | LIP SHELVES<br>65" Overall Height     | FLUSH SHELVES<br>63-1/2" Overall Height | Shelf<br>Clearance | Wt. |
| <b>4 Shelf</b> | 24 x 36 | 4ML-2436-6PH                          | 4M-2436-6PH                             | 16-1/2"            | 175 |
|                | 24 x 48 | 4ML-2448-6PH                          | 4M-2448-6PH                             | 16-1/2"            | 216 |
|                | 30 x 48 | 4ML-3048-6PH                          | 4M-3048-6PH                             | 16-1/2"            | 256 |
|                | 30 x 60 | 4ML-3060-6PH                          | 4M-3060-6PH                             | 16-1/2"            | 309 |
|                | W x L   | LIP SHELVES<br>65" Overall Height     | FLUSH SHELVES<br>63-1/2" Overall Height | Shelf<br>Clearance | Wt. |
| <b>5 Shelf</b> | 24 x 36 | 5ML-2436-6PH                          | 5M-2436-6PH                             | 12"                | 207 |
|                | 24 x 48 | 5ML-2448-6PH                          | 5M-2448-6PH                             | 12"                | 258 |
|                | 30 x 48 | 5ML-3048-6PH                          | 5M-3048-6PH                             | 12"                | 307 |
|                | 30 x 60 | 5ML-3060-6PH                          | 5M-3060-6PH                             | 12"                | 373 |

For 6" x 2" Polyurethane Casters, use wheel code **-6PY** (3600 lbs. Capacity)  
 For 6" x 2" Mold-on Rubber Casters, use wheel code **-6MR** (2000 lbs. Capacity)



Model  
5M-2448-6PH

## Multi-Shelf Order Picking Truck

### 3600 lbs. Capacity

Larger capacity to pick more orders means fewer trips. All-welded 12 gauge shelves available with retaining lip or flush edges. 12" long writing shelf is 21" wide on 24" wide trucks and 27" wide on 30" wide trucks. Sloped storage pocket measures 14" wide x 12-1/2" long with 4-3/4" access height. 6" x 2" phenolic casters.

|                | W x L   | LIP SHELVES<br>46-1/2" Overall Height | FLUSH SHELVES<br>45" Overall Height     | Shelf<br>Clearance | Wt. |
|----------------|---------|---------------------------------------|---|--------------------|-----|
| <b>3 Shelf</b> | 24 x 36 | 3ML2436-6PH-WSP                       | 3M-2436-6PH-WSP                         | 16-1/2"            | 142 |
|                | 24 x 48 | 3ML2448-6PH-WSP                       | 3M-2448-6PH-WSP                         | 16-1/2"            | 173 |
|                | 30 x 48 | 3ML3048-6PH-WSP                       | 3M-3048-6PH-WSP                         | 16-1/2"            | 204 |
|                | 30 x 60 | 3ML3060-6PH-WSP                       | 3M-3060-6PH-WSP                         | 16-1/2"            | 244 |
|                | W x L   | LIP SHELVES<br>65" Overall Height     | FLUSH SHELVES<br>63-1/2" Overall Height | Shelf<br>Clearance | Wt. |
| <b>4 Shelf</b> | 24 x 36 | 4ML2436-6PH-WSP                       | 4M-2436-6PH-WSP                         | 16-1/2"            | 175 |
|                | 24 x 48 | 4ML2448-6PH-WSP                       | 4M-2448-6PH-WSP                         | 16-1/2"            | 216 |
|                | 30 x 48 | 4ML3048-6PH-WSP                       | 4M-3048-6PH-WSP                         | 16-1/2"            | 256 |
|                | 30 x 60 | 4ML3060-6PH-WSP                       | 4M-3060-6PH-WSP                         | 16-1/2"            | 309 |
|                | W x L   | LIP SHELVES<br>65" Overall Height     | FLUSH SHELVES<br>63-1/2" Overall Height | Shelf<br>Clearance | Wt. |
| <b>5 Shelf</b> | 24 x 36 | 5ML2436-6PH-WSP                       | 5M-2436-6PH-WSP                         | 12"                | 207 |
|                | 24 x 48 | 5ML2448-6PH-WSP                       | 5M-2448-6PH-WSP                         | 12"                | 258 |
|                | 30 x 48 | 5ML3048-6PH-WSP                       | 5M-3048-6PH-WSP                         | 12"                | 307 |
|                | 30 x 60 | 5ML3060-6PH-WSP                       | 5M-3060-6PH-WSP                         | 12"                | 373 |

For 6" x 2" Polyurethane Casters, use wheel code: **-6PY** (3600 lbs. Capacity)  
 For 6" x 2" Mold-on Rubber Casters, use wheel code: **-6MR** (2000 lbs. Capacity)



Model  
4ML2448-6PH-WSP



Model  
LGL-2436-WSBRK



Storage Pocket



Storage Drawer

## Order Picking Truck

1200 lbs. Capacity

Convenient 12" long writing shelf for paperwork adds to the versatility of this truck. Bottom shelf has a 1-1/2" retaining lip, and the top shelf is available with a lip, or flush. The 2 swivel and 2 rigid casters feature non-marking 5" diameter polyurethane wheels with ball bearings. Swivel casters have wheel brakes. Top shelf height 35", writing shelf height 39".

| Shelf Size | LIP EDGE SHELVES | FLUSH EDGE TOP | Wt. |
|------------|------------------|----------------|-----|
| 18 x 32    | LGL-1832-WSBRK   | LG-1832-WSBRK  | 80  |
| 24 x 36    | LGL-2436-WSBRK   | LG-2436-WSBRK  | 101 |
| 24 x 48    | LGL-2448-WSBRK   | LG-2448-WSBRK  | 120 |

## Order Picking Truck with Storage Pocket

Sloped storage pocket under writing shelf, measures 14" wide x 12-1/2" long x 4-3/4" access height.

| Shelf Size | LIP EDGE SHELVES | FLUSH EDGE TOP  | Wt. |
|------------|------------------|-----------------|-----|
| 18 x 32    | LGL-1832-WS-P-BK | LG-1832-WS-P-BK | 90  |
| 24 x 36    | LGL-2436-WS-P-BK | LG-2436-WS-P-BK | 111 |
| 24 x 48    | LGL-2448-WS-P-BK | LG-2448-WS-P-BK | 130 |

## Order Picking Truck with Storage Drawer

Accessory drawer with cylinder lock and 2 keys measures 13" wide x 17" deep x 4-1/2" high, offers secure storage.

| Shelf Size | LIP EDGE SHELVES | FLUSH EDGE TOP | Wt. |
|------------|------------------|----------------|-----|
| 24 x 36    | LGL-2436-WSBKDR  | LG-2436-WSBKDR | 116 |
| 24 x 48    | LGL-2448-WSBKDR  | LG-2448-WSBKDR | 145 |



Model  
3LG-2448-WSP-BK

## 3-Shelf Order Picking Truck

1200 lbs. Capacity

Convenience and versatility of our standard order-picking truck, with the added storage of a 3rd shelf. Bottom shelf has a 1-1/2" retaining lip, and the top 2 shelves are available with a lip or flush. The 2 swivel and 2 rigid casters feature non-marking 5" diameter polyurethane wheels with ball-bearings. Swivel casters have wheel brakes. Top shelf height 35". Writing shelf height 39". Clearance between shelves is 12". Also available with storage pocket measuring 14" wide x 12-1/2" long.

| Shelf Size          | LIP EDGE SHELVES | FLUSH TOP (& CENTER) | Wt. |
|---------------------|------------------|----------------------|-----|
| 18 x 32             | 3LGL-1832-WSBRK  | 3LG-1832-WSBRK       | 97  |
| 24 x 36             | 3LGL-2436-WSBRK  | 3LG-2436-WSBRK       | 133 |
| 24 x 48             | 3LGL-2448-WSBRK  | 3LG-2448-WSBRK       | 162 |
| WITH STORAGE POCKET |                  |                      |     |
| 18 x 32             | 3LGL1832-WSP-BK  | 3LG-1832-WSP-BK      | 106 |
| 24 x 36             | 3LGL2436-WSP-BK  | 3LG-2436-WSP-BK      | 142 |
| 24 x 48             | 3LGL2448-WSP-BK  | 3LG-2448-WSP-BK      | 171 |





## Service Cart

800 lbs. Capacity

All-welded construction -14 gauge shelves with 1-1/2" corner angles create a solid and durable service cart. Tubular handle "bolts on". Available in a 2 or 3 shelf configuration. Top (and middle) shelf can be either flush or configured with a 1-1/2" retaining lip. Rides smoothly on 5" x 1-1/4" polyurethane wheels, with 2 rigid and 2 swivel bolted-on casters (hardware included). Uniquely sized to ship "small package" and save on freight cost. 29-1/4" top shelf height. 36" handle height.

|  | Shelf Size | FLUSH TOP (& CENTER) | LIP EDGE SHELVES | Wt. |
|--|------------|----------------------|------------------|-----|
| <b>2 SHELF</b><br>20" Shelf Clearance    | 18 x 32    | LG-1832-UPS          | LGL-1832-UPS     | 51  |
|  | 24 x 36    | LG-2436-UPS          | LGL-2436-UPS     | 65  |
| <b>3 SHELF</b><br>9-1/4" Shelf Clearance | 18 x 32    | 3LG-1832-UPS         | 3LGL-1832-UPS    | 67  |
|  | 24 x 36    | 3LG-2436-UPS         | 3LGL-2436-UPS    | 88  |



Model  
**LGL-2436-UPS**



Model  
**LG-2436-UPS**



Model  
**3LGL-2436-UPS**



Model  
**3LG-2436-UPS**

## Mobile Table

800 lbs. Capacity

All-welded construction in a mobile table that ships "small package" and saves on freight costs. 14 gauge shelves with 1-1/2" corner angles create a solid and durable mobile table. Flush top table measures 29-1/4" from the floor. 5" x 1-1/4" non-marking polyurethane wheels, with 4 swivel bolted-on casters (hardware included) provide smooth rolling performance.

| Size    | Model No.   | Wt. |
|---------|-------------|-----|
| 18 x 32 | IP-1832-UPS | 48  |
| 24 x 36 | IP-2436-UPS | 62  |



Model  
**IP-2436-UPS**



**Model**  
**EA-2436-5PY**

## Easy-Access Shelf Truck

Welded service cart design with no corner upright posts allows easier access to contents on lower shelf. Heavy 12 gauge shelves provide 600 lbs. overall capacity. Two swivel, two rigid casters have non-marking polyurethane wheels with ball bearings for quiet, easy movement over most surfaces, including carpet. Overall height 35" with 26" clearance between shelves.

| Shelf Size | Model No.   | Wt. |
|------------|-------------|-----|
| 18 x 24    | EA-1824-5PY | 56  |
| 18 x 32    | EA-1832-5PY | 63  |
| 24 x 36    | EA-2436-5PY | 85  |



**Model**  
**LGLP-2436-BK**

## Welded Service Cart with Perforated Deck

**1200 lbs. Capacity**

The 12 gauge steel shelves have smooth perforations that allow unwanted debris & moisture to pass through. All-welded service carts feature 1-1/2" retaining lip. Non marking 5" polyurethane casters wheel brakes. Overall height 35", shelf clearance 25". Powder coated gray finish.

| Shelf Size<br>W x L | Model No.    | Wt. |
|---------------------|--------------|-----|
| 24 x 36             | LGLP-2436-BK | 80  |
| 24 x 48             | LGLP-2448-BK | 97  |



**Model**  
**LK-2436-5PYBK**

## Low Deck Truck

**1200 lbs. Capacity**

Low top shelf minimizes bending. Available in either Fixed Height or Adjustable Height. Top shelf is available with a 1-1/2" lip or flush. Bottom shelf has 1-1/2" retaining lip. Rolls easily on 5" non-marking polyurethane casters, 2 swivel with wheel brakes and 2 rigid.



**Model**  
**LK2436-5PYBKAH**

| FIXED HEIGHT                                       |                 |                |     |
|--|-----------------|----------------|-----|
| Top Deck 24" High, 14" Shelf Clearance             |                 |                |     |
| Shelf Size   | Lip Shelves     | Flush Top      | Wt. |
| 18 x 24  | LKL-1824-5PYBK  | LK-1824-5PYBK  | 53  |
| 18 x 32  | LKL-1832-5PYBK  | LK-1832-5PYBK  | 62  |
| 24 x 36  | LKL-2436-5PYBK  | LK-2436-5PYBK  | 82  |
| 24 x 48  | LKL-2448-5PYBK  | LK-2448-5PYBK  | 101 |
| 30 x 48  | LKL-3048-5PYBK  | LK-3048-5PYBK  | 132 |
| 30 x 60  | LKL-3060-5PYBK  | LK-3060-5PYBK  | 161 |
| ADJUSTABLE HEIGHT                                  |                 |                |     |
| Top Deck 25" - 33" High, 15" - 23" Shelf Clearance |                 |                |     |
| Shelf Size   | Lip Shelves     | Flush Top      | Wt. |
| 18 x 32  | LKL1832-5PYBKAH | LK1832-5PYBKAH | 69  |
| 24 x 36  | LKL2436-5PYBKAH | LK2436-5PYBKAH | 89  |
| 24 x 48  | LKL2448-5PYBKAH | LK2448-5PYBKAH | 108 |
| 30 x 48  | LKL3048-5PYBKAH | LK3048-5PYBKAH | 139 |
| 30 x 60  | LKL3060-5PYBKAH | LK3060-5PYBKAH | 168 |



## “Combo Cart” Combination Shelf and Platform Truck

1200 lbs. Capacity

This unique cart combines the storage capacity of multiple shelves with the utility of an open deck platform truck. All-welded construction with 12 gauge steel deck and shelves for optimum strength. Clearance between shelves is 12”, overall height is 36”. 2 swivel and 2 rigid 5” x 1-1/4” polyurethane casters with wheel brakes. Durable powder coated finish.

| Platform Size<br>W x L | Shelf Size<br>W x L | Model No.     | Wt. |
|------------------------|---------------------|---------------|-----|
| 24 x 48                | 24 x 22-1/2         | CC-2448-5PYBK | 84  |
| 30 x 60                | 30 x 26-1/2         | CC-3060-5PYBK | 157 |



Model  
CC-2448-5PYBK

## Platform Truck with Perforated Deck

Smooth 12 gauge perforated deck allows unwanted debris and moisture to pass through. Available with 1-1/2” lip, or flush edges. Removable pushbar handle with 2 swivel, 2 rigid casters. All-welded construction, ships fully assembled. Durable powder coated finish.

| Deck<br>W x L   | Flush Edge     | Lip Edge       | Wt. |
|---|----------------|----------------|-----|
| <b>1200 lbs. Capacity, 5” x 1-1/4” Polyurethane casters</b> |                |                |     |
| 24 x 36   | T-710-P-1H-UPS | T-710-P-LU-UPS | 44  |
| 24 x 48   | T-720-P-1H-UPS | T-720-P-LU-UPS | 50  |
| <b>1600 lbs. Capacity, 6” x 2” Mold-On Rubber Casters</b>   |                |                |     |
| 24 x 36   | T-510-P-1H     | T-510-P-LU     | 44  |
| 24 x 48   | T-520-P-1H     | T-520-P-LU     | 50  |



Model  
T-720-P-LU-UPS

Model  
T-520-P-1H

## 3-inch Lip Edge Platform Truck

The formed steel 12 gauge deck has 3” high lips for better load retention. All-welded construction (except casters), and ready for immediate use. Removable pushbar handle with 2 swivel and 2 rigid casters. Durable powder coated finish.

| CASTER SELECTION |  |     |  |     |
|------------------|--|-----|--|-----|
|                  | 6” x 2” MOLD-ON RUBBER<br>2000 lbs. Capacity |     | 6” x 2” POLYURETHANE<br>3600 lbs. Capacity |     |
| Deck Size        | Model No.                                    | Wt. | Model No.                                  | Wt. |
| 24 x 36          | NBX3-2436-6MR                                | 91  | NBX3-2436-6PY                              | 83  |
| 24 x 48          | NBX3-2448-6MR                                | 103 | NBX3-2448-6PY                              | 95  |
| 30 x 60          | NBX3-3060-6MR                                | 135 | NBX3-3060-6PY                              | 127 |



Model  
NBX3-2448-6PY





*Model*  
**RNB2-2448-6MRAH**

## Work-Height Platform Truck with Lower Shelf

**2000 lbs. Capacity**

12 gauge steel top deck is raised to a comfortable work height to minimize bending and lifting thus reducing back strain. Lower deck is 12 gauge with 1-1/2" retaining lip and provides secure storage when traveling. Fixed height models have a top deck height of 26". Adjustable height versions adjust from 25-1/2" to 35-1/2". Pushbar handle is located 14" above deck. 2 rigid, 2 swivel casters with long lasting 6" mold-on rubber wheels. All welded construction with durable gray powder coat.

### Steel Deck

Smooth 12 gauge steel with powder coated finish.

| Top Deck Size | Lower Deck Size | Fixed Height Model No. | Wt. | Adjustable Height Model No. | Wt. |
|---------------|-----------------|------------------------|-----|-----------------------------|-----|
| 24 x 48       | 24 x 36         | RNB2-2448-6MR          | 140 | RNB2-2448-6MRAH             | 150 |
| 24 x 60       | 24 x 48         | RNB2-2460-6MR          | 163 | RNB2-2460-6MRAH             | 172 |
| 30 x 48       | 30 x 36         | RNB2-3048-6MR          | 163 | RNB2-3048-6MRAH             | 172 |
| 30 x 60       | 30 x 48         | RNB2-3060-6MR          | 187 | RNB2-3060-6MRAH             | 197 |

For 6" Polyurethane Wheels, use wheel code: **-6PY**

Floor lock option available, add: **-FL**



*Model*  
**RNH2-2448-6MR**

### Hardboard over Steel Deck

1/4" Hardboard surface over 12 gauge steel.

| Top Deck Size | Lower Deck Size | Fixed Height Model No. | Wt. | Adjustable Height Model No. | Wt. |
|---------------|-----------------|------------------------|-----|-----------------------------|-----|
| 24 x 48       | 24 x 36         | RNH2-2448-6MR          | 148 | RNH2-2448-6MRAH             | 158 |
| 24 x 60       | 24 x 48         | RNH2-2460-6MR          | 173 | RNH2-2460-6MRAH             | 182 |
| 30 x 48       | 30 x 36         | RNH2-3048-6MR          | 173 | RNH2-3048-6MRAH             | 182 |
| 30 x 60       | 30 x 48         | RNH2-3060-6MR          | 200 | RNH2-3060-6MRAH             | 210 |

For 6" Polyurethane Wheels, use wheel code: **-6PY**

Floor lock option available, add: **-FL**



*Model*  
**RNL2-2448-6MR**

### Lip Edge Deck

12 gauge powder coated steel with 1-1/2" lip edge.

| Top Deck Size | Lower Deck Size | Fixed Height Model No. | Wt. | Adjustable Height Model No. | Wt. |
|---------------|-----------------|------------------------|-----|-----------------------------|-----|
| 24 x 48       | 24 x 36         | RNL2-2448-6MR          | 140 | RNL2-2448-6MRAH             | 150 |
| 24 x 60       | 24 x 48         | RNL2-2460-6MR          | 163 | RNL2-2460-6MRAH             | 172 |
| 30 x 48       | 30 x 36         | RNL2-3048-6MR          | 163 | RNL2-3048-6MRAH             | 172 |
| 30 x 60       | 30 x 48         | RNL2-3060-6MR          | 187 | RNL2-3060-6MRAH             | 197 |

For 6" Polyurethane Wheels, use wheel code: **-6PY**

Floor lock option available, add: **-FL**



## Work-Height Platform Truck with Open Base

2000 lbs. Capacity

Comfortable 12 gauge raised deck reduces bending and back strain. Removable pushbar handle extends 14" above the deck. Open base reduces weight and prevents accumulation of unnecessary materials. All-welded steel construction with durable powder coated finish ships fully assembled. 6" x 2" mold-on rubber casters, 2 swivel, 2 rigid.

### Steel Deck

Smooth 12 gauge steel with powder coated finish.

|           | Fixed Deck Height 26" |     | Adjustable Height 24"-34" |     |
|-----------|-----------------------|-----|---------------------------|-----|
| Deck Size | Model No.             | Wt. | Model No.                 | Wt. |
| 24 x 48   | RNB-2448-6MR          | 116 | RNB-2448-6MR-AH           | 123 |
| 24 x 60   | RNB-2460-6MR          | 131 | RNB-2460-6MR-AH           | 138 |
| 30 x 48   | RNB-3048-6MR          | 131 | RNB-3048-6MR-AH           | 138 |
| 30 x 60   | RNB-3060-6MR          | 146 | RNB-3060-6MR-AH           | 153 |

For 6" Polyurethane Wheels, use wheel code: **-6PY**  
 Floor lock option available, add: **-FL**



Model  
RNB-2448-6MR

### Hardboard over Steel Deck

1/4" Hardboard surface over 12 gauge steel.

|           | Fixed Deck Height 26" |     | Adjustable Height 24"-34" |     |
|-----------|-----------------------|-----|---------------------------|-----|
| Deck Size | Model No.             | Wt. | Model No.                 | Wt. |
| 24 x 48   | RNH-2448-6MR          | 123 | RNH-2448-6MR-AH           | 130 |
| 24 x 60   | RNH-2460-6MR          | 141 | RNH-2460-6MR-AH           | 148 |
| 30 x 48   | RNH-3048-6MR          | 141 | RNH-3048-6MR-AH           | 148 |
| 30 x 60   | RNH-3060-6MR          | 159 | RNH-3060-6MR-AH           | 166 |

For 6" Polyurethane Wheels, use wheel code: **-6PY**  
 Floor lock option available, add: **-FL**



Model  
RNH-2448-6MR-AH

### Lip Edge Deck

12 gauge powder coated steel with 1-1/2" lip edge.

|           | Fixed Deck Height 26" |     | Adjustable Height 24"-34" |     |
|-----------|-----------------------|-----|---------------------------|-----|
| Deck Size | Model No.             | Wt. | Model No.                 | Wt. |
| 24 x 48   | RNL-2448-6MR          | 116 | RNL-2448-6MR-AH           | 123 |
| 24 x 60   | RNL-2460-6MR          | 131 | RNL-2460-6MR-AH           | 138 |
| 30 x 48   | RNL-3048-6MR          | 131 | RNL-3048-6MR-AH           | 138 |
| 30 x 60   | RNL-3060-6MR          | 146 | RNL-3060-6MR-AH           | 153 |

For 6" Polyurethane Wheels, use wheel code: **-6PY**  
 Floor lock option available, add: **-FL**



Floor Lock Option available on fixed height models, add **-FL**



Model  
RNL-2448-6MR



## Steel Deck Platform Trucks

1200 lbs. and 1600 lbs. Capacity

Fully assembled and ready for use, these all-welded steel platform trucks are built for long, trouble-free service in medium duty applications. Removable cross-brace handle extends 28" high above the reinforced formed steel deck. Available with either 6" mold-on rubber or 5" non-marking polyurethane casters.



Model  
T700-1H



Model  
T520-1H



Model  
T700-LU



Model  
T720-DIA-1H

|           | 6" x 2" MOLD-ON RUBBER<br>1600 lbs. Capacity |     | 5" POLYURETHANE<br>1200 lbs. Capacity |     |
|-----------|--|-----|---------------------------------------|-----|
| Deck Size | Model No.                                    | Wt. | Model No.                             | Wt. |
| 18 x 32   | T500-1H                                      | 61  | T700-1H                               | 39  |
| 24 x 36   | T510-1H                                      | 71  | T710-1H                               | 48  |
| 24 x 48   | T520-1H                                      | 80  | T720-1H                               | 56  |
| 24 x 60   | T530-1H                                      | 88  | T730-1H                               | 63  |

## Platform Trucks with Lip Edge

Formed steel deck has 1-1/2" lip to help retain small parts. Removable cross-brace handle. Available with either 6" mold-on rubber or 5" non-marking polyurethane casters.

|           | 6" x 2" MOLD-ON RUBBER<br>1600 lbs. Capacity |     | 5" POLYURETHANE<br>1200 lbs. Capacity |     |
|-----------|--|-----|---------------------------------------|-----|
| Deck Size | Model No.                                    | Wt. | Model No.                             | Wt. |
| 18 x 32   | T500-LU                                      | 61  | T700-LU                               | 39  |
| 24 x 36   | T510-LU                                      | 71  | T710-LU                               | 48  |
| 24 x 48   | T520-LU                                      | 80  | T720-LU                               | 56  |
| 24 x 60   | T530-LU                                      | 88  | T730-LU                               | 63  |

## Quick-Turn Platform Trucks

Diamond caster pattern with center-mounted rigid casters allows for tighter turning radius and added maneuverability. Welded steel deck with removable handle. Available with either 6" mold-on rubber or 5" non-marking polyurethane casters.

|           | 6" x 2" MOLD-ON RUBBER<br>1600 lbs. Capacity |     | 5" POLYURETHANE<br>1000 lbs. Capacity |     |
|-----------|--|-----|---------------------------------------|-----|
| Deck Size | Model No.                                    | Wt. | Model No.                             | Wt. |
| 24 x 36   | T510-DIA-1H                                  | 71  | T710-DIA-1H                           | 48  |
| 24 x 48   | T520-DIA-1H                                  | 80  | T720-DIA-1H                           | 56  |
| 24 x 60   | T530-DIA-1H                                  | 88  | T730-DIA-1H                           | 63  |





## Heavy-Duty Platform Trucks

Capacities to 3600 lbs.

Sturdy all-welded unit is constructed of a formed 12 gauge steel deck with extra reinforcement on underside. Removable pipe handle is 1-5/16" OD and has two cross braces. Two swivel and two rigid casters with choice of wheels. Durable powder coated finish. Ships fully assembled and ready for use.



Floor Lock Option



Rolling Corner Bumper



Model  
NBB-2448-8PYBK

| CASTER SELECTION |  |     |  |     |   |     |  |     |
|------------------|--|-----|--|-----|---|-----|--|-----|
| Deck Size        | 6" x 2" MOLD-ON RUBBER<br>2000 lbs. Capacity |     | 8" x 2" MOLD-ON RUBBER<br>2400 lbs. Capacity |     | 8" x 2" POLYURETHANE<br>NON-MARKING TREAD<br>with Wheel Brakes*<br>3600 lbs. Capacity |     | 8" x 2" POLYURETHANE<br>with Wheel Brakes*<br>& Rolling Corner Bumpers<br>3600 lbs. Capacity |     |
|                  | Model No.                                    | Wt. | Model No.                                    | Wt. | Model No.   | Wt. | Model No.  | Wt. |
| 24 x 36          | ◆ NBB-2436-6MR                               | 84  | ◆ NBB-2436-8MR                               | 88  | ◆ NBB-2436-8PYBK  | 79  | NCB-2436-8PYBK   | 80  |
| 24 x 48          | ◆ NBB-2448-6MR                               | 95  | ◆ NBB-2448-8MR                               | 99  | ◆ NBB-2448-8PYBK  | 90  | NCB-2448-8PYBK   | 91  |
| 24 x 60          | NBB-2460-6MR                                 | 115 | NBB-2460-8MR                                 | 119 | NBB-2460-8PYBK  | 110 | NCB-2460-8PYBK   | 111 |
| 30 x 48          | ◆ NBB-3048-6MR                               | 115 | ◆ NBB-3048-8MR                               | 119 | ◆ NBB-3048-8PYBK  | 110 | NCB-3048-8PYBK   | 111 |
| 30 x 60          | ◆ NBB-3060-6MR                               | 127 | ◆ NBB-3060-8MR                               | 131 | ◆ NBB-3060-8PYBK  | 125 | NCB-3060-8PYBK   | 126 |
| 30 x 72          | NBB-3072-6MR                                 | 140 | NBB-3072-8MR                                 | 144 | NBB-3072-8PYBK  | 135 | NCB-3072-8PYBK   | 136 |
| 36 x 60          | NBB-3660-6MR                                 | 141 | NBB-3660-8MR                                 | 145 | NBB-3660-8PYBK  | 136 | NCB-3660-8PYBK   | 137 |
| 36 x 72          | ◆ NBB-3672-6MR                               | 157 | ◆ NBB-3672-8MR                               | 161 | ◆ NBB-3672-8PYBK  | 152 | NCB-3672-8PYBK   | 153 |

OPTIONS: Floor Lock **-FL**, Wheel Brakes **-BK**  
Extra handles, fixed handle, pipe stakes, and other superstructures also available.

\* Note: Wheel brakes are not intended to stop moving equipment, or for use on ramps or inclines.

## Heavy-Duty Platform Trucks


Capacities to 5000 lbs.

Trucks are formed into a solid unit with a 12 gauge steel deck welded to a structural steel frame. Sturdy removable pipe handle extends 29" above deck. Axle mounted load wheels are 12" x 2-1/2", swivel caster wheels are 8" x 2". Deck height 16-1/2".

| CASTER SELECTION |   |     |   |     |                                       |     |
|------------------|---|-----|---|-----|---------------------------------------|-----|
| Deck Size        | RUBBER TIRED WHEELS<br>3000 lbs. Capacity |     | POLYURETHANE WHEELS<br>4000 lbs. Capacity |     | PHENOLIC WHEELS<br>5000 lbs. Capacity |     |
|                  | Model No.                                 | Wt. | Model No.                                 | Wt. | Model No.                             | Wt. |
| 24 x 48          | NBH-2448-MR                               | 161 | NBH-2448-PU                               | 177 | NBH-2448-PH                           | 163 |
| 30 x 48          | NBH-3048-MR                               | 170 | NBH-3048-PU                               | 186 | NBH-3048-PH                           | 172 |
| 30 x 60          | NBH-3060-MR                               | 181 | NBH-3060-PU                               | 197 | NBH-3060-PH                           | 188 |
| 30 x 72          | NBH-3072-MR                               | 190 | NBH-3072-PU                               | 207 | NBH-3072-PH                           | 192 |
| 36 x 60          | NBH-3660-MR                               | 192 | NBH-3660-PU                               | 208 | NBH-3660-PH                           | 194 |
| 36 x 72          | NBH-3672-MR                               | 205 | NBH-3672-PU                               | 221 | NBH-3672-PH                           | 207 |



Model  
NBH-2448-PU

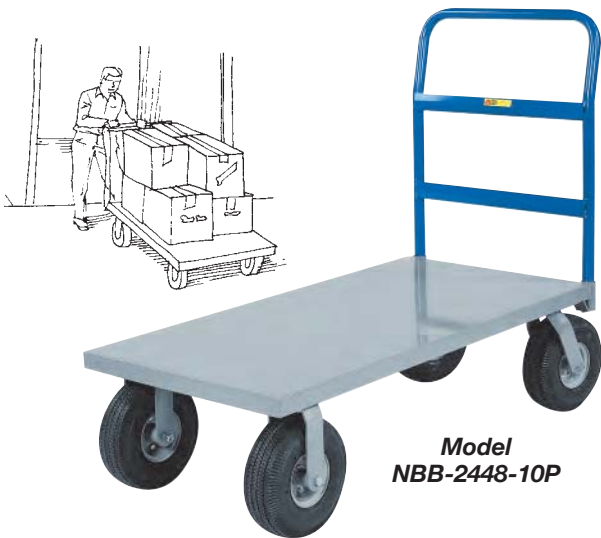

Model  
NBB-2448-10P

## Cushion-Load Platform Trucks with Pneumatic Tires

Ideal for use over rough and uneven floor surfaces. 4-ply full pneumatic wheels absorb shock and reduce vibration. Inflation pressure of tires can be adjusted to provide desired level of cushion. Removable crossbar handle and 2 rigid, 2 swivel casters.

|           | 9" x 3" PNEUMATIC<br>1200 lbs. Capacity |     | 10" x 3.50" PNEUMATIC<br>1500 lbs. Capacity |     |
|-----------|---|-----|---|-----|
| Deck Size | Model No.                               | Wt. | Model No.                                   | Wt. |
| 24 x 36   | ◆ NBB-2436-9P                           | 90  | ◆ NBB-2436-10P                              | 98  |
| 24 x 48   | ◆ NBB-2448-9P                           | 104 | ◆ NBB-2448-10P                              | 112 |
| 24 x 60   | NBB-2460-9P                             | 113 | NBB-2460-10P                                | 121 |
| 30 x 48   | ◆ NBB-3048-9P                           | 113 | ◆ NBB-3048-10P                              | 121 |
| 30 x 60   | ◆ NBB-3060-9P                           | 131 | ◆ NBB-3060-10P                              | 139 |
| 30 x 72   | NBB-3072-9P                             | 145 | NBB-3072-10P                                | 150 |
| 36 x 72   | ◆ NBB-3672-9P                           | 150 | ◆ NBB-3672-10P                              | 159 |

For Floor Lock, add: -FL



Model  
NBB-2448-10SR

## Cushion-Load Platform Trucks with Puncture-Proof Tires

These trucks feature soft, solid rubber tires that can't go flat. Well suited for use over rough surfaces, yet easier to move under heavier loads than pneumatic tired trucks. They also require less maintenance than pneumatic tires. Removable crossbar handle and 2 rigid, 2 swivel casters.

|           | 10" x 2.75" RUBBER<br>1500 lbs. Capacity |     |
|-----------|--|-----|
| Deck Size | Model No.                                | Wt. |
| 24 x 36   | ◆ NBB-2436-10SR                          | 104 |
| 24 x 48   | ◆ NBB-2448-10SR                          | 118 |
| 24 x 60   | NBB-2460-10SR                            | 127 |
| 30 x 48   | ◆ NBB-3048-10SR                          | 127 |
| 30 x 60   | ◆ NBB-3060-10SR                          | 145 |
| 30 x 72   | NBB-3072-10SR                            | 157 |
| 36 x 72   | ◆ NBB-3672-10SR                          | 165 |

For Floor Lock, add: -FL



Model  
BB3060B

## High-Deck Cushion Load Platform Trucks

Built for heavier service and larger loads, these pneumatic tired steel platform trucks feature axle mounted load wheels with 1" roller bearings, and heavy service swivel caster brackets. Larger wheels increase mobility over the roughest terrain. High platform minimizes bending when loading.

|           | 1750 lbs. CAPACITY                             |     | 2500 lbs. CAPACITY                             |     |
|-----------|--|-----|--|-----|
|           | Deck Height 19"                                |     | Deck Height 21"                                |     |
|           | Load Wheels 12" dia.<br>Caster Wheels 10" dia. |     | Load Wheels 16" dia.<br>Caster Wheels 12" dia. |     |
| Deck Size | Model No.                                      | Wt. | Model No.                                      | Wt. |
| 24 x 48   | B2448B   | 155 | BB2448B  | 160 |
| 30 x 48   | B3048B   | 170 | BB3048B  | 180 |
| 30 x 60   | B3060B   | 185 | BB3060B  | 200 |
| 36 x 60   | B3660B   | 200 | BB3660B  | 210 |
| 36 x 72   | B3672B   | 210 | BB3672B  | 230 |



## High-End Platform Truck

*With Non-Marking Polyurethane Wheels*  
**2000 lbs. Capacity**

Narrow 16-inch wide steel deck is ideal for busy aisles, or 24-inch for more loading capacity. Six wheel design is fully maneuverable with two 8" x 2" rigid center wheels with roller bearings, and four 5-inch corner mounted swivel casters with ball bearing wheels. All wheels are non-marking polyurethane tread for added maneuverability. Two removable pipe handles extend 48" above the deck for taller loads, which means fewer trips.

| Deck Size | Model No. | Wt. |
|-----------|-----------|-----|
| 16 x 48   | HE-1648   | 105 |
| 16 x 60   | HE-1660   | 115 |
| 16 x 72   | HE-1672   | 124 |
| 24 x 48   | HE-2448   | 124 |
| 24 x 60   | HE-2460   | 188 |



**Model  
HE-1648**

## 6-Wheel Platform Trucks

Reinforced 12 gauge steel deck has center mounted rigid casters for a tighter turning radius. Swivel casters under all 4 corners provide greater load support and stability. Removable pipe handle with cross braces extends 29" high above the deck.

| CASTER SELECTION |               |     |  |     |
|------------------|---------------|-----|--|-----|
| Deck Size        | Model No.     | Wt. | 6" x 2" POLYURETHANE<br>3600 lbs. Capacity |     |
|                  |               |     | Model No.                                  | Wt. |
| 24 x 48          | NB6W-2448-6MR | 129 | NB6W-2448-6PY                              | 114 |
| 24 x 60          | NB6W-2460-6MR | 139 | NB6W-2460-6PY                              | 124 |
| 30 x 48          | NB6W-3048-6MR | 145 | NB6W-3048-6PY                              | 130 |
| 30 x 60          | NB6W-3060-6MR | 164 | NB6W-3060-6PY                              | 149 |
| 30 x 72          | NB6W-3072-6MR | 182 | NB6W-3072-6PY                              | 167 |
| 36 x 60          | NB6W-3660-6MR | 177 | NB6W-3660-6PY                              | 162 |
| 36 x 72          | NB6W-3672-6MR | 197 | NB6W-3672-6PY                              | 182 |



**Model  
NB6W-2448-6PY**

## Nesting/Hinged Deck Platform Truck

**2000 lbs. Capacity**

Conserve floor space! These sturdy all-welded platform trucks are designed to nest into one-another when unloaded requiring only 14" of additional floor space per truck. Deck is 12 gauge steel with reinforcement. Removeable pipe handle is 1-5/16" OD with two cross-braces. Two swivel and two rigid casters with 6" mold-on rubber wheels for a soft ride. Powder coated for durability. Ships fully assembled and ready to use.

| Deck Size | Lip Shelves  | Wt. |
|-----------|--------------|-----|
| 30 x 60   | NBN-3060-6MR | 150 |



**Model  
NBN-3060-6MR**



**Model  
DR-3048-6PY**

## Double End Rack Platform Truck

Welded steel construction with 2 removable Lattice-Style End Racks. End Racks extend 36" above the deck. Ideal for bulky packages and roll goods. 12 gauge reinforced steel deck - 9" deck height. Rolls quietly on 2 swivel and 2 rigid casters with non-marking 6" x 2" polyurethane wheels. Sturdy 3600 lbs. capacity.

| Deck Size | Model No.   | Wt. |
|-----------|-------------|-----|
| 24 x 48   | DR-2448-6PY | 108 |
| 24 x 60   | DR-2460-6PY | 121 |
| 30 x 48   | DR-3048-6PY | 123 |
| 30 x 60   | DR-3060-6PY | 138 |
| 30 x 72   | DR-3072-6PY | 153 |



Optional Floor Lock -FL



**Model  
DRB-3048-6PY**

## Double End Rack Platform Truck with Side Rack

**3600 lbs. Capacity**

Heavy-duty platform truck enclosed on three sides with removable side and end racks for the ultimate in configurable load carrying. 12 gauge powder coated steel deck measures 9" from the floor. The two removable end racks measure 36" high from the deck surface. The side rack extends 24" from the deck. Rolls smoothly on 2 swivel and 2 rigid casters with 6" x 2" non-marking polyurethane wheels.

| Deck Size | Model No.    | Wt. |
|-----------|--------------|-----|
| 24 x 48   | DRB-2448-6PY | 126 |
| 24 x 60   | DRB-2460-6PY | 142 |
| 30 x 48   | DRB-3048-6PY | 142 |
| 30 x 60   | DRB-3060-6PY | 159 |



**Model  
NBB-2448-8PY-2H**

## Double Handle Platform Truck

**2000 lbs. to 3600 lbs. Capacity**

Handles at both ends for load retention and versatility. Sturdy all-welded unit is constructed of a formed 12 gauge steel deck with extra reinforcement on the underside. Two removable pipe handles are 1-5/16" O.D. and have two cross-braces. Two swivel and two rigid casters with choice of wheels. Durable powder coated finish. Ships fully assembled and ready for use.

| CASTER SELECTION |  |     |  |     |
|------------------|--|-----|--|-----|
|                  | 6" x 2" MOLD-ON RUBBER<br>2000 lbs. Capacity |     | 8" x 2" POLYURETHANE<br>3600 lbs. Capacity |     |
| Deck Size        | Model No.                                    | Wt. | Model No.                                  | Wt. |
| 24 x 36          | NBB-2436-6MR-2H                              | 98  | NBB-2436-8PY-2H                            | 93  |
| 24 x 48          | NBB-2448-6MR-2H                              | 109 | NBB-2448-8PY-2H                            | 104 |
| 24 x 60          | NBB-2460-6MR-2H                              | 129 | NBB-2460-8PY-2H                            | 124 |
| 30 x 48          | NBB-3048-6MR-2H                              | 130 | NBB-3048-8PY-2H                            | 125 |
| 30 x 60          | NBB-3060-6MR-2H                              | 142 | NBB-3060-8PY-2H                            | 140 |
| 30 x 72          | NBB-3072-6MR-2H                              | 155 | NBB-3072-8PY-2H                            | 150 |
| 36 x 60          | NBB-3660-6MR-2H                              | 157 | NBB-3660-8PY-2H                            | 152 |
| 36 x 72          | NBB-3672-6MR-2H                              | 173 | NBB-3672-8PY-2H                            | 168 |





## Caster Steer Trailers

2000 lbs. Capacity

This versatile unit can be used as an independent platform truck for manual order picking and then quickly connected into a train of trailers. The caster steer design means wheels stay under the load at all times, providing better stability with unevenly distributed loads. The two swivel casters rotate 360°, providing excellent maneuverability even in tight areas.

- Reinforced 12 gauge steel deck is 11-1/2" high
- 8" x 2" mold-on rubber wheels with cast iron centers and roller bearings
- Removable pipe rack/pushbar handle extends 29" above the deck
- Ring drawbar stays in upright position for manual operation as a platform truck
- Pin and clevis coupler at rear



Model  
CS-3060-8MRHD

| Deck Size | Model No.     | Wt. |
|-----------|---------------|-----|
| 30 x 60   | CS-3060-8MRHD | 160 |
| 30 x 72   | CS-3072-8MRHD | 175 |
| 36 x 60   | CS-3660-8MRHD | 178 |
| 36 x 72   | CS-3672-8MRHD | 195 |

### PIN & CLEVIS REAR COUPLER



Wishbone half of coupler stands upright when not in use.



Versatile ring type wishbone coupler with 2-1/2" I.D. ring can also be used with most pintle hitches.

## Three Shelf Caster Steer Trailer

2000 lbs. Capacity

Our caster steel trailer now with 3 shelves for additional storage. 12 gauge shelves with 1-1/2" retaining lip to contain your loads while being transported. Clearance between shelves is 12". Top shelf height is 40". Caster steer design keeps the wheels under the loads. 2 rigid, 2 swivel heavy-duty casters and 8" mold on rubber. Wishbone coupler with 2-1/2" I.D. ring on swivel end remains upright when not in use. Pin & clevis on rigid end.

| Deck Size | Model No.       | Wt. |
|-----------|-----------------|-----|
| 30 x 60   | 3CSL-3060-8MRHD | 314 |
| 30 x 72   | 3CSL-3072-8MRHD | 355 |
| 36 x 60   | 3CSL-3660-8MRHD | 357 |
| 36 x 72   | 3CSL-3672-8MRHD | 402 |



Model  
3CSL-2448-8MRHD



## DOUBLE 5TH WHEEL STEER Tracking Trailer

2000 lbs. Capacity

The pivoting axles of these trailers are connected by a tie rod which turns the front and rear wheels in opposite directions. This design provides agile maneuvering of individual or multiple trailers in narrow aisles and around tight corners. A rear hitch on the four wheel steering trailer allows multiple trailers to track in the path of the lead trailer.

- 12 gauge steel deck with boxed edges has reinforced understructure.
- 16" pneumatic wheels with 1" roller bearings.
- 2-1/2" ID Ring Drawbar with Pin and Clevis Rear Hitch




Model  
CT-3660-16P

| Overall<br>W x L x H | Model No.   | Wt. |
|----------------------|-------------|-----|
| 36 x 60 x 19         | CT-3660-16P | 251 |

- Not intended for speeds above 5 mph.
- Increased trailer loading or trailer quantity decreases braking capability of tow vehicle



Ring Drawbar Hitches  
to Pin and Clevis.

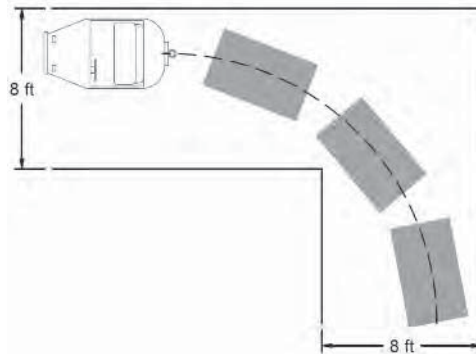

**Minimum  
Aisle Width  
8 feet  
(up to 3 trailers).**

## Custom Designs

Available with special End or Side Racks, Dividers, Shelves, and other custom superstructures to meet your requirements.





## 8-Wheeler Wagon Truck

**3000 lbs. Capacity**

8 wheels distribute the load over greater surface area. 16" x 4" pneumatic wheels are 4 ply with roller bearings and 1 inch axles. 12 gauge steel deck is available with flush edges or a 1-1/2" retaining lip. Ring Drawbar/T-Handle has 2-1/2" I.D. ring allows for intermittent low speed towing.

| Size    | Lip Edge Model No. | Flush Deck Model No. | Wt. |
|---------|--------------------|----------------------|-----|
| 30 x 48 | CD-3048-16P-CR     | CD-3048-16PFD-CR     | 155 |
| 30 x 60 | CD-3060-16P-CR     | CD-3060-16PFD-CR     | 170 |
| 36 x 60 | CD-3660-16P-CR     | CD-3660-16PFD-CR     | 187 |
| 36 x 72 | CD-3672-16P-CR     | CD-3672-16PFD-CR     | 202 |



**Model  
CD-3060-16PFD-CR**

## 2-Wheel Towable Wagon

**1300 lbs. Capacity**

Industrial-duty 12 gauge MIG welded Cargo bed has 10 cubic feet of storage space and is reinforced with square tubing. Rear liftgate is secured with spring-loaded latch pins and drops down for easy unloading. Wagon deck is 10-3/8" above ground. Heavy-duty cushion load 16" pneumatic wheels with roller bearings - easily handles heavy loads up to 1300 lbs. over rough terrain. Pin and clevis style tow-bar hitch. Not intended for speeds above 5 mph. Durable powder coated finish.

| Bed Size | Model No.     | Wt. |
|----------|---------------|-----|
| 27 x 50  | CH2W-2750-16P | 207 |



**Model  
CH2W-2750-16P**

## Caster Steer Wagon

**2000 lbs. Capacity**

Built with a "T"-style pull handle for ergonomics and maneuverability. All-welded unit is constructed of a formed 12 gauge steel deck with 1-1/2" lip and extra reinforcement on the underside. Two swivel and two rigid casters with 8" x 2" mold-on rubber wheels. Handle pivots up and down and has vinyl hand grips. Durable powder coated finish.

| Bed Size | Model No.    | Wt. |
|----------|--------------|-----|
| 24 x 48  | CSW-2448-8MR | 80  |
| 30 x 48  | CSW-3048-8MR | 91  |
| 30 x 60  | CSW-3060-8MR | 111 |
| 30 x 72  | CSW-3072-8MR | 122 |
| 36 x 60  | CSW-3660-8MR | 135 |
| 36 x 72  | CSW-3672-8MR | 136 |



**Model  
CSW-3060-8MR**

**RING DRAWBAR OPTION**

Optional 36" long combination Ring Drawbar/ T-Handle includes 2-1/2" I.D. Eye for intermittent towing at speeds under 5 mph. Capacities reduced by 25% when towing.

Model 004-0184



Model CH-3060-16P

**HEAVY-DUTY Wagon Trucks**

3500 lbs. Capacity

Fifth wheel steering describes a type of steering where the front wheels and axle assembly pivot on a center point, which is referred to as the fifth wheel. Because the steering wheels encounter less friction when turning than would be encountered in a swivel caster, wagon trucks with fifth wheel steering can be easier to maneuver under heavier load conditions. This is especially true when softer, wider pneumatic wheels are required because of use on rough or uneven surfaces. Wagon Trucks with this type of steering are typically pulled, but can also be pushed. T-handle with vinyl handgrips allows two man operation.

- Heavy 12 gauge reinforced steel decks with 1-1/2" retaining lip, or flush edge.
- Full 1-inch diameter axles and roller bearing wheels.
- Structural channel undercarriage for heavier loads and durability.

\* Pan Steel Decks are standard with a 1-1/2" retaining lip. For Flush Steel Deck, add: **-FSD** to model number.



Flush Deck with Mold-On Rubber Wheels

| WHEEL SELECTION |   |     |  |     |  |     |
|-----------------|---|-----|--|-----|--|-----|
|                 | 12" x 2-1/2" Mold-On Rubber<br>3500 lbs. Capacity<br>Deck Height: 16-1/2" |     | 16" x 4" Pneumatic<br>3000 lbs. Capacity<br>Deck Height: 18-1/2" |     | 12" x 3-1/2" Pneumatic<br>2000 lbs. Capacity<br>Deck Height: 16-1/2" |     |
| Size            | Model No.*  | Wt. | Model No.*   | Wt. | Model No.*   | Wt. |
| 24 x 36         | CH-2436-12MR  | 175 | CH-2436-16P  | 123 | CH-2436-12P  | 113 |
| 24 x 48         | CH-2448-12MR  | 185 | CH-2448-16P  | 133 | CH-2448-12P  | 123 |
| 30 x 48         | CH-3048-12MR  | 201 | CH-3048-16P  | 149 | CH-3048-12P  | 140 |
| 30 x 60         | CH-3060-12MR  | 216 | CH-3060-16P  | 165 | CH-3060-12P  | 155 |
| 36 x 60         | CH-3660-12MR  | 224 | CH-3660-16P  | 182 | CH-3660-12P  | 172 |
| 36 x 72         | CH-3672-12MR  | 251 | CH-3672-16P  | 198 | CH-3672-12P  | 187 |

For Flush Steel Deck, add: **-FSD** to model number



Model CH-2448-X6-16P

**HEAVY-DUTY Deep Lip Wagon Trucks**

Additional carrying capacity is provided by the higher lip edge on these heavy-duty 12 gauge steel decks. Available in either a 3" or 6" deep deck, these units are perfect for transporting smaller parts and components.

| WHEEL SELECTION  |   |     |  |     |  |     |
|------------------|---|-----|--|-----|--|-----|
|                  | 12" x 2-1/2" Mold-On Rubber<br>3500 lbs. Capacity |     | 16" x 4" Pneumatic<br>3000 lbs. Capacity |     | 12" x 3-1/2" Pneumatic<br>2000 lbs. Capacity |     |
| Size             | Model No.   | Wt. | Model No.                                | Wt. | Model No.                                    | Wt. |
| 3" LIP EDGE DECK |   |     |  |     |  |     |
| 24 x 48          | CH-2448-X3-12MR                                   | 189 | CH-2448-X3-16P                           | 137 | CH-2448-X3-12P                               | 127 |
| 30 x 60          | CH-3060-X3-12MR                                   | 221 | CH-3060-X3-16P                           | 170 | CH-3060-X3-12P                               | 160 |
| 6" LIP EDGE DECK |   |     |  |     |  |     |
| 24 x 48          | CH-2448-X6-12MR                                   | 205 | CH-2448-X6-16P                           | 153 | CH-2448-X6-12P                               | 143 |
| 30 x 60          | CH-3060-X6-12MR                                   | 241 | CH-3060-X6-16P                           | 190 | CH-3060-X6-12P                               | 180 |





## Wagon Trucks

1200 lbs. Capacity

Fifth wheel steering combined with choice of puncture-proof solid rubber wheels, or cushion load pneumatic wheels make these trucks ideal for maneuvering over rough surfaces. Pull handle has vinyl hand grip. Deck size is 24" wide x 36" long. Available with a flush deck or with a 1-1/2" lip-up. All models ship via UPS. Durable powder coated red finish.

### Steel Deck

Welded 12 gauge steel for maximum durability. Available with 1-1/2" retaining lip, or with flush edges for easier sliding on and off. Ships fully assembled, ready for immediate use.

| Deck   | Model No.       | Capacity (lbs.) | Wheel Type             | Wt. |
|--------|-----------------|-----------------|------------------------|-----|
| Lip-Up | ◆ LW-2436-8S    | 1200            | 8 x 2.50 Solid Rubber  | 70  |
|        | ◆ LW-2436-10    | 1200            | 10 x 2.75 Solid Rubber | 76  |
|        | ◆ LW-2436-10P   | 1200            | 10 x 3.50 Pneumatic    | 67  |
| Flush  | LW-2436-8S-FSD  | 1200            | 8 x 2.50 Solid Rubber  | 70  |
|        | LW-2436-10-FSD  | 1200            | 10 x 2.75 Solid Rubber | 76  |
|        | LW-2436-10P-FSD | 1200            | 10 x 3.50 Pneumatic    | 67  |

### Perforated Steel Deck

Smooth perforated 12 gauge steel deck with 1-1/2" lip allows dirt and moisture to pass through, but has no expanded metal ends to stick up and scratch or puncture load. Ships fully assembled, ready for immediate use.

| W x L Deck | Model No.      | Capacity (lbs.) | Wheel Type             | Wt. |
|------------|----------------|-----------------|------------------------|-----|
| 24 x 36    | ◆ LWP-2436-10  | 1200            | 10 x 2.50 Solid Rubber | 73  |
|            | ◆ LWP-2436-10P | 1200            | 10 x 3.50 Pneumatic    | 63  |

### Steel Deck Trucks with 6" Sides

Provides additional carrying capacity. Solid deck is formed with 6" high sides from a single sheet of 12 gauge steel and welded in place. Easy assembly of wheels and handle to welded unit.

| W x L Deck | Model No.        | Capacity (lbs.) | Wheel Type             | Wt. |
|------------|------------------|-----------------|------------------------|-----|
| 24 x 36    | ◆ LDW2436-X6-10  | 1200            | 10 x 2.75 Solid Rubber | 92  |
|            | ◆ LDW2436-X6-10P | 1200            | 10 x 3.50 Pneumatic    | 83  |

## Nursery Wagon with Perforated Deck

1200 lbs. Capacity

Smooth perforated 12 gauge steel deck with 1-1/2" lip allows debris and moisture to pass through. Deck is stronger and more durable than expanded metal, with no metal ends to stick up and scratch or puncture the load. Powder coated green finish. Ships fully assembled, ready for immediate use.

| W x L Deck | Model No.      | Capacity (lbs.) | Wheel Type             | Wt. |
|------------|----------------|-----------------|------------------------|-----|
| 24 x 36    | LWP-2436-10-G  | 1200            | 10 x 2.75 Solid Rubber | 73  |
|            | LWP-2436-10P-G | 1200            | 10 x 3.50 Pneumatic    | 63  |



Model  
LW-2436-10P



Model  
LW-2436-10-FSD



Model  
LWP-2436-10P



Model  
LDW2436-X6-10



Model  
LWP-2436-10P-G



**Model**  
**2LDWP2436-10P-G**

## 2-Shelf Wagon Truck with Perforated Deck

**1200 lbs. Capacity**

Rugged, all-welded steel construction. Shelves are smooth 12 gauge steel with round perforations - ideal for cleaning and drainage. 5th wheel style steering with ergonomic handle. Choose from 3 wheel types. Perfect for nursery or gardening. Ships fully assembled. Powder coated green finish.

| W x L Deck | Model No.       | Wheel Type            | Wt. |
|------------|-----------------|-----------------------|-----|
| 24 x 36    | 2LDWP2436-8S-G  | 8" Solid Rubber Tire  | 95  |
|            | 2LDWP2436-10-G  | 10" Solid Rubber Tire | 101 |
|            | 2LDWP2436-10P-G | 10" Pneumatic         | 92  |
| 24 x 48    | 2LDWP2448-8S-G  | 8" Solid Rubber Tire  | 111 |
|            | 2LDWP2448-10-G  | 10" Solid Rubber Tire | 117 |
|            | 2LDWP2448-10P-G | 10" Pneumatic         | 108 |



**Model**  
**NP-2448-G**

## Raised Height Nursery Platform Truck

**1200 lbs. Capacity**

Perforated 14 gauge steel deck allows debris and moisture to pass through, but has no expanded metal ends to stick up and scratch or puncture load. Ergonomic deck height is 16" with a 1-1/2" lip-up. Two 12" load wheels and two 10" swivel caster wheels with pneumatic tires can easily transport heavy loads over rough or uneven surfaces. Removable handle that stands 20" above deck, and can be inserted into handle pockets on either end. Overall height 36". Powder coated green finish.

| Deck Size | Model No. | Wt. |
|-----------|-----------|-----|
| 24 x 48   | NP-2448-G | 87  |



**Model**  
**T810P-9PN-G-LU**

## Nursery Platform Truck with Perforated Deck

**1000 lbs. Capacity**

Smooth perforated 12 gauge steel deck allows debris and moisture to pass through, but has no expanded metal ends to stick up and scratch or puncture load. Available with 1-1/2" lip or flush deck. Available with 9" cushion-load pneumatic wheels or 10" solid rubber. Removable handle stands 28" above deck. Overall height 39". Powder coated green finish.

| 9" x 3" PNEUMATIC WHEELS        |                 |     |              |     |
|---------------------------------|-----------------|-----|--------------|-----|
| Deck Size                       | Lip Deck        | Wt. | Flush Deck   | Wt. |
| 24 x 36                         | T810P-9PN-G-LU  | 59  | T810P-9PN-G  | 59  |
| 24 x 48                         | T820P-9PN-G-LU  | 71  | T820P-9PN-G  | 71  |
| 10" x 2.75" SOLID RUBBER WHEELS |                 |     |              |     |
| Deck Size                       | Lip Deck        | Wt. | Flush Deck   | Wt. |
| 24 x 36                         | T810P-10SR-G-LU | 67  | T810P-10SR-G | 67  |
| 24 x 48                         | T820P-10SR-G-LU | 79  | T820P-10SR-G | 79  |



## Two-Shelf Nursery Cart

1200 lbs. Capacity

All-welded construction is lightweight and durable. Smooth, industrial strength 12 gauge perforated steel shelves allow moisture & debris to pass through, clean up easily, and have a 1-1/2" retaining lip. Cushion load Pneumatic tires with 12" load wheels, 9" front swivel casters and extended loop handle for maneuverability Ships fully assembled with durable green powder coated finish. 36" overall height. Capacity 600 lbs. per shelf.

| Deck Size | Model No.  | Wt. |
|-----------|------------|-----|
| 24 x 36   | NP2-2436-G | 100 |
| 24 x 48   | NP2-2448-G | 116 |



Model  
NP2-2448-G

## Service Cart with Perforated Deck

1000 lbs. Capacity

Perforated 12 gauge shelves allow debris and moisture to pass through, but has no expanded metal ends to stick up and scratch or puncture load. Shelves have 1-1/2" retaining lip. 2 swivel and 2 rigid casters with 9" pneumatic wheels for a cushioned ride. Flush handle mounted at swivel end. Shelf clearance is 19". Overall height is 35".

| Deck Size | Model No.      | Wt. |
|-----------|----------------|-----|
| 24 x 36   | LGLP-2436-9P-G | 80  |
| 24 x 48   | LGLP-2448-9P-G | 97  |



Model  
LGLP-2436-9P-G

## Multi-Shelf Nursery Truck

Up to 2000 lbs. Capacity (400 lbs. per shelf)


All-welded construction and powder coated finish - ideal for nursery applications! Heavy-duty 14 gauge steel shelves are perforated for easy cleaning/spraying down. Shelves have 1-1/2" lip all around for retaining objects. Comfortable formed 1" tubular steel push handle Rolls smoothly and quietly on 2 rigid and 2 swivel casters with 6 x 2 mold-on rubber wheels.

|         | Overall W x D x H | Model No.       | Shelf Clearance | Wt. |
|---------|-------------------|-----------------|-----------------|-----|
| 3 Shelf | 24 x 48 x 63      | 3MLP-2448-6MR-G | 24-3/4"         | 141 |
|         | 30 x 60 x 63      | 3MLP-3060-6MR-G | 24-3/4"         | 188 |
| 4 Shelf | 24 x 48 x 63      | 4MLP-2448-6MR-G | 16"             | 170 |
|         | 30 x 60 x 63      | 4MLP-3060-6MR-G | 16"             | 232 |
| 5 Shelf | 24 x 48 x 63      | 5MLP-2448-6MR-G | 11-1/2"         | 194 |
|         | 30 x 60 x 63      | 5MLP-3060-6MR-G | 11-1/2"         | 270 |




Model  
4MLP-2448-6MR-G





Model  
APT-2448-6PY



Shown with Optional  
Pushbar Handle



Shown with Optional  
Pushbar Handle  
(and without  
supplied Uprights)



Shown with Optional  
Lip Attachment

## Adjustable Sheet & Panel Truck

Ideal for large or small quantities of plywood, drywall, or other sheet material. Includes two heavy-duty uprights that extend 27" above the deck and can be placed in any of four positions. Also great for rolled goods, office partition panels, folding tables or use as a standard platform truck. Two rigid and two swivel casters with choice of wheels provide plenty of carrying capacity.

| Wheel type                                       | Deck Size | Model No.    | Capacity  | Wt. |
|--|-----------|--------------|-----------|-----|
| 6" x 2"<br>Non-marking<br>Polyurethane<br>Wheels | 24 x 36   | APT-2436-6PY | 3600 lbs. | 99  |
|  | 24 x 48   | APT-2448-6PY | 3600 lbs. | 117 |
|  | 24 x 60   | APT-2460-6PY | 3600 lbs. | 134 |
|  | 24 x 72   | APT-2472-6PY | 3600 lbs. | 156 |
|  | 30 x 48   | APT-3048-6PY | 3600 lbs. | 132 |
|  | 30 x 60   | APT-3060-6PY | 3600 lbs. | 150 |
|  | 30 x 72   | APT-3072-6PY | 3600 lbs. | 170 |
|  | 36 x 60   | APT-3660-6PY | 3600 lbs. | 165 |
|  | 36 x 72   | APT-3672-6PY | 3600 lbs. | 187 |

For 6" Phenolic Wheels, use wheel code: **-6PH** (3600 lbs. Capacity)  
For 6" Mold-On Rubber, use wheel code: **-6MR** (2000 lbs. Capacity)  
For Wheel Brakes on Swivel Casters, add: **-BK**

### Additional Uprights for added storage and Optional Pushbar Handle

|                     | Model No. | Size W x L         | Wt. |
|---------------------|-----------|--------------------|-----|
| Additional Uprights | 004-0011  | for 36" long decks | 15  |
|                     | 004-0024  | for 48" long decks | 18  |
|                     | 004-0023  | for 60" long decks | 21  |
|                     | 004-0223  | for 72" long decks | 24  |
| Pushbar Handles     | 003-0129  | for 24" wide decks | 13  |
|                     | 003-0131  | for 30" wide decks | 14  |
|                     | 003-0132  | for 36" wide decks | 15  |

**LIP ATTACHMENT**— Optional 1-1/2" lip attachment inserts into deck and allows improved access from side of truck.

| Model No.  | Size               | Wt. |
|------------|--------------------|-----|
| APT-LIP-36 | for 36" long decks | 5   |
| APT-LIP-48 | for 48" long decks | 6   |
| APT-LIP-60 | for 60" long decks | 7   |
| APT-LIP-72 | for 72" long decks | 9   |



Model  
AFTP-2448-6PY

## Adjustable Sheet & Panel Truck with Perforated Deck

2000 lbs. Capacity

Versatile Panel truck is great for moving sheets of plywood, drywall, or any other sheet material. Heavy-duty 12 gauge deck with round perforations. Includes two upright dividers that extend 27" above the deck. Uprights can be placed in 4 positions. Two rigid and two swivel casters with 6" x 2" non-marking polyurethane wheels. Additional uprights, Pushbar Handle, or Lip Attachment are available.

| Deck    | Model No.     | Wt. |
|---------|---------------|-----|
| 24 x 36 | AFTP-2436-6PY | 95  |
| 24 x 48 | AFTP-2448-6PY | 111 |





## 6-Wheel Adjustable Sheet & Panel Truck

**3600 lbs. Capacity**

Perfect for moving plywood, drywall, or any sheet products in tight quarters. Six wheel design ensures high maneuverability and “zero turn” capability. Rolls smoothly on 6” non marking Polyurethane wheels. Includes two heavy-duty uprights that extend 27” above the deck and are adjustable in four positions. Additional uprights are also available.

| Deck Size | Model No.      | Wt. |
|-----------|----------------|-----|
| 24 x 48   | APT6W-2448-6PY | 131 |
| 24 x 60   | APT6W-2460-6PY | 148 |
| 30 x 48   | APT6W-3048-6PY | 146 |
| 30 x 60   | APT6W-3060-6PY | 164 |
| 30 x 72   | APT6W-3072-6PY | 184 |
| 36 x 60   | APT6W-3660-6PY | 179 |
| 36 x 72   | APT6W-3672-6PY | 201 |




**Model  
APT6W-2460-6PY**

## Panel Truck

**1000 lbs. Capacity**

For transporting panels, roll goods and other long items. Three removable uprights extend 27” above the deck. Load space between uprights is 9-1/2”. Swivel casters have 5” non-marking polyurethane wheels. Available with choice of wood or carpet covered wood rails to protect the load.

|               | Model No.      | Size W x L | Wt. |
|---------------|----------------|------------|-----|
| Wood Ends     | ◆ PT-2436-5PY  | 24 x 36    | 78  |
| Carpeted Ends | ◆ PTC-2436-5PY | 24 x 36    | 80  |

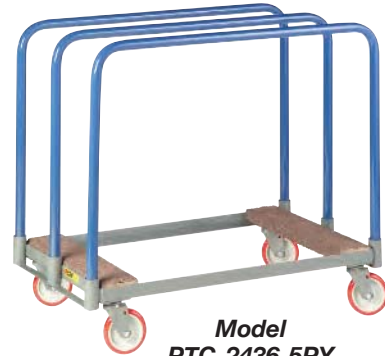

**Model  
PTC-2436-5PY**

## Lumber & Panel Cart

**3600 lbs. Capacity**

Versatile truck transports plywood panels and drywall, as well as lumber, pipe, and other long bulky products. Uprights are 27” and 36” high above the 12 gauge steel deck. Uprights are spaced 6” apart on 24”W deck, 6” and 12” on 30”W deck. Non-marking 6” x 2” polyurethane wheels with 2 rigid and 4 swivel casters. Overall height 45”.

| Deck    | Model No.   | Wt. |
|---------|-------------|-----|
| 24 x 48 | LC-2448-6PY | 99  |
| 30 x 48 | LC-3048-6PY | 109 |



**Model  
LC-2448-6PY**

## Perforated Deck Lumber Cart

**2000 lbs. Capacity**

Four swivel casters with 6” Polyurethane wheels for maneuverability in the tightest spaces. Perforated steel deck prevents accumulation of moisture and debris. Inside rail height 34”, outside rail height 24” above deck. Inside rail spacing 9”, outside rail spacing 5-1/2”. Powder coated gray finish.


| Overall W x L | Model No.      | Wt. |
|---------------|----------------|-----|
| 24 x 36       | LCP-2436-S-6PY | 96  |

**Model  
LCP-2436-S-6PY**





**Model  
AF2448**



**Floor Lock**

## “A” Frame Sheet & Panel Truck

**2000 lbs. Capacity**

Panels can be loaded on both sides, with room between the uprights to transport additional materials. 12 gauge deck has a 1-1/2” retaining lip on each side. Frame is 48” above deck with uprights 12” apart at base. 6” phenolic casters, 2 swivel and 2 rigid, or 4 swivel for maneuverability.

| Size    | 4 Swivel Casters |     | 2 Swivel/2 Rigid Casters |     |
|---------|------------------|-----|--------------------------|-----|
|         | Model No.        | Wt. | Model No.                | Wt. |
| 24 x 36 | AF2436           | 108 | AF2436-2R                | 107 |
| 24 x 48 | AF2448           | 122 | AF2448-2R                | 121 |
| 24 x 60 | AF2460           | 137 | AF2460-2R                | 136 |
| 24 x 72 | AF2472           | 151 | AF2472-2R                | 150 |
| 30 x 48 | AF3048           | 134 | AF3048-2R                | 134 |
| 30 x 60 | AF3060           | 150 | AF3060-2R                | 149 |
| 30 x 72 | AF3072           | 167 | AF3072-2R                | 166 |
| 36 x 72 | AF3672           | 184 | AF3672-2R                | 183 |

Floor Lock: Available on models with 2 rigid casters, add: **-FL**  
For 6” x 2” Polyurethane Casters, use wheel code: **-6PY**



**Model  
DC-2444-8PY**



**Model  
DC-2444-8PY-KD**

## Drywall Cart

**2000 lbs. Capacity**

Steel deck is 12 gauge 14” x 44” and is sloped to help retain the load. Four swivel 8” x 2” casters. Overall 24”W x 44”L x 51”H

| 8” x 2” Polyurethane |     | 8” x 2” Mold-On Rubber |     |
|----------------------|-----|------------------------|-----|
| Model No.            | Wt. | Model No.              | Wt. |
| DC-2444-8PY          | 98  | DC-2444-8MR            | 108 |

## Knock-Down Drywall Cart

Quick and easy pocket mount set-up and knock-down design with angle iron top cross brace.

| 8” x 2” Polyurethane |     | 8” x 2” Mold-On Rubber |     |
|----------------------|-----|------------------------|-----|
| Model No.            | Wt. | Model No.              | Wt. |
| DC-2444-8PY-KD       | 89  | DC-2444-8MR-KD         | 99  |



**Model  
SH-36-4S-5PYTL**




## Sheet Hand Truck

**600 lbs. Capacity**

Move full 4’ x 8’ sheets as a one-man job! Wheel locks prevent the front wheels from rolling or rotating during load/unload. 4” deep nose plate allows for several sheets to be moved at once. 4 swivel casters allow for sideways movement through 36” wide door openings. Waist-high handles allow for comfortable movement and positioning.

- All-welded frame
- 5” x 1-1/4” poly wheels with total locks on front set

| Overall W x D x H | Model No.      | Wt. |
|-------------------|----------------|-----|
| 36 x 34 x 38      | SH-36-4S-5PYTL | 68  |



## Adjustable Sheet & Panel Rack

For stationary storage of panels and sheet material. Smooth 12 gauge steel deck has 4" underclearance. Supplied with 3 upright dividers that extend 27" above the deck. Legs have foot pads with anchor holes.

| Deck Size<br>D x W | Model No. | Wt. |
|--------------------|-----------|-----|
| 30 x 48            | ASR-3048  | 137 |
| 30 x 60            | ASR-3060  | 160 |
| 36 x 60            | ASR-3660  | 176 |

Additional uprights may be ordered separately.

| Model No. | Size W x L         | Wt. |
|-----------|--------------------|-----|
| 004-0024  | for 48" long decks | 18  |
| 004-0023  | for 60" long decks | 21  |



Model  
ASR-3048

## Vertical Sheet Rack

Welded construction with 1-5/16" OD tubular dividers on a base of square tubing and angle iron that includes lag down holes and keeps stored materials up off the floor. Storage bays (4 total) are 7" wide with 1500 lbs. capacity each. Upright dividers are 27", 36", and 42" high. Frame and uprights are all welded and coated in a durable gray powder coat for long lasting performance.

| Overall<br>W x D x H | Model No. | Wt. |
|----------------------|-----------|-----|
| 48 x 36 x 43-1/2     | SR-3648   | 95  |



Model  
SR-3648

## Knock-Down Adjustable Sheet Rack

Upright dividers adjust on 2" increments allowing the user to configure the rack to their individual specifications. Ships knocked down to save on freight.

| Overall<br>W x D x H | Model No.  | Wt. |
|----------------------|------------|-----|
| 48 x 36 x 43-1/2     | SR-3648-KD | 94  |




Model  
SR-3648-KD

## Big Wheel Cradle Truck

Carries a variety of loads, including lumber, tool boxes, and pipe up to 20" diameter. Extra large 16" pneumatic wheels with roller bearings and 4 ply tires roll over the roughest surfaces. Carrier bed is constructed of 3/16" plate and measures 30" long x 12" x 12". Offset "T" handle allows for 2 hand grip and greater control of load.

| Model No. | Capacity  | Wt. |
|-----------|-----------|-----|
| TB-1      | 1000 lbs. | 90  |



Model  
TB-1



**Model**  
**BCT-2860**

## Bar Cradle Truck with Pushbar Handle

**5000 lbs. Capacity**

Heavy-duty all-welded 3" x 1-1/2" channel frame construction. 12" x 2-1/2" phenolic load wheels and 8" x 2" swivel casters with 1/2" tilt. The ergonomic pushbar T-handle is made of 1-1/2" square tubing and can be inserted into pockets in each corner for versatility. Cradle size 24"W x 14"H. Durable powder coated gray finish.

| Overall<br>W x L | Model No. | Wt. |
|------------------|-----------|-----|
| 28 x 60          | BCT-2860  | 213 |



**Model**  
**ERBST-2424-6PH**



## ERGONOMIC Bar Cradle Truck

**3000 lbs. Capacity**

Ergonomic 20" Bed Height - Less bending means easier loading and unloading, and keeps material closer to most machine heights.

Highly Maneuverable - Four swivel casters with 6" hard tread phenolic wheels allow movement in any direction. Useful in tight work areas with long loads and when moving around corners.

3000 lbs. Capacity Each - Use for both transport and storage. Combine multiple units for greater capacity and to support longer loads. Loads on single units must be centered on truck

| Overall<br>W x L x H | Cradle ID<br>W x H | Model No.      | Wt. |
|----------------------|--------------------|----------------|-----|
| 24 x 24 x 34         | 21" x 14"          | ERBST-2424-6PH | 75  |
| 24 x 36 x 34         | 21" x 14"          | ERBST-2436-6PH | 83  |
| 24 x 48 x 34         | 21" x 14"          | ERBST-2448-6PH | 91  |



**Model**  
**ERBST-2448-6PH**

## Adjustable Bar Rack Truck

Double sided A- Frame configuration creates a versatile workhorse for a variety of load requirements. The 9-1/4" high deck surface measures 9" deep x 42" across with 1" retaining lip. Includes 2 pair (4 total) of 1-1/4" OD tubular hooks that are 9" deep and adjustable on 3-1/2" increments. Perfect for carrying tube, bar stock, panels and anything you can think of in this versatile product. All-welded construction with 2 swivel and 2 rigid 6" phenolic wheels.

| W x D x H    | Model No.    | Wt. |
|--------------|--------------|-----|
| 40 x 36 x 67 | ABR-3640-6PH | 119 |



**Model**  
**ABR-3640-6PH**

## Additional 1-1/4 Round Tubing Arm

| Model No. | Wt. |
|-----------|-----|
| AF-ARM    | 3   |





## Portable Bar & Pipe Truck

Rugged, all-welded construction with 3 load levels. Structural channel uprights with 1-1/2" square tube arms have 4-1/2" high stops on ends for load retention. 12 gauge steel lower deck stores and transports smaller part, packages, etc. Platform height 11", overall height 58".

Four swivel casters for maneuverability with 8" x 2" phenolic wheels for ease of movement. Wheel brakes on all four wheels to help prevent unwanted movement.

Capacity 3600 lbs. overall, 2000 lbs. per level evenly distributed. Horizontal storage space (each side): Top = 7-1/2", Middle = 11", Bottom = 15"



**Model  
BRT-3660-8PHBK**

| Model No.      | Deck Size | Overall Length | Wt. |
|----------------|-----------|----------------|-----|
| BRT-3648-8PHBK | 36 x 48   | 48             | 195 |
| BRT-3660-8PHBK | 36 x 60   | 60             | 215 |
| BRT-3672-8PHBK | 36 x 72   | 72             | 236 |

## Vertical Bar Rack

Frees up floor space by storing odd shapes & lengths vertically. Bays are 10-1/2" wide with security chain and hooks. Capacity 1500 lbs. per bay.

| Overall<br>W x D x H | Model No.  | Wt. |
|----------------------|------------|-----|
| 48 x 24 x 60         | BR-2448-60 | 87  |

**Model  
BR-2448-60**



## Vertical Bar Rack

24" D x 36" W 12 gauge steel base. Includes 3 trays - 6", 9-1/2", and 13" deep to hold loose items. Uprights are 1-1/2" angle with an overall height of 84". The three bays are 10" wide and include security chains and hooks. Base has punched holes ready for mounting to the floor. All welded construction, ships fully assembled and ready for use. Durable powder coated gray finish.

| Overall<br>W x D x H | Model No.  | Wt. |
|----------------------|------------|-----|
| 36 x 24 x 84         | BR-2436-84 | 120 |

**Model  
BR-2436-84**





**Model**  
**NBP-2448-8PUBK**



**Model**  
**NBP6W-2448-6PY**



**Model**  
**DT-2448-DIA-4PS**



**Model**  
**OE-2448-6PY**

## Pipe Stake Trucks

Ideal for transporting roll goods and other long, bulky loads. Removable 1-5/16" diameter pipe stakes extend 30" above the reinforced 12 gauge deck. 2 rigid and 2 swivel casters with brakes.

|           | 8" x 2" MOLD-ON RUBBER<br>2400 lbs. Capacity |     | 8" x 2" POLYURETHANE<br>3600 lbs. Capacity |     |
|-----------|--|-----|--|-----|
| Deck Size | Model No.                                    | Wt. | Model No.                                  | Wt. |
| 24 x 36   | NBP-2436-8MRBK                               | 88  | NBP-2436-8PUBK                             | 79  |
| 24 x 48   | NBP-2448-8MRBK                               | 99  | NBP-2448-8PUBK                             | 90  |
| 30 x 48   | NBP-3048-8MRBK                               | 119 | NBP-3048-8PUBK                             | 110 |
| 30 X 60   | NBP-3060-8MRBK                               | 131 | NBP-3060-8PUBK                             | 125 |
| 36 X 72   | NBP-3672-8MRBK                               | 161 | NBP-3672-8PUBK                             | 152 |

## 6-Wheel Pipe Stake Trucks

Two center-mount rigid and four swivel casters for maneuverability and load stability. Deck is 9" high with 1/2" tilt.

|           | 6" X 2" MOLD-ON RUBBER<br>2000 lbs. Capacity |     | 6" x 2" POLYURETHANE<br>3600 lbs. Capacity |     |
|-----------|--|-----|--|-----|
| Deck Size | Model No.                                    | Wt. | Model No.                                  | Wt. |
| 24 x 48   | NBP6W-2448-6MR                               | 131 | NBP6W-2448-6PY                             | 117 |
| 30 x 48   | NBP6W-3048-6MR                               | 147 | NBP6W-3048-6PY                             | 132 |
| 30 X 60   | NBP6W-3060-6MR                               | 166 | NBP6W-3060-6PY                             | 151 |
| 36 X 72   | NBP6W-3672-6MR                               | 197 | NBP6W-3672-6PY                             | 182 |

## Heavy-Duty Pipe Stake Trucks

Center mounted 12" x 2-1/2" load wheels with two 8" x 2" swivel casters arranged in a diamond pattern. Deck is 14" high with 1/2" tilt.

|           | RUBBER TREAD<br>ON STEEL WHEELS<br>3000 lbs. Capacity |     | POLYURETHANE TREAD<br>ON STEEL WHEELS<br>4000 lbs. Capacity |     |
|-----------|---|-----|---|-----|
| Deck Size | Model No.   | Wt. | Model No.   | Wt. |
| 24 x 48   | R-2448-DIA-4PS  | 173 | DT-2448-DIA-4PS   | 190 |
| 30 x 48   | R-3048-DIA-4PS  | 181 | DT-3048-DIA-4PS   | 198 |
| 30 X 60   | R-3060-DIA-4PS  | 192 | DT-3060-DIA-4PS   | 209 |
| 30 X 72   | R-3072-DIA-4PS  | 201 | DT-3072-DIA-4PS   | 219 |
| 36 X 60   | R-3660-DIA-4PS  | 202 | DT-3660-DIA-4PS   | 219 |
| 36 X 72   | R-3672-DIA-4PS  | 215 | DT-3672-DIA-4PS   | 232 |

## Roll Goods Truck

**3600 lbs. Capacity**

Welded uprights on two sides of the 12 gauge steel deck are heavy 1-5/16" O.D. tubing. Uprights extend 48" above the deck, with a welded top cross brace for additional strength and rigidity. 2 swivel and 2 rigid casters with 6" x 2" non-marking polyurethane wheels. Durable powder coated finish.

| Deck    | Model No.   | Wt. |
|---------|-------------|-----|
| 24 x 48 | OE-2448-6PY | 136 |
| 24 x 60 | OE-2460-6PY | 148 |
| 30 x 48 | OE-3048-6PY | 145 |
| 30 x 60 | OE-3060-6PY | 161 |

For Floor Lock add: **-FL**



## Steel Deck Dollies

1000 lbs. Capacity

Ideal for transporting tote boxes, crates, machinery, etc. Formed 12 gauge steel with a 1-1/2" lip up or down. Won't warp or splinter. Four swivel casters with 3" x 1-1/4" hard rubber wheels. Powder coated gray. Available with solid deck, or smooth perforated deck that allows debris and moisture to pass through.

| Deck Style | Size    | Lip Up Model | Wt. | Lip Down Model | Wt. |
|------------|---------|--------------|-----|----------------|-----|
| Solid      | 18 x 24 | MU-1824-3R   | 23  | MD-1824-3R     | 23  |
|            | 18 x 32 | MU-1832-3R   | 28  | MD-1832-3R     | 28  |
|            | 24 x 36 | MU-2436-3R   | 38  | MD-2436-3R     | 38  |
| Perforated | 24 x 36 | MUP-2436-3R  | 34  | MDP-2436-3R    | 34  |



Model  
MD-1832-3R



Model  
MUP-2436-3R

## Heavy-Duty Steel Deck Dolly

1200 lbs. Capacity

Oversized 12 gauge steel deck with four swivel casters with 5" non marking polyurethane wheels. Use for transporting oversized containers or loads. Deck height is 6-3/8" from floor. Available with a flush deck or with a 1-1/2" retaining lip. Durable powder coated gray finish.

| Deck Size | Lip Up Models | Wt. | Lip Down Models | Wt. |
|-----------|---------------|-----|-----------------|-----|
| 24 x 48   | MU-2448-5PY   | 43  | MD-2448-5PY     | 53  |
| 30 x 48   | MU-3048-5PY   | 50  | MD-3048-5PY     | 67  |
| 30 x 60   | MU-3060-5PY   | 59  | MD-3060-5PY     | 80  |



Model  
MD-2448-5PY

## Angle Iron Dollies

1-1/2" x 1-1/2" x 1/8" welded angle iron construction. Available with 1-1/2" lip, or flush edges. Ships fully assembled and ready for use. 3" x 1-1/4" hard rubber swivel casters with 1000 lbs. capacity.

| Size    | Lip Up Models | Lip Down Models | Wt. |
|---------|---------------|-----------------|-----|
| 18 x 24 | ADU-1824-3R   | ADD-1824-3R     | 18  |
| 18 x 32 | ADU-1832-3R   | ADD-1832-3R     | 20  |
| 24 x 36 | ADU-2436-3R   | ADD-2436-3R     | 24  |



Model  
ADU-1832-3R



Model  
ADD-1832-3R



Model  
PDSH-4048-6PH-2FL



Model  
PDS-4048-6PH-2FL

## Solid Deck Pallet Dolly

Pallet sized dollies with a solid deck. Available with optional push handle or T-Handle. Decks are 12 gauge steel. 6" high-capacity phenolic wheels on 4-swivel casters are long lasting and easy rolling on smooth floors. Order with 2 floor locks when you need to keep dolly in place with loading or unloading. Also available with removable pipe handle that extends 29" above the deck.

| SIZE<br>W x L | Model No.         | Wt. | Model No.                 | Wt. |
|---------------|-------------------|-----|---------------------------|-----|
|               | Dolly Only        |     | Dolly With Floor Locks    |     |
| 40 x 48       | PDS-4048-6PH      | 115 | PDS-4048-6PH2FL           | 125 |
| 42 x 48       | PDS-4248-6PH      | 118 | PDS-4248-6PH2FL           | 128 |
| 48 x 48       | PDS-4848-6PH      | 128 | PDS-4848-6PH2FL           | 138 |
| SIZE          | Dolly With Handle |     | With Handle & Floor Locks |     |
|               | Model No.         | Wt. | Model No.                 | Wt. |
| 40 x 48       | PDSH-4048-6PH     | 127 | PDSH4048-6PH2FL           | 137 |
| 42 x 48       | PDSH-4248-6PH     | 130 | PDSH4248-6PH2FL           | 140 |
| 48 x 48       | PDSH-4848-6PH     | 140 | PDSH4848-6PH2FL           | 150 |



Also available with Corner Load Retainers to keep pallet in position; add -LR



Model  
PDST-4048-6PH

## Solid Deck Pallet Dolly with T-Handle

All welded solid deck steel pallet dolly with bolt on T handle for improved maneuverability. Deck height - 9". 2 rigid and 2 swivel casters with 6" phenolic wheels. Available with an optional floor lock. Gray powder coat finish.

| SIZE<br>W x L | Dolly with Pull Handle |     | Dolly with Pull Handle & One Floor Lock |     |
|---------------|------------------------|-----|---|-----|
|               | Model No.              | Wt. | Model No.                               | Wt. |
| 40 x 48       | PDST-4048-6PH          | 121 | PDST-4048-6PHFL                         | 126 |
| 42 x 48       | PDST-4248-6PH          | 124 | PDST-4248-6PHFL                         | 129 |
| 48 x 48       | PDST-4848-6PH          | 134 | PDST-4848-6PHFL                         | 139 |



Model  
PDCS-48-8MR


## Towable Solid Deck Pallet Dollies

**2400 lbs. Capacity**

All-welded solid 12 gauge Pallet Dolly with pin and clevis rear coupler features 1" load retainers on all four corners to keep the pallet in place during transport. The versatile ring type wishbone coupler with 2-1/2" I.D. ring can also be used with most pintle hitches. 2 swivel, 2 rigid 8" mold-on rubber wheels. Caster steer design keeps the wheels under the load for better stability. The reinforced steel deck is 11" high Durable powder coated gray finish.

| Deck Size | Model No.   | Wt. |
|-----------|-------------|-----|
| 40 x 48   | PDCS-40-8MR | 127 |
| 42 x 48   | PDCS-42-8MR | 130 |
| 48 x 48   | PDCS-48-8MR | 140 |





## Pallet Dollies

Convenient, easy-rolling maneuverability for pallets and crates. Four swivel casters with 6" x 2" phenolic wheels and 3600 lbs. capacity. Welded steel construction with durable powder coat finish ships fully assembled. Deck height is 9". Available with double Floor Locks to prevent unwanted movement. Also available with removable pipe handle that extends 29" above the deck.

| SIZE<br>W x L | Model No.         |    | Model No.                 |    | Wt. |
|---------------|-------------------|----|---------------------------|----|-----|
|               | Dolly Only        |    | Dolly With Floor Locks    |    |     |
| 40 x 48       | PD-4048-6PH       | 75 | PD-4048-6PH2FL            | 85 |     |
| 42 x 48       | PD-4248-6PH       | 76 | PD-4248-6PH2FL            | 86 |     |
| 48 x 48       | PD-4848-6PH       | 77 | PD-4848-6PH2FL            | 87 |     |
| SIZE          | Dolly With Handle |    | With Handle & Floor Locks |    |     |
| 40 x 48       | PDH-4048-6PH      | 87 | PDH-4048-6PH2FL           | 97 |     |
| 42 x 48       | PDH-4248-6PH      | 88 | PDH-4248-6PH2FL           | 98 |     |
| 48 x 48       | PDH-4848-6PH      | 89 | PDH-4848-6PH2FL           | 99 |     |



Model  
PDH-4048-6PH-2FL



Model  
PD-4048-6PH

Also available with  
Corner Retainers to  
keep pallet in position.



## Pallet Dolly with T-Handle

All-welded pallet dolly with "T-handle" for easy pulling of loaded dolly. Includes 2 vinyl handgrips for comfortable grip. 2 swivel, 2 rigid 6" x 2" phenolic casters. 3600 lbs. capacity.

| SIZE<br>W x L | Dolly with<br>Pull Handle |     | Dolly with Pull Handle<br>& One Floor Lock |     | Wt. |
|---------------|---------------------------|-----|--|-----|-----|
|               | Model No.                 | Wt. | Model No.                                  | Wt. |     |
| 40 x 48       | PDT-4048-6PH              | 81  | PDT-4048-6PHFL                             | 86  |     |
| 42 x 48       | PDT-4248-6PH              | 82  | PDT-4248-6PHFL                             | 87  |     |
| 48 x 48       | PDT-4848-6PH              | 83  | PDT-4848-6PHFL                             | 88  |     |



Model  
PDT-4048-6PH

## Pallet Dolly with Fork Pockets

This all-welded 12 gauge solid deck pallet dolly features 2 full length fork pockets with 6" wide fork openings on 24" centers. Deck is 14-1/4" high. 4 swivel 6" Phenolic casters with 2 floor locks to keep your load stationary while loading and unloading. All-welded steel construction. Durable powder coated gray finish. 3600 lbs. capacity.

| Deck Size | Without<br>Floor Locks |     | With<br>Floor Locks |     | Wt. |
|-----------|------------------------|-----|---------------------|-----|-----|
|           | Model No.              | Wt. | Model No.           | Wt. |     |
| 40 x 48   | PDS-40-6PHFP           | 110 | PDS-40-6PHFP2FL     | 120 |     |
| 42 x 48   | PDS-42-6PHFP           | 113 | PDS-42-6PHFP2FL     | 123 |     |
| 48 x 48   | PDS-48-6PHFP           | 133 | PDS-48-6PHFP2FL     | 143 |     |



Model  
PDS-40-6PHFP2FL





Model  
PDE-4848-6PH2FL

## Ergonomic Adjustable Height Mobile Pallet Stand

3600 lbs. Capacity

Skid-sized deck is raised to a comfortable work height to lessen bending and back strain. Platform height is adjustable between 24" and 34" in 2" increments to optimize ergonomic height for bending and lifting. Rolls smoothly on 6" swivel casters with phenolic wheels. Dual floor locks keep unit in place when loading and unloading. Available with a 12 gauge solid or open deck. All-welded steel construction. Powder-coated for durability. Ships fully assembled.

| SIZE<br>W x L | SOLID DECK      |     | OPEN DECK       |     |
|---------------|-----------------|-----|-----------------|-----|
|               | Model No.       | Wt. | Model No.       | Wt. |
| 40 x 48       | PDSE4048-6PH2FL | 157 | PDE-4048-6PH2FL | 107 |
| 42 x 48       | PDSE4248-6PH2FL | 163 | PDE-4248-6PH2FL | 109 |
| 48 x 48       | PDSE4848-6PH2FL | 173 | PDE-4848-6PH2FL | 114 |



Model  
PDEH48486PH2FL

## Ergonomic Adjustable Height Mobile Pallet Stand with Handle

3600 lbs. Capacity

Move pallets without a forklift! This Ergonomic Pallet Dolly features an adjustable height deck to reduce back strain when bending and lifting and a removable pipe handle that extends 14" above the deck. Height is adjustable in 2" increments from 24" - 34". Rolls smoothly on 6" swivel casters with phenolic wheels. Dual floor locks keep unit in place when loading and unloading. Available with an open deck or solid 12 gauge steel deck. Powder-coated for durability. Ships fully assembled.

| SIZE<br>W x L | SOLID DECK      |     | OPEN DECK      |     |
|---------------|-----------------|-----|----------------|-----|
|               | Model No.       | Wt. | Model No.      | Wt. |
| 40 x 48       | PDSEH40486PH2FL | 169 | PDEH40486PH2FL | 119 |
| 42 x 48       | PDSEH42486PH2FL | 179 | PDEH42486PH2FL | 121 |
| 48 x 48       | PDSEH48486PH2FL | 185 | PDEH48486PH2FL | 126 |



Model  
PDFS4848-6PH2FL

## Fixed Height Mobile Pallet Stand

3600 lbs. Capacity

All-welded pallet dolly with raised 30" deck height to lessen bending and back strain. Available with an open deck or solid 12 gauge steel deck. 6" swivel casters with phenolic wheels and 2 floor locks to stop unwanted movement during loading and unloading. All-welded construction with durable gray powder coated finish.

| SIZE<br>W x L | SOLID DECK      |     | OPEN DECK      |     |
|---------------|-----------------|-----|----------------|-----|
|               | Model No.       | Wt. | Model No.      | Wt. |
| 40 x 48       | PDFS4048-6PH2FL | 152 | PDF4048-6PH2FL | 102 |
| 42 x 48       | PDFS4248-6PH2FL | 158 | PDF4248-6PH2FL | 104 |
| 48 x 48       | PDFS4848-6PH2FL | 168 | PDF4848-6PH2FL | 109 |



## Industrial Strength Hand Trucks

- 8" DEEP x 14" WIDE NOSE PLATE
- 4 CURVED RIBS WITH VERTICAL CENTER STRAP
- HEAVY 1.05" 14 gauge TUBULAR STEEL for added strength to frame and stair glides.
- EXTRA-HIGH 29" STAIR GLIDES provide rigidity and longer frame life.
- ZINC PLATED "D" AXLE IS INTERCHANGEABLE IN TRI-HOLE AXLE BRACKET

### T-132 SERIES

| Model No.    | Wheel Description             | Cap. lbs. | Wt. |
|--------------|-------------------------------|-----------|-----|
| ◆ T-132-8S   | 8" x 2.50" Solid Rubber Tire  | 800       | 33  |
| ◆ T-132-10   | 10" x 2.75" Solid Rubber Tire | 800       | 37  |
| ◆ T-132-10P  | 10" x 3.50" Pneumatic         | 800       | 35  |
| ◆ T-132-10FF | 10" x 3.50" Flat-Free         | 600       | 36  |

### T-320 SERIES

| Model No.    | Wheel Description             | Cap. lbs. | Wt. |
|--------------|-------------------------------|-----------|-----|
| ◆ T-320-8S   | 8" x 2.50" Solid Rubber Tire  | 800       | 33  |
| ◆ T-320-10   | 10" x 2.75" Solid Rubber Tire | 800       | 37  |
| ◆ T-320-10P  | 10" x 3.50" Pneumatic         | 800       | 35  |
| ◆ T-320-10FF | 10" x 3.50" Flat-Free         | 600       | 36  |

### T-182 SERIES

| Model No.    | Wheel Description             | Cap. lbs. | Wt. |
|--------------|-------------------------------|-----------|-----|
| ◆ T-182-8S   | 8" x 2.50" Solid Rubber Tire  | 800       | 37  |
| ◆ T-182-10   | 10" x 2.75" Solid Rubber Tire | 800       | 39  |
| ◆ T-182-10P  | 10" x 3.50" Pneumatic         | 800       | 37  |
| ◆ T-182-10FF | 10" x 3.50" Flat-Free         | 600       | 38  |

### WHEELS



**WHEEL NO. 8S**  
Solid rubber  
SIZE: 8" x 2.5"  
Capacity: 400 lbs.



**WHEEL NO. 10**  
Solid rubber  
SIZE: 10" x 2.75"  
Capacity: 400 lbs.




**WHEEL NO. 10P**  
Full pneumatic,  
4 ply tube type  
SIZE: 10" x 3.5"



**WHEEL NO. 10FF**  
Flat-Free  
Microcellular Foam  
SIZE: 10" x 3.5"

### STEEL HAND TRUCKS WITH MUSCLE



#### INTERCHANGEABLE D-AXLE BRACKET

Special 3-hole axle bracket allows for placement of axle to accommodate different size wheels. D-shaped axle eliminates turning and wear of axle.



**T-320 SERIES**  
Dual Handle, 49" High



**T-132 SERIES**  
Continuous Handle, 47" High



**T-182 SERIES**  
Loop Handle, 49" High





**T-360 SERIES**  
Continuous Handle, 47" High



**T-362 SERIES**  
Dual Handle, 49" High



**T-364 SERIES**  
Loop Handle, 49" High

## Shovel Nose Truck

Large 1/4" tapered nose plate is 13-1/2" deep, widens to 16" at rear. Beveled leading edge is easier to slide under loads. Frame and extra high 29" stair glides are 1.05" 14 gauge tubing for strength and rigidity. Wheel guards keep loads away from wheels. All frame styles feature 4 curved ribs with vertical center brace and zinc plated adjustable D-Axle.

### T-360 SERIES

| Model No.    | Wheel Description             | Cap. lbs. | Wt. |
|--------------|-------------------------------|-----------|-----|
| ◆ T-360-8S   | 8" x 2.50" Solid Rubber Tire  | 800       | 43  |
| ◆ T-360-10   | 10" x 2.75" Solid Rubber Tire | 800       | 48  |
| ◆ T-360-10P  | 10" x 3.50" Pneumatic         | 800       | 46  |
| ◆ T-360-10FF | 10" x 3.50" Flat-Free         | 600       | 47  |

Foot Kick option available, change prefix from T- to TF-

### T-362 SERIES

| Model No.    | Wheel Description             | Cap. lbs. | Wt. |
|--------------|-------------------------------|-----------|-----|
| ◆ T-362-8S   | 8" x 2.50" Solid Rubber Tire  | 800       | 43  |
| ◆ T-362-10   | 10" x 2.75" Solid Rubber Tire | 800       | 48  |
| ◆ T-362-10P  | 10" x 3.50" Pneumatic         | 800       | 46  |
| ◆ T-362-10FF | 10" x 3.50" Flat-Free         | 600       | 47  |

Foot Kick option available, change prefix from T- to TF-

### T-364 SERIES

| Model No.    | Wheel Description             | Cap. lbs. | Wt. |
|--------------|-------------------------------|-----------|-----|
| ◆ T-364-8S   | 8" x 2.50" Solid Rubber Tire  | 800       | 44  |
| ◆ T-364-10   | 10" x 2.75" Solid Rubber Tire | 800       | 49  |
| ◆ T-364-10P  | 10" x 3.50" Pneumatic         | 800       | 47  |
| ◆ T-364-10FF | 10" x 3.50" Flat-Free         | 600       | 48  |

Foot Kick option available, change prefix from T- to TF-

## WHEELS



**WHEEL NO. 8S**  
Solid rubber  
SIZE: 8" x 2.5"  
Capacity: 400 lbs.



**WHEEL NO. 10**  
Solid rubber  
SIZE: 10" x 2.75"  
Capacity: 400 lbs.



**WHEEL NO. 10P**  
Full pneumatic,  
4 ply tube type  
SIZE: 10" x 3.5"



**WHEEL NO. 10FF**  
Flat-Free  
Microcellular Foam  
SIZE: 10" x 3.5"







## 12" Reinforced Nose Trucks

- 12" DEEP x 14" WIDE REINFORCED NOSE PLATE – safely handles larger, bulky loads.
- 10 YEAR GUARANTEED NOSE PLATE
- 4 CURVED RIBS WITH VERTICAL CENTER STRAP
- HEAVY 1.05" 14 gauge TUBULAR STEEL for added strength to frame and stair glides.
- EXTRA-HIGH 29" STAIR GLIDES provide rigidity and longer frame life.
- ZINC PLATED "D" AXLE IS INTERCHANGEABLE IN TRI-HOLE AXLE BRACKET

### T-200 SERIES

| Model No.    | Wheel Description             | Cap. lbs. | Wt. |
|--------------|-------------------------------|-----------|-----|
| ◆ T-200-8S   | 8" x 2.50" Solid Rubber Tire  | 800       | 34  |
| ◆ T-200-10   | 10" x 2.75" Solid Rubber Tire | 800       | 38  |
| ◆ T-200-10P  | 10" x 3.50" Pneumatic         | 800       | 36  |
| ◆ T-200-10FF | 10" x 3.50" Flat-Free         | 600       | 37  |

Foot Kick option available, change prefix from T- to TF-

### T-220 SERIES


| Model No.    | Wheel Description             | Cap. lbs. | Wt. |
|--------------|-------------------------------|-----------|-----|
| ◆ T-220-8S   | 8" x 2.50" Solid Rubber Tire  | 800       | 34  |
| ◆ T-220-10   | 10" x 2.75" Solid Rubber Tire | 800       | 39  |
| ◆ T-220-10P  | 10" x 3.50" Pneumatic         | 800       | 37  |
| ◆ T-220-10FF | 10" x 3.50" Flat-Free         | 600       | 38  |

Foot Kick option available, change prefix from T- to TF-

### T-240 SERIES

| Model No.    | Wheel Description             | Cap. lbs. | Wt. |
|--------------|-------------------------------|-----------|-----|
| ◆ T-240-8S   | 8" x 2.50" Solid Rubber Tire  | 800       | 35  |
| ◆ T-240-10   | 10" x 2.75" Solid Rubber Tire | 800       | 40  |
| ◆ T-240-10P  | 10" x 3.50" Pneumatic         | 800       | 38  |
| ◆ T-240-10FF | 10" x 3.50" Flat-Free         | 600       | 39  |

Foot Kick option available, change prefix from T- to TF-

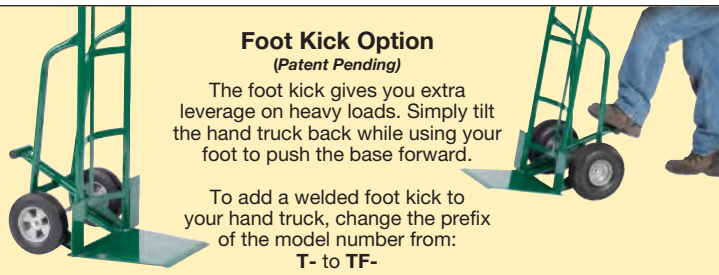

**Foot Kick Option**  
(Patent Pending)

The foot kick gives you extra leverage on heavy loads. Simply tilt the hand truck back while using your foot to push the base forward.

To add a welded foot kick to your hand truck, change the prefix of the model number from:  
T- to TF-

#### REINFORCED NOSE PLATE



All models with guaranteed nose plates are structurally reinforced for extra strength and longer life. Heavy-duty stair glides are flattened and extended under the nose plate, which virtually eliminates breakage.



**T-200 SERIES**  
Continuous Handle, 47" High



**T-220 SERIES**  
Dual Handle, 49" High



**T-240 SERIES**  
Loop Handle, 49" High





Model  
TF-370-10



## 60" Tall Hand Truck with Foot Kick (Patent Pending)

Carry more and make fewer trips with this extended height hand truck. The foot kick gives you extra leverage on heavy loads when starting. Simply tilt the hand truck back while using your foot to push the base forward. You will be amazed how much easier it is to start out. Frame stands 60" tall. The large 13-1/2" deep x 1/4" thick nose plate with tapered front edge measures 16" at the base. Frame is made from 1.05" diameter 14 gauge steel tubing and is fully welded for strength and rigidity. Wheel guards protect the wheels from the load.

| Model No.     | Wheel Description             | Cap. Lbs. | Wt. |
|---------------|-------------------------------|-----------|-----|
| ◆ TF-370-8S   | 8" x 2.50" Solid Rubber Tire  | 800       | 48  |
| ◆ TF-370-10   | 10" x 2.75" Solid Rubber Tire | 800       | 52  |
| ◆ TF-370-10P  | 10" x 3.50" Pneumatic         | 800       | 50  |
| ◆ TF-370-10FF | 10" x 3.50" Flat-Free         | 600       | 51  |



Model  
T-400-10-4R

## Tilt Back Hand Truck

Tilt Back style design provides full support under load making moving heavy loads a breeze. "Hands Free" operation allows the operator to open doors without having to lower the load as with typical hand trucks.

| Model No.     | Wheel Description             | Cap. Lbs. | Wt. |
|---------------|-------------------------------|-----------|-----|
| T-400-10-4R   | 10" x 2.75" Solid Rubber Tire | 800       | 51  |
| T-400-10P-4R  | 10" x 3.50" Pneumatic         | 800       | 49  |
| T-400-10FF-4R | 10" x 3.50" Flat-Free         | 600       | 50  |



Model  
T1000-12P



## Super-Size Hand Truck

Extra large 1/4" thick steel nose plate measures 24"W x 12"D. Oversized frame is 55" tall and constructed of 1-5/16" diameter 12 gauge steel tubing. Pneumatic wheels are 12" x 3-1/2", tube type, with 4 Ply Rating and 1" roller bearings. Durable green powder coat finish.

| Model No.  | Wheel Description     | Cap. Lbs. | Wt. |
|------------|-----------------------|-----------|-----|
| T-1000-12P | 12" x 3.50" Pneumatic | 800       | 85  |



## TW-40

Single cylinder cart features 1.05" O.D. tubing for strength. Nose plate is full 8" deep x 14" wide. Support chain is securely welded to frame to hold cylinder. Equipped with semi-pneumatic or pneumatic wheels. Overall height 47".

| Model No.                          | Wheel Description          | Cap. Lbs. | Wt. |
|------------------------------------|----------------------------|-----------|-----|
| <b>Continuous Handle, 47" High</b> |                            |           |     |
| ◆ TW-40-10                         | 10" x 2.75" Semi-Pneumatic | 800       | 36  |
| ◆ TW-40-10P                        | 10" x 3.5" Pneumatic       | 800       | 34  |
| ◆ TW-40-10FF                       | 10" x 3.5" Flat-Free       | 600       | 35  |
| <b>Dual Handle, 49" High</b>       |                            |           |     |
| TW-42-10                           | 10" x 2.75" Semi-Pneumatic | 800       | 36  |
| TW-42-10P                          | 10" x 3.5" Pneumatic       | 800       | 34  |
| TW-42-10FF                         | 10" x 3.5" Flat-Free       | 600       | 35  |



Model  
TW-40-10



Dual Handle  
Model TW-42



## TW-30

Four-wheel cart holds 2 standard 9" diameter cylinders. Equipped with 2 swivel casters and 2 large load wheels. Includes a removable tool tray measuring 12"W x 4"L x 2"D, 2 rod holders, and safety chains to help secure cylinders. Overall dimensions 21-1/2"W x 36"L x 40"H.

| Model No. | Load Wheels                         | Casters               | Wt. |
|-----------|-------------------------------------|-----------------------|-----|
| ◆ TW-30   | 10" x 2.75"<br>Solid Cushion Rubber | 4" x 1-1/4"<br>Rubber | 57  |



Model  
TW-30



## TW-70

Tilt-back truck stabilizes the load on 4 wheels for less effort when transporting cylinders. Safety chains secure cylinder to truck. 800 lbs. capacity.

| Model No.    | Wheel Size                        | Casters               | Wt. |
|--------------|-----------------------------------|-----------------------|-----|
| TW-70-8SR-3R | 8" x 2.5"<br>Solid Cushion Rubber | 3" x 1-1/4"<br>Rubber | 48  |



Model  
TW-70-8SR-3R



## TW-50

Popular double cylinder truck features a 14" x 24" base plate braced underneath with angle iron. Lip on back assists prevention of cylinder movement. Continuous handle is strong and safe. Furnished with large tool tray. Overall height 48".

| Model No. | Wheel Size                 | Load Cap. Lbs. | Wt. |
|-----------|----------------------------|----------------|-----|
| TW-50-10  | 10" x 2.75" Semi-pneumatic | 800            | 63  |
| TW-50-12P | 12" x 3" Pneumatic         | 800            | 66  |
| TW-50-16P | 16" x 4" Pneumatic         | 800            | 69  |



Model  
TW-50-16P



**Model**  
**WC-2039-5PYTL**

## Welding Cart

Heavy-duty all-welded Welding Cart. Tank platform is 10"D x 20" W and has low ground clearance for loading cylinder(s) without the strain of lifting. Includes a heavy chain for securing cylinders. Bottom 12 gauge shelf measures 20" x 29" and accommodates most medium to large power sources. Top shelf measures 20" x 16" - perfect for feeders - with hooks on either side for winding cables. 2 rigid and 2 swivel total lock casters with 5" polyurethane wheels. Rigid casters mounted outside the tank platform for maximum stability. Durable powder coated gray finish.

| Model No.     | Overall L x W | Wt. |
|---------------|---------------|-----|
| WC-2039-5PYTL | 39 x 25       | 98  |



**Model**  
**GST-8-8PH**

## Gas Cylinder Truck

**Capacities (6) or (8) 9-1/4" Cylinders**

Move bulky gas cylinders by hand with this heavy-duty steel truck. Thick 7 gauge deck is reinforced with 1-1/2" square tubing and substantial 7 gauge gussets. Square tube uprights support 1/4" thick corral dividers. Heavy-duty chain secures the cylinders during transport. Low deck for easy loading and unloading. 2 swivel and 2 rigid casters with 8" phenolic wheels. Loop handle at swivel end. Overall height (empty) is 48".

| Cylinder Capacity | Overall W x D | Model No. | Wt. |
|-------------------|---------------|-----------|-----|
| 6                 | 24 x 50       | GST-6-8PH | 200 |
| 8                 | 24 x 60       | GST-8-8PH | 263 |



**Model**  
**GSP-4**

## Gas Cylinder Pallet

**Capacities (4), (6) or (8) 9-1/4" Cylinders**

Load bulky gas cylinders for transport by forklift with this heavy-duty steel platform. Thick 7 gauge formed deck is flanked by solid fork pockets that run the length of the unit. Angle iron uprights with angle gussets for strength. Dividers with loop handles secure the cylinders during transport. Overall height (empty) is 41".

| Cylinder Capacity | Overall W x D | Model No. | Wt. |
|-------------------|---------------|-----------|-----|
| 4                 | 33 x 25       | GSP-4     | 140 |
| 6                 | 33 x 36       | GSP-6     | 180 |
| 8                 | 33 x 47       | GSP-8     | 220 |





## Gas Cylinder Storage Units

All-welded units ship set up. 13 gauge expanded metal for ventilation and visibility. Sloped roof is sheet steel. Angle frame with back panels reinforced for protection against slamming cylinders. Includes padlock hasp. Legs have 1/2" hole for bolting to floor. Helps meet OSHA 1910 requirements and NFPA standards. Yellow powder coated finish.


| Model No.  | Cylinder Capacity           | Overall W x D x H | Wt. |
|--|-----------------------------|-------------------|-----|
| <b>HORIZONTAL CYLINDER STORAGE CABINETS</b>            |                             |                   |     |
| <b>For 20-43 lbs. LPG Cylinders Up To 13" Diameter</b> |                             |                   |     |
| GSH-36W-40H  | 4                           | 36 x 38 x 40      | 211 |
| GSH-36W-70H  | 8                           | 36 x 38 x 70      | 313 |
| GSH-72W-70H  | 16                          | 72 x 38 x 70      | 544 |
| <b>UPRIGHT CYLINDER STORAGE CABINETS</b>               |                             |                   |     |
| <b>For 20-43 lbs. Cylinders Up To 33" Tall</b>         |                             |                   |     |
| GSU-24D-40H  | 2-3                         | 36 x 26 x 40      | 133 |
| GSU-36W-40H  | 4-6                         | 36 x 38 x 40      | 165 |
| <b>For Upright Cylinders Up To 68" Tall</b>            |                             |                   |     |
| GSU-36W-70H  | 5-15                        | 36 x 38 x 70      | 218 |
| GSU-72W-70H  | 10-30                       | 72 x 38 x 70      | 346 |
| <b>COMBINATION UPRIGHT &amp; HORIZONTAL STORAGE</b>    |                             |                   |     |
| GSC-72W-70H  | 8 Horizontal & 5-15 Upright | 72 x 38 x 70      | 455 |



Model  
GSH-36W-70H



Model  
GSU-36W-40H



Model  
GSC-72W-70H

## Gas Cylinder Storage Units

Two compartments clearly labelled to separate your "Full" and "Empty" gas cylinders. Eliminates costly downtime caused by running out of "full" cylinders or installing an empty cylinder. Each compartment holds 5-15 upright cylinders. All welded construction with powder coated finish ships set up. Measures 72" W x 38" D x 70" H.

| Model No.    | Cylinder Capacity                               | Overall W x D x H | Wt. |
|--------------|---|-------------------|-----|
| GSU2-72W-70H | 5-15 Upright in Each<br>Compartment 10-30 Total | 72 x 38 x 70      | 424 |



Model  
GSU2-72W-70H

## Industrial Gas Cylinder Cage

Designed to securely store industrial lift-truck propane tanks. All-welded cage has a 12 gauge top. Stores up to 12 cylinders horizontally with lockable door. Accommodates 20, 33, and 44 lb propane tanks. Lag-holes in footpads for mounting to floor. Powder coated safety-yellow finish. High-visibility "Danger/Flammable" sign. Helps meet OSHA 1910 requirements.

| Cylinder Capacity | D x W x H    | Model No.   | Wt. |
|-------------------|--------------|-------------|-----|
| 8                 | 36 x 36 x 70 | GSC-3636-70 | 220 |
| 12                | 36 x 48 x 70 | GSC-3648-70 | 275 |




Model  
GSC-3636-70



**4-Drum  
Forkliftable  
with Ramp**



**6-Drum Forkliftable**



All platforms feature full height internal support channels with flow-through vents.



**Model  
SSB-5125**



**Model  
SSP-5151**



## Spill-Control Platforms

Heavy gauge steel construction holds up in applications where plastic units just won't do, either for durability reasons, or when materials being stored are not compatible with plastic. Welded steel bar grating is removable for easy clean-up. Drip Channels "hook" units of same heights together, help prevent drainage between units. Optional Ramps available in 2 heights. All models help you comply with EPA and OSHA requirements; models with 66 and 99 gallon capacity help you comply with Uniform Fire Code.

### FORKLIFTABLE MODELS

4-way fork entry with 4" underclearance.

|               | SUMP CAP. | DIMENSIONS W x L x H | Model No.   | Ship Wt. | Capacity Lbs. UDL |
|---------------|-----------|----------------------|-------------|----------|-------------------|
| 2-Drum        | 33 gal.   | 51 x 26 x 10.5       | SST-5125    | 138      | 2000              |
| 2-Drum        | 66 gal.   | 51 x 26 x 16         | SST-5125-66 | 171      | 2000              |
| 4-Drum        | 66 gal.   | 51 x 51 x 10.5       | SST-5151    | 259      | 4000              |
| 6-Drum        | 99 gal.   | 76 x 51 x 10.5       | SST-5176    | 381      | 6000              |
| Ramp*         | -         | 33 x 42 x 10.5       | SST-RAMP    | 95       | 1500              |
| Drip Channels | -         | 25-1/2" L            | DCC         | 2        | -                 |

\*Ramp not for use with SST-5125-66

### LOW-PROFILE MODELS

Low platform height offers easy access to stored materials, easier loading and unloading of drums.

|               | SUMP CAP. | DIMENSIONS W x L x H | Model No.   | Ship Wt. | Capacity Lbs. UDL |
|---------------|-----------|----------------------|-------------|----------|-------------------|
| 2-Drum        | 33 gal.   | 51 x 26 x 6.5        | SSB-5125    | 125      | 3000              |
| 2-Drum        | 66 gal.   | 51 x 26 x 12         | SSB-5125-66 | 158      | 3000              |
| 4-Drum        | 66 gal.   | 51 x 51 x 6.5        | SSB-5151    | 233      | 6000              |
| 6-Drum        | 99 gal.   | 76 x 51 x 6.5        | SSB-5176    | 358      | 9000              |
| Ramp*         | -         | 33 x 36 x 6.5        | SSB-RAMP    | 70       | 1500              |
| Drip Channels | -         | 25-1/2" L            | DCC         | 2        | -                 |

\*Ramp not for use with SSB-5125-66

## Spill-Control Platform with Pallet Supports

An economical spill control platform that works with your palletized drums to store liquids while controlling leaks and spills. Deck is constructed from 12 gauge steel with flow through pallet supports to allow fluids to evenly distribute. Each unit is fully welded and powder coated.

|        | SUMP CAP. | DIMENSIONS W x L x H | Model No. | Ship Wt. | Capacity Lbs. UDL |
|--------|-----------|----------------------|-----------|----------|-------------------|
| 4-Drum | 66 gal.   | 51 x 51 x 6.5        | SSP-5151  | 213      | 4000              |



## IBC Containment & Dispensing Station

Heavy gauge steel construction for durability and extended life. Large 400 gallon sump capacity with 10,000 lbs. load capacity. Steel grating deck panels are easily removable for cleaning. Includes drain plug and grounding screw. Helps you comply with EPA requirements.

### SINGLE IBC UNIT

Large deck surface has room for additional storage. Three-piece steel grating deck is 29" high. "Convertible" deck allows IBC to be positioned for internal dispensing within sump area. Included pail holder shelf attaches conveniently to inside or outside of sump.

| Model No. | Overall Size       | Capacity | Wt. (lbs.) |
|-----------|--------------------|----------|------------|
| SST-IBC   | 51"W x 76"L x 29"H | 400 gal  | 625        |



*Right: Positioned widthwise, Pail Shelf can be hung outside of sump, allowing extra storage space on deck.*

**Model SST-IBC**

### DOUBLE IBC UNIT

Convenience of storing 2 IBC's side by side, and a lower profile for easier access. Four piece removable grating deck is 23" high. Includes 2 removable pail holder shelves.

| Model No. | Overall Size       | Capacity | Wt. (lbs.) |
|-----------|--------------------|----------|------------|
| SST-IBC-2 | 51"W x 99"L x 23"H | 400 gal  | 702        |



**Model SST-IBC-2**

## Spill Control Platform with Drum Rack

Heavy gauge steel construction in a drum storage system that position the drums ready for dispensing. 1- Drum unit has 33 gallon sump capacity and 2- Drum unit has 66 gallon sump capacity. Both include 4 way forkliftable access.

| Drum Capacity | Dimensions W x L x H | Model No.   | Wt. |
|---------------|----------------------|-------------|-----|
| 1-Drum        | 26 x 51 x 22         | SST-5125-1D | 105 |
| 2-Drum        | 51 x 51 x 22         | SST-5151-2D | 170 |



**Model SST-5151-2D**





## 2-Drum Spill Control Cart

**3000 lbs. Capacity**

Durable welded steel construction – stronger than plastic and non-combustible. Sump has removable steel bar grating deck for easy clean-ups. Chemical resistant 6” polyurethane casters, 2 rigid and 2 swivel with wheel brakes to help prevent unwanted movement. Removable pipe handle with cross brace extends 25” above top of sump.

| Deck<br>W x L x H | Model No.       | Capacity  | Wt. |
|-------------------|-----------------|-----------|-----|
| 26 x 51 x 14      | SSB-5125-6PYBK  | 33 gallon | 170 |
| 26 x 51 x 19-1/2  | SSB512566-6PYBK | 66 gallon | 203 |



## 4-Drum Spill Control Cart with Floor Lock

**3000 lbs. Capacity**

This mobile containment cart allows you to store and transport up to 4-55 gallon drums. The Floor Lock helps prevent unwanted movement once the cart is in position. All-welded steel construction with a 66 gallon sump capacity and removable bar grating for easy clean-ups. 2 swivel, 2 rigid 6” x 2” polyurethane casters. Removable pipe handle with cross braces is 36” wide.

| Deck<br>W x L x H | Model No.      | Wt. |
|-------------------|----------------|-----|
| 51 x 51 x 15-1/2  | SSB-5151-6PYFL | 301 |



## Rack Decking with Spill Control Sump

Designed to fit with your existing pallet racks, this spill control platform installs quickly and will contain liquids from dripping below. Top grating is 51” deep x 49” wide with two sump sizes to fit either 42” or 48” deep pallet racks. Both sizes have a 66 gallon sump capacity to help you comply with EPA regulations.

| Deck<br>W x L x H | Model No.     | Description                | Wt. |
|-------------------|---------------|----------------------------|-----|
| 51 x 49 x 8-1/2   | SS-RD-5149-42 | Fits 42” deep pallet racks | 254 |
| 51 x 49 x 7-1/2   | SS-RD-5149-48 | Fits 48” deep pallet racks | 240 |



## SOLID STEEL Rack Decking

Smooth 14 gauge steel surface with durable powder coated finish. 12 gauge reinforcing channels on underside fit 1-5/8" step beams. 1-1/2" waterfall on front & back edges. Each decking section has a load capacity of 3000 lbs.



*Model  
RD-4846-4*

| Section Width | 24" Overall Depth (20-1/4" channels) |     | 36" Overall Depth (32-1/4" channels) |     | 42" Overall Depth (38-1/4" Channels) |     | 48" Overall Depth (44-1/4" Channels) |     |
|---------------|--------------------------------------|-----|--------------------------------------|-----|--------------------------------------|-----|--------------------------------------|-----|
|               | Model No.                            | Wt. | Model No.                            | Wt. | Model No.                            | Wt. | Model No.                            | Wt. |
| 46            | RD-2446-3                            | 40  | RD-3646-3                            | 58  | RD-4246-3                            | 65  | RD-4846-4                            | 82  |
| 52            | RD-2452-3                            | 41  | RD-3652-3                            | 61  | RD-4252-3                            | 71  | RD-4852-4                            | 89  |
| 58            | RD-2458-3                            | 44  | RD-3658-3                            | 66  | RD-4258-3                            | 77  | RD-4858-4                            | 96  |

## PERFORATED STEEL Rack Decking

**3000 lbs. Capacity**

14 gauge steel deck with 1" diameter hole perforations. 12 gauge reinforcement channels fit 1-5/8" step beams. Each deck has a 1-1/2" waterfall on front and rear. Deck measures 46" wide. Available in 3 standard rack depths - 36", 42", 48". Durable powder coated gray finish.



*Model  
RDP-4846-4*

| Deck Size D x W | Model No.  | Wt. |
|-----------------|------------|-----|
| 36 x 46         | RDP-3646-3 | 54  |
| 42 x 46         | RDP-4246-3 | 60  |
| 48 x 46         | RDP-4846-4 | 77  |

## Skid Supports

**2500 lbs. Capacity per pair**

Supports loads that are smaller than the shelf depth. No Tools needed! Constructed from 12 gauge steel these supports hook over the pallet rack cross beams for extra stability. Durable gray powder coat finish. Available in standard racking depths - 36", 42" and 48" deep.



*Model  
RDB-48*

| Size | Model No. | Wt. |
|------|-----------|-----|
| 36"  | RDB-36    | 11  |
| 42"  | RDB-42    | 13  |
| 48"  | RDB-48    | 14  |

## SOLID STEEL Post Protectors

Protect pallet rack uprights from damage. 3/16" thick formed steel with durable powder coated safety yellow finish. Available in 3 styles and 3 heights for protecting ends and corners. Lag holes are 9/16" diameter. Mounting hardware not included.



*Model  
PP-2-12*



*Model  
PP-3-12*



*Model  
PP-4-12*

| Two-Sided (Corner Style) |           |     | Three-Sided |           |     | Three-Sided with Form |           |     |
|--------------------------|-----------|-----|-------------|-----------|-----|-----------------------|-----------|-----|
| Height                   | Model No. | Wt. | Height      | Model No. | Wt. | Height                | Model No. | Wt. |
| 12"                      | PP-2-12   | 5   | 12"         | PP-3-12   | 7   | 12"                   | PP-4-12   | 7   |
| 17"                      | PP-2-17   | 7   | 17"         | PP-3-17   | 10  | 17"                   | PP-4-17   | 10  |
| 23"                      | PP-2-23   | 9   | 23"         | PP-3-23   | 13  | 23"                   | PP-4-23   | 13  |



Model  
5SH-2448-72

## HEAVY-DUTY Welded Steel Shelving

Reinforced 12 gauge steel shelves with 2000 lbs. capacity per shelf. 2" x 2" x 3/16" corner angles have footpads with anchor. 72" overall height with 3-1/2" bottom shelf under-clearance. Ships set up and ready for immediate use.

| D x W   | 4 Shelf<br>20-3/4" Shelf Clearance |     | 5 Shelf<br>15" Shelf Clearance |     |
|---------|------------------------------------|-----|--------------------------------|-----|
|         | Model No.                          | Wt. | Model No.                      | Wt. |
| 18 x 32 | 4SH-1832-72                        | 156 | 5SH-1832-72                    | 179 |
| 24 x 36 | 4SH-2436-72                        | 195 | 5SH-2436-72                    | 227 |
| 24 x 48 | 4SH-2448-72                        | 253 | 5SH-2448-72                    | 299 |
| 24 x 60 | 4SH-2460-72                        | 298 | 5SH-2460-72                    | 356 |
| 30 x 48 | 4SH-3048-72                        | 291 | 5SH-3048-72                    | 364 |
| 30 x 60 | 4SH-3060-72                        | 344 | 5SH-3060-72                    | 414 |
| 30 x 72 | 4SH-3072-72                        | 421 | 5SH-3072-72                    | 511 |
| 36 x 60 | 4SH-3660-72                        | 394 | 5SH-3660-72                    | 475 |
| 36 x 72 | 4SH-3672-72                        | 478 | 5SH-3672-72                    | 583 |



Model  
4SHS-2448-72

## WELDED Gravity Flow Shelving

12 gauge steel shelves reinforced with 1-1/2" angle are sloped 15° to provide easy access and make the contents more visible to your employees. 2" x 2" x 3/16" corner angles with footpads and mounting holes to anchor the shelves to the floor. Each shelf has 1/2" retaining lip to retain the items. Shelf openings are 18". 3-1/2" clearance under the unit provides access for a pallet jack.

| Shelf Size<br>D x W | Model No.    | Wt. |
|---------------------|--------------|-----|
| 24 x 48             | 4SHS-2448-72 | 282 |
| 24 x 60             | 4SHS-2460-72 | 332 |



Model  
HRS-3648-3

## HEAVY-DUTY Tool and Die Shelving

**1000 lbs. per shelf Capacity**

Two roll-out shelves extend 100% for ease of access. Great for heavy tooling, dies, and large parts that require an overhead crane or forklift to load and unload.

The frame is built of 1/4" thick structural angle. Roll-out shelves are reinforced with 7 gauge steel and 12 gauge decks. Roll-out shelves measure 48" wide x 36" deep. Fixed top shelf provides additional storage space. Shelf clearance is 22". Unit comes with lag holes for anchoring to the floor. Ships partially set up. Some assembly required.

| Overall<br>W x D x H | Model No.  | Wt. |
|----------------------|------------|-----|
| 53 x 36 x 60         | HRS-3648-3 | 585 |

*Special sizes and more shelves available upon request.*



## All-Welded Storage Lockers

Secure, visible storage for larger, bulkier items. 13 gauge expanded metal has small 3/4" x 1-1/2" diamond-shaped openings. Doors swing open a full 270 degrees and feature a padlockable slide latch. 4" underclearance for transporting with pallet truck or fork lift. 72" interior height, 78" overall height. Welded unit ships set up and ready for immediate use.

| Interior*<br>D x W | No Center Shelves<br>Model No. | Wt. | 1 Center Shelf<br>Model No. | Wt. | 2 Center Shelves<br>Model No. | Wt. |
|--------------------|--------------------------------|-----|-----------------------------|-----|-------------------------------|-----|
| 24 x 48            | SLN-2448                       | 230 | SL1-2448                    | 253 | SL2-2448                      | 283 |
| 24 x 60            | SLN-2460                       | 258 | SL1-2460                    | 287 | SL2-2460                      | 324 |
| 30 x 48            | SLN-3048                       | 241 | SL1-3048                    | 270 | SL2-3048                      | 307 |
| 30 x 60            | SLN-3060                       | 276 | SL1-3060                    | 312 | SL2-3060                      | 357 |
| 30 x 72            | SLN-3072                       | 307 | SL1-3072                    | 372 | SL2-3072                      | 447 |
| 36 x 60            | SLN-3660                       | 309 | SL1-3660                    | 374 | SL2-3660                      | 449 |
| 36 x 72            | SLN-3672                       | 357 | SL1-3672                    | 435 | SL2-3672                      | 524 |

\* Note: For Outside Dimensions- Depth add 3", Width add 1"

Model  
SLN-2448



## Adjustable Shelf Models

Welded Storage Locker with 1 or 2 adjustable center shelves. Shelves are adjustable on 3-1/2" centers, from 12" to 60" above the bottom deck, and are also removable.

| Interior*<br>D x W | 1 Adjustable Center Shelf<br>Model No. | Wt. | 2 Adjustable Center Shelves<br>Model No. | Wt. |
|--------------------|--|-----|--|-----|
| 24 x 48            | SL1-A-2448                             | 289 | SL2-A-2448                               | 313 |
| 24 x 60            | SL1-A-2460                             | 323 | SL2-A-2460                               | 354 |
| 30 x 48            | SL1-A-3048                             | 306 | SL2-A-3048                               | 337 |
| 30 x 60            | SL1-A-3060                             | 348 | SL2-A-3060                               | 387 |

\* Note: For Outside Dimensions- Depth add 3", Width add 1"

Model  
SL2-A-2448



## High Visibility Storage Cabinet

Diamond shaped perforated doors allow visibility to the contents inside while maintaining security and organization. Three point locking system with keyed handle. 14 gauge shelves adjust in 3-1/2" increments. Doors open 180 degrees allowing full access to the contents inside. Overall height is 78" with 5-1/2" of underclearance to permit movement by pallet truck. Durable gray powder coated finish.

| Interior<br>D x W | 2 Adj. Shelves<br>Model No. | Wt. | 3 Adj. Shelves<br>Model No. | Wt. |
|-------------------|-----------------------------|-----|-----------------------------|-----|
| 24 x 48           | SSLP2-A-2448                | 477 | SSLP3-A-2448                | 507 |
| 24 x 60           | SSLP2-A-2460                | 558 | SSLP3-A-2460                | 595 |
| 30 x 48           | SSLP2-A-3048                | 533 | SSLP3-A-3048                | 570 |
| 30 x 60           | SSLP2-A-3060                | 622 | SSLP3-A-3060                | 668 |

Model  
SSLP2-A-2448







**Model**  
**SLC-2-3048**

## Combination Cabinets with 2 Half Shelves

Three half shelves for neatly storing smaller items, and one full-height opening for your larger, bulkier items. Expanded metal provides both visibility and ventilation. Doors open 270 degrees back to the sides and out of the way. All-welded unit ships set up and ready to use. 78" overall height, with 4" underclearance. Interior height 72". Padlockable slide latch. Durable powder coated finish.

| Interior* D x W | Model No.  | Wt. |
|-----------------|------------|-----|
| 24 x 48         | SLC-2-2448 | 284 |
| 24 x 60         | SLC-2-2460 | 319 |
| 30 x 48         | SLC-2-3048 | 304 |
| 30 x 60         | SLC-2-3060 | 347 |

\* Note: For Outside Dimensions- Depth add 3", Width add 1"



**Model**  
**SL5-2424-78**

## ALL-WELDED COMPACT Storage Locker

Compact all-welded storage locker has five 14 gauge shelves and heavy-duty padlockable slide latch. High-visibility 13 gauge expanded metal siding. Footpads have holes for lagging to floor. Right hand door swings 270° flush to side. 78" overall height. 4" under-clearance. Durable powder coated gray finish.

| Interior* D x W | Model No.   | Wt. |
|-----------------|-------------|-----|
| 24 x 24         | SL5-2424-78 | 223 |

Shelf clearance from bottom to top: 16.5", 16.5", 12", 10", 10".

\* Note: For Outside Dimensions- Depth add 3", Width add 1"



**Model**  
**SC-2448-NC**

## VISIBLE CONTENTS Welded Storage Lockers

**2000 lbs. Capacity**

These stationary security cabinets measure only 52" overall height. Small diamond shaped openings and heavy gauge steel provide maximum security for small items. The double doors swing open 270 degrees, and feature padlockable slide latch. 48" interior cabinet height. Oversized footpads for better weight distribution, 4" underclearance. All-welded steel construction with durable powder coated finish.

## Adjustable Shelf Models

Removable center shelf is adjustable in 3-1/2" increments.

| Interior*<br>D x W | No Center Shelf |     | 1 Fixed Center Shelf |     | 2 Fixed Center Shelves |     | 1 Adjustable Center Shelf |     |
|--------------------|-----------------|-----|----------------------|-----|------------------------|-----|---------------------------|-----|
|                    | Model No.       | Wt. | Model No.            | Wt. | Model No.              | Wt. | Model No.                 | Wt. |
| 24 x 48            | SCN-2448-NC     | 174 | SC-2448-NC           | 204 | SC2-2448-NC            | 234 | SC-A-2448-NC              | 230 |
| 24 x 60            | SCN-2460-NC     | 184 | SC-2460-NC           | 216 | SC2-2460-NC            | 254 | SC-A-2460-NC              | 240 |
| 30 x 48            | SCN-3048-NC     | 184 | SC-3048-NC           | 218 | SC2-3048-NC            | 255 | SC-A-3048-NC              | 246 |
| 30 x 60            | SCN-3060-NC     | 233 | SC-3060-NC           | 263 | SC2-3060-NC            | 308 | SC-A-3060-NC              | 291 |
| 30 x 72            | SCN-3072-NC     | 284 | SC-3072-NC           | 331 | SC2-3072-NC            | 406 | -                         | -   |
| 36 x 60            | SCN-3660-NC     | 280 | SC-3660-NC           | 333 | SC2-3660-NC            | 408 | -                         | -   |
| 36 x 72            | SCN-3672-NC     | 338 | SC-3672-NC           | 380 | SC2-3672-NC            | 439 | -                         | -   |

\* Note: For Outside Dimensions- Depth add 3", Width add 1"



## Tool Storage Locker with Pegboard

Perfect for your “lean manufacturing” shop. Efficiently organize your tools, supplies and equipment without clutter. Quickly locate the tool you need in seconds. The 16 gauge steel pegboard with holes 1” on center uses standard pegboard hooks. Use tool outlines to immediately indicate when a tool is missing. The 13 gauge steel mesh provides both visibility and security. Doors fully open 270 degrees and feature a padlockable slide latch. Has one shelf located 19” above base. 72” interior height. 78” overall height with 4” leg clearance to allow transporting by pallet truck or fork lift. (Pegs and bins not included.)

| Interior*<br>D x W | Model No.   | Wt. |
|--------------------|-------------|-----|
| 24 x 48            | SL1-2448-PB | 295 |
| 24 x 60            | SL1-2460-PB | 339 |
| 30 x 48            | SL1-3048-PB | 312 |
| 30 x 60            | SL1-3060-PB | 364 |

\* Note: For Outside Dimensions- Depth add 3”, Width add 1”



Model  
SL1-2448-PB

## Tool Security Cart with Pegboard Tool Storage

2000 lbs. Capacity

Heavy-Duty Mobile Tool Locker features a 16 gauge steel pegboard with holes 1” on center (uses standard pegboard hooks). Expanded metal with small 3/4” x 1-1/2” diamond-shaped openings provides secure, visible storage for all your tools. Doors swing open a full 270 degrees and feature a padlockable slide latch. 2 rigid, 2 swivel non-marking polyurethane wheels. Interior height 48”, overall height 56”. Available with or without 1 center shelf. Fully welded, ships set up and ready for immediate use. Durable powder-coated gray finish.

| Size    | No Center Shelf<br>Model No. | Wt. | 1 Center Shelf<br>Model No. | Wt. |
|---------|------------------------------|-----|-----------------------------|-----|
| 24 x 48 | SCN-2448-6PY-PB              | 206 | SC1-2448-6PY-PB             | 236 |
| 24 x 60 | SCN-2460-6PY-PB              | 221 | SC1-2460-6PY-PB             | 235 |

For Louvered Panel, replace -PB with -LP



Model  
SC1-2448-6PY-PB

## 2-Sided Mobile Maintenance Cart with Pegboard or Louvered Panels

3600 lbs. Capacity

Heavy-duty double-sided tool bench cart with either pegboard or louvered separator to organize your tools or parts so they are ready when you need them. Two sided construction keeps your tools or parts in easy reach. 13 gauge expanded metal ends and secure 14 gauge perforated doors make locating the right tool easy while maintaining secure storage when not in use. Doors on both sides with padlockable slide latch. 6” Polyurethane wheels provide smooth rolling for easy maneuverability.

| Size    | Pegboard Panel<br>Model No. | Wt. | Louvered Panel<br>Model No. | Wt. |
|---------|-----------------------------|-----|-----------------------------|-----|
| 24 x 48 | ST-2448-6PY-PB              | 215 | ST-2448-6PY-LP              | 215 |



Model  
ST-2448-6PY-PB



**2 Adjustable Shelves**  
Model  
SSL2-A-2448

## High Capacity Storage Cabinet

**2000 lbs. Capacity**

Rugged 12 gauge all-welded cabinet is designed for long term use in the most demanding environments. Secure 3 point latching system with keyed handle secures the doors at the top, center, and bottom. 14 gauge shelves are adjustable in 3-1/2" increments. Door swing is 180 degrees allowing complete access to the interior. Durable powder coated gray finish. Overall height 78".

| Interior D x W | 2 Adj. Shelves Model No. | Wt. | 3 Adj. Shelves Model No. | Wt. |
|----------------|--------------------------|-----|--------------------------|-----|
| 24 x 48        | SSL2-A-2448              | 486 | SSL3-A-2448              | 516 |
| 24 x 60        | SSL2-A-2460              | 567 | SSL3-A-2460              | 604 |
| 30 x 48        | SSL2-A-3048              | 542 | SSL3-A-3048              | 579 |
| 30 x 60        | SSL2-A-3060              | 631 | SSL3-A-3060              | 677 |



Model  
SSL2-A-2448

## Mobile Storage Locker Solid Sides

**2000 lbs. Capacity**

Welded 14 gauge construction with solid sides and top for extra durability while keeping contents out of sight. 6" x 2" polyurethane casters, 2 swivel and 2 rigid. Interior height 48", overall height 56". Doors open 270 degrees and feature padlockable slide latch. Gray powder coat finish.



Model  
SSC-3048-6PPY

| Interior* D x W | No Center Shelf Model No. | Wt. | 1 Center Shelf Model No. | Wt. | 2 Center Shelves Model No. | Wt. |
|-----------------|---------------------------|-----|--------------------------|-----|----------------------------|-----|
| 24 x 48         | SSCN-2448-6PPY            | 312 | SSC-2448-6PPY            | 342 | SSC2-2448-6PPY             | 372 |
| 24 x 60         | SSCN-2460-6PPY            | 344 | SSC-2460-6PPY            | 376 | SSC2-2460-6PPY             | 414 |
| 30 x 48         | SSCN-3048-6PPY            | 344 | SSC-3048-6PPY            | 370 | SSC2-3048-6PPY             | 407 |
| 30 x 60         | SSCN-3060-6PPY            | 408 | SSC-3060-6PPY            | 438 | SSC2-3060-6PPY             | 438 |

\* Note: For Outside Dimensions- Depth add 3", Width add 1"

## Adjustable Shelf Models

One center shelf, adjustable on 3-1/2" centers.

| Interior* D x W | Model No.       | Wt. |
|-----------------|-----------------|-----|
| 24 x 48         | SSC-A-2448-6PPY | 372 |
| 24 x 60         | SSC-A-2460-6PPY | 406 |
| 30 x 48         | SSC-A-3048-6PPY | 400 |
| 30 x 60         | SSC-A-3060-6PPY | 468 |

\* Note: For Outside Dimensions- Depth add 3", Width add 1"



## High Capacity Storage Cabinet with Pegboard Doors

Heavy-duty 12 gauge steel, all welded cabinet. Additionally each door has 16 gauge steel pegboard panels built in for additional storage. Doors fully open 180 degrees to allow complete access. The pegboards have round holes on 1" centers that accept most common hooks and are perfect for keeping your tools visible and easy to grab. Available with 2 or 3 adjustable 14 gauge shelves that adjust on 3-1/2" increments. Keyed handle with 3 point locking system keeps doors secure. Gray powder coat finish.

| Interior D x W | 2 Adj. Shelves Model No. | Wt. | 3 Adj. Shelves Model No. | Wt. |
|----------------|--------------------------|-----|--------------------------|-----|
| 24 x 48        | SSL2-A-2448-PBD          | 531 | SSL3-A-2448-PBD          | 561 |
| 24 x 60        | SSL2-A-2460-PBD          | 612 | SSL3-A-2460-PBD          | 649 |
| 30 x 48        | SSL2-A-3048-PBD          | 593 | SSL3-A-3048-PBD          | 630 |
| 30 x 60        | SSL2-A-3060-PBD          | 682 | SSL3-A-3060-PBD          | 728 |



Model  
SSL2-A-2448-PBD

## Cabinet Style Work Center with Pegboard or Louvered Back

Heavy-duty 12 gauge steel, all-welded cabinet features either a 16 gauge steel pegboard or louvered panel and a 42" high hardboard work surface to efficiently organize, store, and work in one convenient location. 250 lb. capacity drawer measures 26"W x 20"D x 6"H and provides ample storage for loose or hard to hang tools. The heavy-duty drawer features heavy-duty rollers, a full-width recessed handle, and a padlock hasp. Clearance under drawer is 23-1/2". Keyed handle with 3 point locking system keeps doors secure. 5-1/2" ground clearance permits movement by pallet truck.

| Size    | Pegboard Panel Model No. | Wt. | Louvered Panel Model No. | Wt. |
|---------|--------------------------|-----|--------------------------|-----|
| 24 x 48 | SSW-2448-HD-PB           | 517 | SSW-2448-HD-LP           | 517 |
| 24 x 60 | SSW-2460-HD-PB           | 604 | SSW-2460-HD-LP           | 604 |



Model  
SSW-2448-HD-PB





Model  
SC-3048-6PPY

## HEAVY-DUTY Mobile Storage Locker

2000 lbs. Capacity

The small 3/4" x 1-1/2" diamond shaped openings and heavy gauge of the flattened expanded metal on this truck provide maximum security for even the smallest items, while still allowing good visibility and air circulation. The double doors swing open a full 270 degrees, back to the sides and out of the way, and have a padlockable slide latch. Interior height 48", overall height 56" with 2 swivel and 2 rigid, 6" x 2" non-marking polyurethane wheels.

| Interior*<br>D x W | No Center Shelf<br>Model No. | Wt. | 1 Center Shelf<br>Model No. | Wt. | 2 Center Shelves<br>Model No. | Wt. |
|--------------------|------------------------------|-----|-----------------------------|-----|-------------------------------|-----|
| 24 x 48            | SCN-2448-6PPY                | 186 | SC-2448-6PPY                | 216 | SC2-2448-6PPY                 | 246 |
| 24 x 60            | SCN-2460-6PPY                | 196 | SC-2460-6PPY                | 228 | SC2-2460-6PPY                 | 266 |
| 30 x 48            | SCN-3048-6PPY                | 196 | SC-3048-6PPY                | 230 | SC2-3048-6PPY                 | 267 |
| 30 x 60            | SCN-3060-6PPY                | 245 | SC-3060-6PPY                | 275 | SC2-3060-6PPY                 | 320 |
| 36 x 60            | SCN-3660-6PPY                | 292 | SC-3660-6PPY                | 345 | SC2-3660-6PPY                 | 420 |
| 36 x 72            | SCN-3672-6PPY                | 350 | SC-3672-6PPY                | 392 | SC2-3672-6PPY                 | 451 |

\* Note: For Outside Dimensions- Depth add 3", Width add 1"



Model  
SC-A-3048-6PPY

## Adjustable Shelf Models

Mobile Storage Locker with one center shelf, adjustable on 3-1/2" centers. Shelf is also removable.

| Interior*<br>D x W | Model No.      | Wt. |
|--------------------|----------------|-----|
| 24 x 48            | SC-A-2448-6PPY | 242 |
| 24 x 60            | SC-A-2460-6PPY | 252 |
| 30 x 48            | SC-A-3048-6PPY | 258 |
| 30 x 60            | SC-A-3060-6PPY | 303 |

\* Note: For Outside Dimensions- Depth add 3", Width add 1"



Model  
SCN-3048-10SR

## Job Site Security Box

Heavy-duty security locker with 10" solid rubber tires permit easy rolling over rough surfaces such as construction sites or other less than perfect floors. Fully welded 1-1/2" angle frame and 13 gauge expanded metal secures your tools and supplies while providing good visibility. The doors open a full 270 degrees to allow complete access. Available with fixed height or adjustable height shelves. Padlockable slide latch keeps your items safe. Interior height 48", overall height 60". 1500 pounds total capacity.

| Interior*<br>D x W | No Center Shelf<br>Model No. | Wt. | 1 Center Shelf<br>Model No. | Wt. | 2 Center Shelves<br>Model No. | Wt. |
|--------------------|------------------------------|-----|-----------------------------|-----|-------------------------------|-----|
| 24 x 48            | SCN-2448-10SR                | 198 | SC-2448-10SR                | 228 | SC2-2448-10SR                 | 258 |
| 24 x 60            | SCN-2460-10SR                | 208 | SC-2460-10SR                | 240 | SC2-2460-10SR                 | 278 |
| 30 x 48            | SCN-3048-10SR                | 208 | SC-3048-10SR                | 242 | SC2-3048-10SR                 | 279 |

\* Note: For Outside Dimensions- Depth add 3", Width add 1"

## Adjustable Shelf Models

| Interior*<br>D x W | Model No.      | Wt. |
|--------------------|----------------|-----|
| 24 x 48            | SC-A-2448-10SR | 254 |
| 24 x 60            | SC-A-2460-10SR | 264 |
| 30 x 48            | SC-A-3048-10SR | 270 |

\* Note: For Outside Dimensions- Depth add 3", Width add 1"

Model  
SC-A-3048-10SR







## Security Box Truck

1200 lbs. to 3600 lbs. Capacity

Heavy-duty all-welded 1-1/2" angle frame with 13 gauge expanded metal panels provide a durable truck to secure and transport your materials or cargo. Expanded metal sides and top allows easy visibility of contents. Double-hinged top cover has padlock hasp for added security. Front drop-gate with spring latches provide easy access. Interior height - 36". Choose wheels based on rolling surface and capacity required. Available in 6" non-marking polyurethane, 9" pneumatic, and 10" solid rubber.



Model  
SB-2448-10SR



Model  
SB-2448-6PY

|           | 6" x 2" POLYURETHANE<br>3600 lbs. Capacity<br>47" OAH |     | 9" x 3" PNEUMATIC<br>1200 lbs. Capacity<br>51" OAH |     | 10" x 2-3/4" SOLID RUBBER<br>1500 lbs. Capacity<br>51-1/2" OAH |     |
|-----------|---|-----|--|-----|--|-----|
| Deck Size | Model No.   | Wt. | Model No.  | Wt. | Model No.  | Wt. |
| 24 x 48   | SB-2448-6PY   | 173 | SB-2448-9P   | 176 | SB-2448-10SR   | 185 |
| 24 x 60   | SB-2460-6PY   | 195 | SB-2460-9P   | 198 | SB-2460-10SR   | 207 |
| 30 x 48   | SB-3048-6PY   | 196 | SB-3048-9P   | 199 | SB-3048-10SR   | 208 |
| 30 x 60   | SB-3060-6PY   | 220 | SB-3060-9P   | 223 | SB-3060-10SR   | 232 |

## Security Box Truck with Solid Sides

Heavy-duty all-welded 1-1/2" angle frame with 14 gauge all-welded steel construction protects your items from view and offers complete security. Drop gate front permits easy access to contents. User friendly double hinge cover folds down and back. Padlock hasp provides extra security. Interior height of 36". For rolling over smooth surfaces choose the 6" x 2" mold-on rubber wheels. For rolling over rough surfaces the 10" solid rubber version is the perfect choice.



Model  
SBS-2448-10SR



Model  
SBS-2448-6MR

|           | 6" x 2" MOLD-ON RUBBER<br>2000 lbs. Capacity |     | 10" x 2-3/4" SOLID RUBBER<br>1500 lbs. Capacity |     |
|-----------|--|-----|---|-----|
| Deck Size | Model No.                                    | Wt. | Model No.                                       | Wt. |
| 24 x 48   | SBS-2448-6MR                                 | 272 | SBS-2448-10SR                                   | 284 |
| 30 x 60   | SBS-3060-6MR                                 | 349 | SBS-3060-10SR                                   | 361 |



**Model  
CA-2448-6MR  
with Optional Drop-Gate**



**Drop-Gate open**

## Removable Drop-Gate Truck

**2000 lbs. Capacity**

3-Sided bulk handling truck converts into a 4 sided box truck with the addition of a removable half "Drop-Gate" panel. Hinged in the center, it can easily be lowered to provide better access while loading or unloading, or raised and latched to secure contents for transport or storage. Expanded metal sides allow better visibility and airflow. Interior height 36" above deck. Available with and without drop gate panel. 2 swivel, 2 rigid, 6" x 2" mold-on rubber casters.



**Drop-Gate removed**

| Size    | TRUCK ONLY<br>Model No. | Wt. | REMOVABLE<br>DROP-GATE PANEL | Wt. | TRUCK WITH REMOVABLE<br>DROP-GATE PANEL | Wt. |
|---------|-------------------------|-----|------------------------------|-----|---|-----|
| 24 x 48 | CA-2448-6MR             | 142 | CA-RD48-PNL                  | 26  | CARD-2448-6MR                           | 168 |
| 24 x 60 | CA-2460-6MR             | 162 | CA-RD60-PNL                  | 31  | CARD-2460-6MR                           | 193 |
| 30 x 48 | CA-3048-6MR             | 162 | CA-RD48-PNL                  | 26  | CARD-3048-6MR                           | 188 |
| 30 x 60 | CA-3060-6MR             | 177 | CA-RD60-PNL                  | 31  | CARD-3060-6MR                           | 208 |

For 8" x 2" Mold-on Rubber Casters, use wheel code: **-8MR** (2400 lbs. Capacity)

For 8" x 2" Polyurethane Casters, use wheel code: **-8PY** (3600 lbs. Capacity)



**Model  
CAWD-2448-6PY**

## Welded Drop Gate Truck

**3600 lbs. Capacity**

Ideal for transporting or staging of bulkier materials. All models have a 12 gauge reinforced deck, and 2 swivel, 2 rigid 6" polyurethane casters with a pushbar handle on the swivel caster end. These all-welded units have a powder coated finish and ship fully assembled. Side panels are 13 gauge flattened expanded metal with 1-1/2" angle iron corners and top edge. Front drop-gate with spring latches provide easy access. Interior height - 36" above deck.

| Size    | Model No.     | Wt. |
|---------|---------------|-----|
| 24 x 48 | CAWD-2448-6PY | 160 |
| 24 x 60 | CAWD-2460-6PY | 185 |
| 30 x 48 | CAWD-3048-6PY | 180 |
| 30 x 60 | CAWD-3060-6PY | 200 |



## 3-Sided Bulk Trucks

Ideal for transporting or staging of bulkier materials. All models have a 12 gauge reinforced deck, and 2 swivel, 2 rigid casters with a pushbar handle on swivel caster end. All-welded units have a powder coated finish and ship fully assembled.

### MESH SIDES

13 gauge flattened expanded metal with 1-1/2" angle iron corners and top trim. Available in two heights.

| Deck Size D x W            | Model No.   | Wt.  | Model No.    | Wt.  |  |
|----------------------------|-------------|--|--------------|--|--|
| <b>36" Interior Height</b> |             | <b>8" x 2" Mold-On Rubber<br/>2400 lbs. Cap.</b> |              | <b>8" x 2" Polyurethane<br/>3600 lbs. Cap.</b> |  |
| 24 x 48                    | CA-2448-8MR | 150  | CA-2448-8PPY | 140  |  |
| 24 x 60                    | CA-2460-8MR | 169  | CA-2460-8PPY | 159  |  |
| 30 x 48                    | CA-3048-8MR | 170  | CA-3048-8PPY | 160  |  |
| 30 x 60                    | CA-3060-8MR | 185  | CA-3060-8PPY | 175  |  |
| <b>48" Interior Height</b> |             | <b>6" x 2" Mold-On Rubber<br/>2000 lbs. Cap.</b> |              | <b>6" x 2" Polyurethane<br/>3600 lbs. Cap.</b> |  |
| 24 x 48                    | T1-2448-6MR | 147  | T1-2448-6PY  | 139  |  |
| 24 x 60                    | T1-2460-6MR | 163  | T1-2460-6PY  | 155  |  |
| 30 x 48                    | T1-3048-6MR | 165  | T1-3048-6PY  | 157  |  |
| 30 x 60                    | T1-3060-6MR | 182  | T1-3060-6PY  | 174  |  |



Mesh Sides

### TUBULAR STEEL SIDES

48" interior height, 1.05" O.D. x 14 gauge round steel tubing.

| Deck Size D x W | Model No.   | Wt.  | Model No.    | Wt.  |  |
|-----------------|-------------|--|--------------|--|--|
|                 |             | <b>6" x 2" Mold-On Rubber<br/>2000 lbs. Cap.</b> |              | <b>6" x 2" Polyurethane<br/>3600 lbs. Cap.</b> |  |
| 24 x 36         | OT-2436-6MR | 118  | OT-2436-6PPY | 108  |  |
| 24 x 48         | OT-2448-6MR | 136  | OT-2448-6PPY | 126  |  |
| 24 x 60         | OT-2460-6MR | 153  | OT-2460-6PPY | 143  |  |
| 30 x 48         | OT-3048-6MR | 149  | OT-3048-6PPY | 139  |  |
| 30 x 60         | OT-3060-6MR | 167  | OT-3060-6PPY | 157  |  |



Tubular Sides

### SLAT-TYPE SIDES

48" interior height, 1-1/2" x 3/16" slats.

| Deck Size D x W | Model No.   | Wt.  | Model No.   | Wt.  |  |
|-----------------|-------------|--|-------------|--|--|
|                 |             | <b>6" x 2" Mold-On Rubber<br/>2000 lbs. Cap.</b> |             | <b>6" x 2" Polyurethane<br/>3600 lbs. Cap.</b> |  |
| 24 x 48         | S1-2448-6MR | 164  | S1-2448-6PY | 156  |  |
| 24 x 60         | S1-2460-6MR | 182  | S1-2460-6PY | 174  |  |
| 30 x 48         | S1-3048-6MR | 190  | S1-3048-6PY | 182  |  |
| 30 x 60         | S1-3060-6MR | 216  | S1-3060-6PY | 208  |  |



Slat-Type Sides

### SOLID SIDES

48" interior height, 14 gauge solid steel with 1-1/2" angle iron corners and top edge.

| Deck Size D x W | Model No.   | Wt.  | Model No.   | Wt.  |  |
|-----------------|-------------|--|-------------|--|--|
|                 |             | <b>6" x 2" Mold-On Rubber<br/>2000 lbs. Cap.</b> |             | <b>6" x 2" Polyurethane<br/>3600 lbs. Cap.</b> |  |
| 24 x 48         | B1-2448-6MR | 219  | B1-2448-6PY | 211  |  |
| 24 x 60         | B1-2460-6MR | 244  | B1-2460-6PY | 236  |  |
| 30 x 48         | B1-3048-6MR | 246  | B1-3048-6PY | 238  |  |
| 30 x 60         | B1-3060-6MR | 273  | B1-3060-6PY | 265  |  |



Solid Sides





**Model**  
**T3-3060-6PY**  
**3 Shelf with Mesh Sides**

## 3-Sided Shelf Trucks

Heavy 12 gauge shelves are enclosed on 3 sides, 48" high above the deck in sturdy 1-1/2" angle iron corners and top trim. Mesh sides and slat-type sides allow visibility and air circulation, while solid sides offer more durability. 2 swivel, 2 rigid 6" x 2" polyurethane casters with 3600 lbs. capacity. Overall height 57".

**MESH SIDES** - 13 gauge flattened expanded metal

**SLAT-TYPE SIDES** - 1-1/2" x 3/16" slats

**SOLID SIDES** - 14 gauge sheet steel

|                    | SIZE<br>W x L | 2 SHELVES<br>22-1/2" Clearance<br>Model No. | Wt. | 3 SHELVES<br>15" Clearance<br>Model No. | Wt. |
|--------------------|---------------|---|-----|---|-----|
| <b>Mesh Sides</b>  | 24 x 48       | T2-2448-6PY                                 | 173 | T3-2448-6PY                             | 219 |
|                    | 24 x 60       | T2-2460-6PY                                 | 198 | T3-2460-6PY                             | 250 |
|                    | 30 x 48       | T2-3048-6PY                                 | 200 | T3-3048-6PY                             | 251 |
|                    | 30 x 60       | T2-3060-6PY                                 | 229 | T3-3060-6PY                             | 293 |
| <b>Slat Sides</b>  | 24 x 48       | S2-2448-6PY                                 | 198 | S3-2448-6PY                             | 234 |
|                    | 24 x 60       | S2-2460-6PY                                 | 226 | S3-2460-6PY                             | 272 |
|                    | 30 x 48       | S2-3048-6PY                                 | 233 | S3-3048-6PY                             | 274 |
|                    | 30 x 60       | S2-3060-6PY                                 | 267 | S3-3060-6PY                             | 319 |
| <b>Solid Sides</b> | 24 x 48       | B2-2448-6PY                                 | 253 | B3-2448-6PY                             | 295 |
|                    | 24 x 60       | B2-2460-6PY                                 | 288 | B3-2460-6PY                             | 340 |
|                    | 30 x 48       | B2-3048-6PY                                 | 290 | B3-3048-6PY                             | 342 |
|                    | 30 x 60       | B2-3060-6PY                                 | 328 | B3-3060-6PY                             | 392 |

For 6" x 2" Mold-on Rubber Casters, use wheel code: **-6MR** (2000 lbs. Capacity)



**Model**  
**T3-2448-6PYFP60**


## Forkliftable Order Picking Truck

**3600 lbs. Capacity**

Large capacity, three shelf truck designed to securely attach to your order picker. Two full width fork pockets on 24" centers and 1-1/2" steel grab bar make attachment easy. Shelves have 19" clearance. Overall height is 69". 2 rigid and 2 swivel 6" polyurethane casters assure smooth rolling, even with a full load of 3600 lbs. 48" length allows the unit to fit down any aisle!

| Size<br>W x L | Model No.       | Wt. |
|---------------|-----------------|-----|
| 24 x 48       | T3-2448-6PYFP60 | 258 |
| 30 x 48       | T3-3048-6PYFP60 | 295 |





## 3-Sided Adjustable Shelf Trucks

3600 lbs. Capacity

Expanded metal on 3 sides extends 48" high above deck to help contain loads and improve visibility and airflow. Upper shelf is adjustable on 3-1/2" centers for versatility, and can be positioned with 1-1/2" lips either up or down. Shelves are 12 gauge steel. 3600 lbs. overall capacity with non-marking, long-lasting 6" x 2" polyurethane casters, 2 swivel, 2 rigid. Overall height is 57". Additional factory installed adjustable shelves are also available.

|                    | DECK SIZE W x L | Model No.     | Wt. |
|--------------------|-----------------|---------------|-----|
| <b>Mesh Sides</b>  | 24 x 48         | T2-A-2448-6PY | 203 |
|                    | 24 x 60         | T2-A-2460-6PY | 228 |
|                    | 30 x 48         | T2-A-3048-6PY | 230 |
|                    | 30 x 60         | T2-A-3060-6PY | 259 |
| <b>Slat Sides</b>  | 24 x 48         | S2-A-2448-6PY | 218 |
|                    | 24 x 60         | S2-A-2460-6PY | 256 |
|                    | 30 x 48         | S2-A-3048-6PY | 263 |
|                    | 30 x 60         | S2-A-3060-6PY | 297 |
| <b>Solid Sides</b> | 24 x 48         | B2-A-2448-6PY | 283 |
|                    | 24 x 60         | B2-A-2460-6PY | 318 |
|                    | 30 x 48         | B2-A-3048-6PY | 320 |
|                    | 30 x 60         | B2-A-3060-6PY | 358 |

For 6" x 2" Mold-on Rubber Casters, use wheel code: **-6MR**  
(2000 lbs. Capacity)



Model  
T2-A-3060-6PY

## Drop-Shelf Trucks

3600 lbs. Capacity

3-sided truck converts in seconds. Upper shelf drops down and out of the way to make room for extra large items, or it can be removed completely. Sides extend 48" above deck, with drop-shelf positioned 30" above deck. Rolls easily on 6" x 2" non-marking polyurethane casters, 2 swivel and 2 rigid. 3600 lbs. capacity.

**MESH SIDES** - 13 gauge flattened expanded metal

**SLAT-TYPE SIDES** - 1-1/2" x 3/16" slats

**SOLID SIDES** - 14 gauge solid steel

|                    | DECK SIZE W x L | SHELF SIZE W x L | Model No.      | Wt. |
|--------------------|-----------------|------------------|----------------|-----|
| <b>Mesh Sides</b>  | 24 x 48         | 21 x 44          | T1-2448-6PY-DS | 181 |
|                    | 24 x 60         | 21 x 56          | T1-2460-6PY-DS | 206 |
|                    | 30 x 48         | 27 x 44          | T1-3048-6PY-DS | 209 |
|                    | 30 x 60         | 27 x 56          | T1-3060-6PY-DS | 237 |
| <b>Slat Sides</b>  | 24 x 48         | 21 x 44          | S1-2448-6PY-DS | 198 |
|                    | 24 x 60         | 21 x 56          | S1-2460-6PY-DS | 225 |
|                    | 30 x 48         | 27 x 44          | S1-3048-6PY-DS | 234 |
|                    | 30 x 60         | 27 x 56          | S1-3060-6PY-DS | 271 |
| <b>Solid Sides</b> | 24 x 48         | 21 x 44          | B1-2448-6PY-DS | 253 |
|                    | 24 x 60         | 21 x 56          | B1-2460-6PY-DS | 287 |
|                    | 30 x 48         | 27 x 44          | B1-3048-6PY-DS | 290 |
|                    | 30 x 60         | 27 x 56          | B1-3060-6PY-DS | 328 |

For 6" x 2" Mold-on Rubber Casters, use wheel code: **-6MR**  
(2000 lbs. Capacity)



Model  
T1-3060-6PY-DS



Release slide bolts to drop upper shelf down and out of the way



Shelf in raised position



Model  
DET4-2448-6PY

## 2-Sided Shelf Trucks

3600 lbs. Capacity

Expanded metal ends improve visibility, allow 2-way access to material. End panels extend 48" high above deck. All-welded construction with 12 gauge steel shelves. Available in 2, 3 or 4 shelf configurations. Non-marking, quiet 6" polyurethane wheels, 2 swivel 2 rigid. Overall height 57". Capacity 3600 lbs.

| SHELF SIZE | 2 SHELVES<br>22-1/2" Clearance<br>Model No. | Wt. | 3 SHELVES<br>15" Clearance<br>Model No. | Wt. | 4 SHELVES<br>12" Clearance<br>Model No. | Wt. |
|------------|---|-----|---|-----|---|-----|
| 24 x 48    | DET2-2448-6PY                               | 154 | DET3-2448-6PY                           | 196 | DET4-2448-6PY                           | 238 |
| 24 x 60    | DET2-2460-6PY                               | 175 | DET3-2460-6PY                           | 217 | DET4-2460-6PY                           | 269 |
| 30 x 48    | DET2-3048-6PY                               | 178 | DET3-3048-6PY                           | 229 | DET4-3048-6PY                           | 281 |
| 30 x 60    | DET2-3060-6PY                               | 204 | DET3-3060-6PY                           | 268 | DET4-3060-6PY                           | 332 |

For 6" x 2" Mold-on Rubber Casters, use wheel code: **-6MR** (2000 lbs. Capacity)



Model  
DET2-A-2448-6PY

## 2-Sided Adjustable Shelf Truck

3600 lbs. Capacity

Expanded metal ends extend 48" high above the deck, improve visibility, and allow 2-way access to material. All-welded construction with 12 gauge steel shelves. Standard truck has one upper shelf that is adjustable on 3-1/2" centers, and can be positioned with 1-1/2" lips either up or down. Additional adjustable shelves also available. 2 swivel and 2 rigid casters with quiet, non-marking 6" polyurethane wheels. Overall height 57". Capacity 3600 lbs.

| Size<br>W x D | Model No.       | Wt. | Additional Shelf<br>Model No. | Wt. |
|---------------|-----------------|-----|-------------------------------|-----|
| 24 x 48       | DET2-A-2448-6PY | 184 | SHLF-2447                     | 43  |
| 24 x 60       | DET2-A-2460-6PY | 205 | SHLF-2459                     | 53  |
| 30 x 48       | DET2-A-3048-6PY | 208 | SHLF-3047                     | 53  |
| 30 x 60       | DET2-A-3060-6PY | 234 | SHLF-3059                     | 65  |

For 6" x 2" Mold-on Rubber Casters, use wheel code: **-6MR** (2000 lbs. Capacity)



Model  
PPT-2848-6M

## Pick-Pack Truck

with sloped shelves and divider

1600 lbs. Capacity

Upper shelves are sloped, bottom shelf has 1-1/2" retaining lip. 14 gauge shelves have 14" shelf clearance. Diamond caster pattern with 6" x 2" Mold-On rubber casters, 1600 lbs. capacity.

| Size    | Model No.   | Shelf Size | Wt. |
|---------|-------------|------------|-----|
| 28 x 48 | PPT-2848-6M | 14 x 48    | 225 |
| 28 x 60 | PPT-2860-6M | 14 x 60    | 255 |



## High End Truck with Removable Shelf

**2000 lbs. Capacity**

Narrow 16" wide 12 gauge steel deck is perfect for narrow aisles. Each corner has 5" polyurethane swivel wheels. Two 8" center wheels allow the unit to pivot within its own radius. All wheels are non-marking polyurethane. Two removable handles extend 48" above the deck to contain taller loads. The shelf can be mounted in three different heights (7-1/2", 21-1/2", 35-1/2" from the deck) on the upright cross braces. Shelf capacity 200 lbs.

| Size    | Model No.  | Wt. |
|---------|------------|-----|
| 16 x 48 | HE-1648-RS | 127 |
| 16 x 60 | HE-1660-RS | 142 |



**Model HE-1660-RS**

## High End 6-Wheeled Shelf Truck

**2000 lbs. Capacity**

Narrow width is ideal for busy aisles and two shelves create twice the loading area! 12 gauge shelves have 24" clearance. Six wheel design is fully maneuverable with two 8" x 2" rigid center wheels and four 5" swivel corner wheels. Non-marking polyurethane tread prevents wheel marks on your floor. End panels extend 48" high for extra capacity and are constructed from 1-1/2" x 3/16" slats for extra visibility. Capacity 2000 lbs.

| Size    | Model No. | Wt. |
|---------|-----------|-----|
| 16 x 48 | HE2-1648  | 118 |
| 16 x 60 | HE2-1660  | 129 |
| 16 x 72 | HE2-1672  | 152 |
| 24 x 48 | HE2-2448  | 152 |
| 24 x 60 | HE2-2460  | 190 |



**Model HE2-2460**

## Narrow Aisle Order Picking Truck

**2000 lbs. Capacity**

Six wheel design creates a versatile two shelf truck that is perfect for use in warehouses and distribution centers where you need large capacity and zero turn maneuverability. The large writing shelf, measuring 21" wide and 12" deep, and storage pocket provide the work surface needed to fill out paperwork while picking orders. Constructed from 12 gauge steel and 1-1/2" angle, this workhorse is built to withstand the rigors of the most demanding facilities. The bottom shelf has 24" clearance and the end panels extend 48" above the deck. 8" rigid and 5" swivel non-marking polyurethane casters provide a smooth ride.

| Size    | Model No.    | Wt. |
|---------|--------------|-----|
| 24 x 48 | HE2-2448-WSP | 172 |
| 24 x 60 | HE2-2460-WSP | 210 |



**Model HE2-2460-WSP**





**3-Sided Model**  
**RP3S-2436-5PY**



**4-Sided Model**  
**RP4X-1832-5PY**

## Raised Platform Box Trucks

Raised 12 gauge steel platform is 20" high to help minimize bending. Sides extend 20" high above the deck to help contain those big loads and small parts. All-welded construction ships fully assembled and ready for immediate use. 2 swivel, 2 rigid casters with non-marking polyurethane wheels.

**1200 lbs. Capacity** – 5" ball bearing wheels

**2000 lbs. Capacity** – 6" roller bearing wheels

### SOLID SIDES

14 gauge steel sides.

| Platform Size | Capacity  | 3-SIDED MODEL |     | 4-SIDED MODEL |     |
|---------------|-----------|---------------|-----|---------------|-----|
|               |           | Model         | Wt. | Model         | Wt. |
| 18 x 32       | 1200 lbs. | RP3S-1832-5PY | 94  | RP4S-1832-5PY | 109 |
| 24 x 36       | 1200 lbs. | RP3S-2436-5PY | 114 | RP4S-2436-5PY | 133 |
| 24 x 48       | 1200 lbs. | RP3S-2448-5PY | 134 | RP4S-2448-5PY | 154 |
| 24 x 36       | 2000 lbs. | RP3S-2436-6PY | 124 | RP4S-2436-6PY | 143 |
| 24 x 48       | 2000 lbs. | RP3S-2448-6PY | 134 | RP4S-2448-6PY | 154 |
| 30 x 48       | 2000 lbs. | RP3S-3048-6PY | 175 | RP4S-3048-6PY | 195 |
| 30 x 60       | 2000 lbs. | RP3S-3060-6PY | 198 | RP4S-3060-6PY | 224 |

### EXPANDED METAL SIDES

3/4" expanded metal sides for greater visibility and airflow.

| Platform Size | Capacity  | 3-SIDED MODEL |     | 4-SIDED MODEL |     |
|---------------|-----------|---------------|-----|---------------|-----|
|               |           | Model         | Wt. | Model         | Wt. |
| 18 x 32       | 1200 lbs. | RP3X-1832-5PY | 73  | RP4X-1832-5PY | 78  |
| 24 x 36       | 1200 lbs. | RP3X-2436-5PY | 93  | RP4X-2436-5PY | 100 |
| 24 x 48       | 1200 lbs. | RP3X-2448-5PY | 120 | RP4X-2448-5PY | 128 |
| 24 x 36       | 2000 lbs. | RP3X-2436-6PY | 102 | RP4X-2436-6PY | 110 |
| 24 x 48       | 2000 lbs. | RP3X-2448-6PY | 124 | RP4X-2448-6PY | 132 |
| 30 x 48       | 2000 lbs. | RP3X-3048-6PY | 156 | RP4X-3048-6PY | 165 |

## Raised Platform Trucks with Drop-Gate

Hinged Drop-Gate provides easier access when loading and unloading. Spring latches secure gate in upright position to retain load. Raised 12 gauge platform is 20" high to minimize bending, and sides extend 20" above platform. 2000 lbs. capacity with 6" x 2" polyurethane casters, 2 swivel and 2 rigid.

### SOLID SIDES

14 gauge steel sides.

| Platform Size | Model No.     | Wt. |
|---------------|---------------|-----|
| 24 x 36       | RPDS-2436-6PY | 143 |
| 24 x 48       | RPDS-2448-6PY | 152 |
| 30 x 48       | RPDS-3048-6PY | 195 |

### EXPANDED METAL SIDES

3/4" expanded metal for greater visibility and airflow.

| Platform Size | Model No.     | Wt. |
|---------------|---------------|-----|
| 24 x 36       | RPDX-2436-6PY | 110 |
| 24 x 48       | RPDX-2448-6PY | 124 |
| 30 x 48       | RPDX-3048-6PY | 156 |



**Model**  
**RPDS-2436-6PY**



**Model**  
**RPDX-2436-6PY**



## Box Trucks

2000 lbs. Capacity

Bulk storage and transport trucks have 24" interior height. Overall height is 32" with 6" x 2" mold-on rubber casters, 2 swivel and 2 rigid.

### SHEET STEEL TRUCKS

14 gauge steel sides in angle iron frame.

| Deck Size | Model No.   | Wt. |
|-----------|-------------|-----|
| 24 x 36   | BTS2436-6MR | 149 |
| 24 x 48   | BTS2448-6MR | 175 |
| 30 x 48   | BTS3048-6MR | 192 |
| 30 x 60   | BTS3060-6MR | 217 |



Model  
BTS2436-6MR



Model  
BTX2436-6MR

### EXPANDED METAL TRUCKS

Angle iron frame with 3/4" expanded metal sides for greater visibility and airflow.

| Deck Size | Model No.   | Wt. |
|-----------|-------------|-----|
| 24 x 36   | BTX2436-6MR | 101 |
| 24 x 48   | BTX2448-6MR | 117 |
| 30 x 48   | BTX3048-6MR | 130 |
| 30 x 60   | BTX3060-6MR | 145 |

## Box Trucks with Hinged Lid

2000 lbs. Capacity

Bulk storage and transport trucks have 24" interior height. Double-hinged top cover has padlock hasp for security. Overall height is 33-1/2" with 6" x 2" mold-on rubber casters, 2 swivel and 2 rigid. 2000 lbs. capacity.

### SHEET STEEL TRUCKS

14 gauge steel sides in angle iron frame provides maximum durability.

| Deck Size | Model No.    | Wt. |
|-----------|--------------|-----|
| 24 x 36   | BTSL2436-6MR | 173 |
| 24 x 48   | BTSL2448-6MR | 206 |
| 30 x 48   | BTSL3048-6MR | 230 |
| 30 x 60   | BTSL3060-6MR | 264 |



Model  
BTSL2436-6MR

### EXPANDED METAL TRUCKS

Angle iron frame with 3/4" expanded metal sides for greater visibility and airflow.

| Deck Size | Model No.    | Wt. |
|-----------|--------------|-----|
| 24 x 36   | BTXL2436-6MR | 117 |
| 24 x 48   | BTXL2448-6MR | 139 |
| 30 x 48   | BTXL3048-6MR | 155 |
| 30 x 60   | BTXL3060-6MR | 174 |



Model  
BTXL2436-6MR



**Model**  
**HT-4857-6PH**

## Low-Profile Hopper Truck – 12” Deep

**2000 lbs. Capacity**

All-welded construction. Angled “scoop” side allows for use under machinery. Designed to catch chips, cutoff, and scraps produced by metalworking. Two swivel, two rigid casters with 6” x 2” phenolic wheels allow for smoother rolling of heavy loads. Hopper height is 20”. Removable handle is 40” high. Powder coated finish.

| Overall<br>W x D x H* | Model No.   | Wt. |
|-----------------------|-------------|-----|
| 48 x 59 x 20          | HT-4857-6PH | 206 |

\* Includes handle pockets, but does not include handle dimensions.



**Model**  
**HT-3651-6PH**

## Low-Profile Hopper Truck – 16” Deep

**2000 lbs. Capacity**

All-welded construction. Angled “scoop” side allows for use under machinery. Designed to catch chips, cutoff, and scraps produced by metalworking. Hopper height is 24”. Removable handle is 40” high, and can be placed on either of the three sides. Four swivel casters with 6” x 2” phenolic wheels for maneuverability under equipment overhangs/under machinery. Powder coated finish.

| Overall<br>W x D x H* | Model No.   | Wt. |
|-----------------------|-------------|-----|
| 54 x 38 x 24          | HT-3651-6PH | 183 |

\* Includes handle pockets, but does not include handle dimensions.



**Model**  
**HT-2751-6PY**

## Hopper Truck

**2000 lbs. Capacity**

14 gauge, fully welded, leakproof construction. 3/4 cubic yard capacity. 2 rigid and 2 swivel casters with 6” polyurethane wheels provide a smooth rolling truck even when fully loaded. Top edge is reinforced with 1” angle for extra durability. 3/16” thick dumping knees offer two step dumping action. Two 1” diameter handles won’t cut into your operators’ hands when lifting. Heavy-duty gray powder coated finish.

| Overall<br>W x D x H | Model No.   | Wt. |
|----------------------|-------------|-----|
| 27 x 56-3/4 x 40-5/8 | HT-2751-6PY | 149 |

## WELDED STEEL Mobile Storage Bins

Heavy-Duty, all-welded 12 gauge steel construction with powder coated finish for rugged durability. Built with an open hopper front, each level has overall dimensions of 12-1/2"H x 15"D x 32"W. Available with up to 4 permanent storage compartments per level. Heavy 6" x 2" swivel casters with hard tread phenolic wheels for ease of movement. Mobile units allow you to bring the parts to the workspace or reposition with changing requirements.

Overall Dimensions: 32" wide x 45-1/2" high x 20" deep. 800 lbs. capacity per tier. 2400 lbs. overall capacity



MS2-1532-6PH

| Model No.    | Openings per Level | Total Openings | OPENING SIZE |         |     | Wt. |
|--------------|--------------------|----------------|--------------|---------|-----|-----|
|              |                    |                | W            | H       | D   |     |
| MS1-1532-6PH | 1                  | 3              | 32"          | 12-1/2" | 15" | 210 |
| MS2-1532-6PH | 2                  | 6              | 16"          | 12-1/2" | 15" | 217 |
| MS3-1532-6PH | 3                  | 9              | 10-1/2"      | 12-1/2" | 15" | 235 |
| MS4-1532-6PH | 4                  | 12             | 8"           | 12-1/2" | 15" | 252 |



MS1-1532-6PH



MS3-1532-6PH



MS4-1532-6PH

## Stationary Storage Bins

Same heavy-duty construction as our popular Mobile Storage Bins, now in a stationary version. All welded 12 gauge steel bins with durable gray powder coated finish. The stationary versions have Fork Pockets to allow easy transport and positioning without having to empty the bins. Fork pockets with 8" x 4" opening are designed for use with either a fork truck or a standard pallet jack.

Available with 1, 2, 3, or 4 compartments per level. Overall dimensions 32" wide x 42" high x 20" deep. Shelf capacity - 800 lbs. Total Capacity - 2400 lbs.



MS3-1532-FP

| Model No.   | Openings per Level | Total Openings | OPENING SIZE |         |     | Wt. |
|-------------|--------------------|----------------|--------------|---------|-----|-----|
|             |                    |                | W            | H       | D   |     |
| MS1-1532-FP | 1                  | 3              | 32"          | 12-1/2" | 15" | 206 |
| MS2-1532-FP | 2                  | 6              | 16"          | 12-1/2" | 15" | 213 |
| MS3-1532-FP | 3                  | 9              | 10-1/2"      | 12-1/2" | 15" | 231 |
| MS4-1532-FP | 4                  | 12             | 8"           | 12-1/2" | 15" | 248 |



MS1-1532-FP



MS2-1532-FP



MS4-1532-FP

## Sloped Shelf Bin Cart

Store, organize and transport your bins (not included) with this dual-sided bin transport cart. Heavy-duty, all-welded construction. The 14 gauge solid steel shelves with 1-1/2" retaining lips are sloped at a 15° angle. The shelves are 35-1/2" wide and will accommodate bins up to 11-7/8" deep and 8" high. Shelf clearance is 8-1/4". 6 shelves on each side for a combined total of 12 shelves. 2 swivel, 2 rigid 6" non-marking polyurethane casters.

| Size    | Model No.    | Wt. |
|---------|--------------|-----|
| 30 x 60 | 6BC-3036-6PY | 367 |


 6BC-3036-6PY  
Bins not included






**Model  
RT4-8S**

## Wire Reel Caddy

All-welded Wire Reel Caddy has four 16" wide rods for holding multiple wire reel configurations. Top 3 rods are 7" on-center. Wheels are off the ground while standing so it does not "walk" while pulling wire. Full width handle. Convenient tool tray for storage and transport of hand-tools. Heavy-duty angle iron frame. Wheels are 8" x 2-1/2" solid rubber with ball bearings. Durable powder coated gray finish. Ships via UPS!

| Overall<br>W x D x H    | Model No. | Wt. |
|-------------------------|-----------|-----|
| 8-1/2 x 18-1/2 x 45-1/2 | RT4-8S    | 54  |



**Model  
RT3-12P**

## Heavy-Duty Reel Caddy

**1000 lbs. Capacity**

Three (3) heavy-duty steel spindles are 1" diameter bar stock secured with set screws, and will accept reels up to 12" diameter and 21" wide. For larger diameter spools, simply remove 1 or more of the spindles. Large 12" diameter pneumatic wheels have roller bearings for transporting over rough surfaces. Save space, use and store vertically or horizontally. Capacity 150 lbs. per spindle. Three wire guides for dispensing. Convenient top tray measures 10" x 24". Welded unit has a powder coated finish and ships set up and ready for immediate use.

| Overall<br>W x D x H | Model No. | Wt. |
|----------------------|-----------|-----|
| 36 x 31 x 45         | RT3-12P   | 90  |

## All-Welded Wire Reel Rack

Sturdy welded steel reel storage rack features 3 levels. The two upper levels each have three 5/8" dia. spindles, and the lower level includes a single 1" diameter spindle and two 5/8" diameter spindles. Each spindle has 33" of useable width. 150 lbs. capacity per spindle. Welded construction means no assembly. Removable wire guides. Footpads have lag holes to secure to floor. Powder coated finish.



**Model  
RR-3036**

| Overall<br>W x D x H | Model No. | Wt. |
|----------------------|-----------|-----|
| 36 x 30 x 72         | RR-3036   | 178 |



## ELECTRICIAN'S Wire Reel Cart

All-welded Electrician's Cart carries everything you need for a wiring project. Supplied with five 36" long spool holder rods for numerous wire reel configurations. Heavy 12 gauge steel shelves have a 1-1/2" lip to retain small parts. Top shelf 24" wide x 36" long x 35" high. Bottom shelf measures 24" wide x 48", providing a 12" extension for upright storage and transport of conduit or other long material. Hanger bar on side of cart for convenient ladder storage. Casters are 5" polyurethane, 2 swivel with total-lock wheel brakes and 2 rigid. Overall length is 54". Durable powder coated gray finish. Ships assembled.

| Model No.    | Wt. |
|--------------|-----|
| RC2448-5PYTL | 139 |

### Wire Reel Cart with Drawers

Includes two locking storage drawers and 3 spool holder rods 36" long. Drawers have cylinder locks with 2 keys, and each measure 13" wide x 17" long x 4-1/2" high inside.

| Model No.       | Wt. |
|-----------------|-----|
| RC2448-5PYTL2DR | 175 |



Model  
RC2448-5PYTL



Model  
RC2448-5PYTL2DR

## Wire Reel Cart with Cabinet

All-welded Electrician's Cart carries everything you need for a wiring project. Supplied with five 15" long spool holder rods to allow numerous wire reel configurations. Heavy 12 gauge steel shelves have a 1-1/2" lip to retain small parts. Top shelf is 24"W x 36"L x 35"H. Storage cabinet with locking door and keyed handle measures 16"W x 23"D x 25"H. Bottom shelf measures 24"W with a 12" extension for upright storage and transport of conduit or other long material. Hanger bar on side of cart for convenient ladder storage. Casters are 5" polyurethane, 2 swivel and 2 rigid. Swivel casters feature total lock wheel brake, that locks both the swivel and the wheel. Overall length is 54". Durable powder coated gray finish.

| Model No.     | Wt. |
|---------------|-----|
| RCM2448-5PYTL | 152 |



Model  
RCM2448-5PYTL

## Maintenance Cart with Cabinet and Drawers

1200 lbs. Capacity

All-welded 12 gauge construction. Top work surface measures 24" x 36" and features a front flush edge and 1-1/2" retaining lips on sides and back. 4 locking storage drawers measuring 13"W x 17"L x 4-1/2"H. 27" high enclosed cabinet with locking door. 12" extension on the bottom is perfect for upright storage and transport of long material. Hanger bar on back side of cart for convenient ladder storage. 2 rigid, 2 swivel 5" non-marking polyurethane casters feature a total lock wheel brake that locks both the swivel and the wheel. Overall length is 54". Durable powder coated gray finish.

| Model No.      | Wt. |
|----------------|-----|
| RCM2448-TL-4DR | 236 |



Model  
RCM2448-TL-4DR



**Double Sided  
with Pegboard,  
Shelves, and Tray**



**Single Sided  
AFS-2440-6PH**



**DOUBLE Sided  
AFS-3640-6PH**



**AF-ARM**  
4 attachments shown

## Adjustable Tray A-Frame Shelf Trucks

2000 lbs. Capacity

Use in your Lean Manufacturing facility to transport and store components or finished products where and when you need them. Slotted steel uprights accept shelves, arms, trays, and pegboard panels making this a versatile ergonomic product. Mix and match to fit your exact requirements. Since it is adjustable you can reconfigure the truck as your needs change. Available as a single sided or double sided unit. All-welded construction with a durable powder coat finish and 2 rigid and 2 swivel 6" phenolic wheels.

| A-Frame                       | W x D x H    | Model No.     | Wt. |
|-------------------------------|--------------|---------------|-----|
| Single-sided                  | 40 x 24 x 67 | AFS-2440-6PH  | 72  |
| Double-sided                  | 40 x 36 x 67 | AFS-3640-6PH  | 92  |
| Double-sided w/bottom shelves | 40 x 36 x 67 | AFSF-3640-6PH | 116 |

**9" DEEP TRAYS** are 3" high on 3 sides. Open front side available with a 1" lip, or flush edge.

**15" DEEP TRAYS** are 6" high on 3 sides with handles on both ends. Open front side available with 1" lip, or a flush edge.

**FLUSH SHELVES** have a 1-1/2" lip along the back, flush edge on 3 sides. Ideal for long and oversize items.

**PEGBOARD PANELS** are 16 gauge formed steel with holes on 1" centers to accept most common light and heavy-duty hooks. (Pegs and bins not included.)

**ROUND TUBING ARM ATTACHMENTS (AF-ARM)** are 1-1/4" OD, 8" inside length and adjustable on 3-1/2" increments. Perfect for carrying tubing and bar stock.

| Tray Model No. | W x D x H        | Front Edge | Max per frame |          | Wt. |
|----------------|------------------|------------|---------------|----------|-----|
|                |                  |            | 1-sided       | 2-sided  |     |
| AF-SHELF-9     | 36 x 9 x 3       | flush      | 8             | 16       | 25  |
| AF-SHELF-9-LU  | 36 x 9 x 3       | 1" lip     | 8             | 16       | 25  |
| AF-SHELF-15    | 36 x 15 x 6      | flush      | 5             | 10       | 33  |
| AF-SHELF-15-LU | 36 x 15 x 6      | 1" lip     | 5             | 10       | 33  |
| AF-SHELF-FLUSH | 36 x 15 x flush  | flush      | 16            | 32       | 19  |
| AF-PB          | 36 x 1 x 24      | NA         | 2             | 4        | 17  |
| AF-ARM*        | 8" inside length | -          | 7 pairs       | 14 pairs | 3   |

\* Order each individually

## Adjustable Shelf Rack

Configure this rack to your exact "lean manufacturing" requirements. Standard model includes two 15" deep x 36" wide shelves that are adjustable on 3-1/2" increments. Add optional accessories to customize the rack to fit your needs. The 9-1/4" high deck surface measures 9" deep x 42" across with 1" retaining lip. All-welded construction with 2 swivel and 2 rigid 6" phenolic wheels and powder coated surface.

| W x D x H    | Model No.    | Wt. |
|--------------|--------------|-----|
| 40 x 36 x 67 | ABS-3640-6PH | 154 |

### Additional Flush Shelves

1-1/2" lip along the back, flush edge on 3 sides. Ideal for long and oversize items.

| Model No.      | Wt. |
|----------------|-----|
| AF-SHELF-FLUSH | 19  |



**Model  
ABS-3640-6PH**





## Mobile Pegboard A Frame – Lean Tool Cart

**1200 lbs. Capacity**

Use in your Lean Manufacturing facility to transport and efficiently organize tools and equipment. Visually locate tools and items in seconds. Use tool shadowing on the pegboards to know immediately if a tool, accessory, or part is missing. The 16 gauge pegboard has holes on 1” centers that accepts most common light and heavy-duty hooks. Pegboards are 48” high. Overall height is 56”. This all-welded, heavy-duty, durable unit features a durable powder coated gray finish. Ships fully assembled. 2 rigid and 2 swivel 5” polyurethane wheels make it easy to safely transport your tools to the work area. (Pegs and bins not included.)

| Size    | Model No.     | Wt. |
|---------|---------------|-----|
| 24 x 36 | AFPB-2436-5PY | 124 |
| 24 x 48 | AFPB-2448-5PY | 157 |
| 24 x 60 | AFPB-2460-5PY | 190 |



**Model AFPB-2436-5PY**

## Mobile Pegboard A-Frame – 60” Tall

**1200 lbs. Capacity**

Efficiently organize, store and transport your tools with this Little Giant lean tool cart. 60” tall x 48” wide 16 gauge pegboard panels provide ample storage for all of your tools and feature holes on 1” centers and accept most common light and heavy-duty hooks. 5” non-marking polyurethane wheels with 2 rigid and 2 swivel casters with total lock brakes to keep the unit stationary. 68” Overall height. Available as a single or double-sided unit. (Pegs and bins not included)

| A-Frame      | Model No.       | Wt. |
|--------------|-----------------|-----|
| Single-sided | AFPB1S2448-TL60 | 107 |
| Double-sided | AFPB2S2448-TL60 | 163 |



**Model AFPB2S2448-TL60**

## Mobile Pegboard with Back Shelf Storage

**2000 lbs. Capacity**

Combine the great features of our 48” high A Frame Peg Board with 4 storage shelves on the back side to store larger parts or tools. Pegboard is 16 gauge steel with 1/4” dia holes. 2 rigid and 2 swivel casters with 6” polyurethane wheels mean smooth transport through your facility. A floor lock is mounted on the swivel caster end to securely position the unit. 60” overall height.

| Size    | Model No.       | Wt. |
|---------|-----------------|-----|
| 24 x 36 | AFPBS2436-6PYFL | 186 |
| 24 x 48 | AFPBS2448-6PYFL | 224 |
| 24 x 60 | AFPBS2460-6PYFL | 262 |



**Model AFPBS2436-6PYFL**



**Side view**



Model  
MHP3-2D-FL-LP



Model  
MBP2D-2448-FL



Model  
MJP2D-2448-HDFL



Model  
MMP2D2448-2DRFL

## VISIBLE CONTENT

### 48" Wide Mobile Bench Cabinets

#### 3600 lbs. Capacity

All-welded 12 gauge construction. Clearview doors secure contents with keyed handle and 3 point latching mechanism. The top work surface measures 24" x 48", is 41" high and is surrounded by retaining lip on three sides (except Butcher Block Top models). Available in 4 standard work top surfaces. 2 swivel, 2 rigid non marking Polyurethane wheels. Available with optional pegboard or louvered panel. Floor lock on the handle end securely positions the workbench. Durable powder coated gray finish.

## WITH FULL CENTER SHELF

Interior shelf clearance 13" high.

| Top Surface          | Without Louvered Panel |     | With Louvered Panel |     |
|----------------------|------------------------|-----|---------------------|-----|
|                      | Model No.              | Wt. | Model No.           | Wt. |
| Powder Coated Steel  | MBP3-2D-2448-FL        | 240 | MBP3-2D-FL-LP       | 263 |
| 1-3/4" Butcher Block | MJP3-2D-2448-FL        | 290 | MJP3-2D-FL-LP       | 313 |
| 1/4" Hardboard       | MHP3-2D-2448-FL        | 248 | MHP3-2D-FL-LP       | 271 |
| Non-Slip Vinyl       | MMP3-2D-2448-FL        | 244 | MMP3-2D-FL-LP       | 267 |

For Pegboard Panel, replace -LP with -PB

## WITHOUT CENTER SHELF

Cabinet interior height clearance 28".

| Top Surface          | Without Louvered Panel |     | With Louvered Panel |     |
|----------------------|------------------------|-----|---------------------|-----|
|                      | Model No.              | Wt. | Model No.           | Wt. |
| Powder Coated Steel  | MBP2D-2448-FL          | 210 | MBP2D-FL-LP         | 233 |
| 1-3/4" Butcher Block | MJP2D-2448-FL          | 260 | MJP2D-FL-LP         | 283 |
| 1/4" Hardboard       | MHP2D-2448-FL          | 218 | MHP2D-FL-LP         | 241 |
| Non-Slip Vinyl       | MMP2D-2448-FL          | 214 | MMP2D-FL-LP         | 237 |

For Pegboard Panel, replace -LP with -PB

## WITH HEAVY-DUTY DRAWER

Large 250 lb. capacity storage drawer measures 26"W x 20"D x 6"H and features a full-width recessed handle and a padlock hasp. Cabinet interior clearance 20" high.

| Top Surface          | Without Louvered Panel |     | With Louvered Panel |     |
|----------------------|------------------------|-----|---------------------|-----|
|                      | Model No.              | Wt. | Model No.           | Wt. |
| Powder Coated Steel  | MBP2D-2448-HDFL        | 249 | MBP2D-HDFL-LP       | 272 |
| 1-3/4" Butcher Block | MJP2D-2448-HDFL        | 299 | MJP2D-HDFL-LP       | 322 |
| 1/4" Hardboard       | MHP2D-2448-HDFL        | 257 | MHP2D-HDFL-LP       | 280 |
| Non-Slip Vinyl       | MMP2D-2448-HDFL        | 254 | MMP2D-HDFL-LP       | 277 |

For Pegboard Panel, replace -LP with -PB

## WITH DOUBLE STORAGE DRAWERS

2 storage drawers measuring 12" W x 17"D x 4-1/2"H with cylinder locks and keys. Cabinet interior clearance 21-1/2" high.

| Top Surface          | Without Louvered Panel |     | With Louvered Panel |     |
|----------------------|------------------------|-----|---------------------|-----|
|                      | Model No.              | Wt. | Model No.           | Wt. |
| Powder Coated Steel  | MBP2D-2448-2DRFL       | 233 | MBP2D-2DRFL-LP      | 256 |
| 1-3/4" Butcher Block | MJP2D-2448-2DRFL       | 283 | MJP2D-2DRFL-LP      | 306 |
| 1/4" Hardboard       | MHP2D-2448-2DRFL       | 241 | MHP2D-2DRFL-LP      | 264 |
| Non-Slip Vinyl       | MMP2D-2448-2DRFL       | 237 | MMP2D-2DRFL-LP      | 260 |

For Pegboard Panel, replace -LP with -PB



## 48" Wide Mobile Bench Cabinets

**3600 lbs. Capacity**

All-welded 12 gauge construction. The top work surface measures 24" x 48", is 41" high and is surrounded by a retaining lip on three sides (except Butcher Block). Available in 4 standard work top surfaces. Non-marking 6" Polyurethane casters, 2 rigid and 2 swivel, provide smooth rolling performance. Floor lock on the handle end securely positions the workbench.

| Top Surface          | Without Center Shelf |     | With Center Shelf |     |
|----------------------|----------------------|-----|-------------------|-----|
|                      | Model No.            | Wt. | Model No.         | Wt. |
| Powder Coated Steel  | MB-2448-FL           | 184 | MB3-2448-FL       | 214 |
| 1-3/4" Butcher Block | MJ-2448-FL           | 234 | MJ3-2448-FL       | 264 |
| 1/4" Hardboard       | MH-2448-FL           | 192 | MH3-2448-FL       | 222 |
| Non-Slip Vinyl       | MM-2448-FL           | 188 | MM3-2448-FL       | 218 |

For Pegboard Panel, add: **-PB**

For Louvered Panel, add: **-LP**



**Model MB3-2448-FL-PB**

## WITH LOCKING DOORS

**3600 lbs. Capacity**

Secure 3 point latching system with keyed handle locks the doors at top, center and bottom. Available with and without center shelf.

| Top Surface          | Without Center Shelf |     | With Center Shelf |     |
|----------------------|----------------------|-----|-------------------|-----|
|                      | Model No.            | Wt. | Model No.         | Wt. |
| Powder Coated Steel  | MB-2D-2448-FL        | 223 | MB3-2D-2448-FL    | 253 |
| 1-3/4" Butcher Block | MJ-2D-2448-FL        | 273 | MJ3-2D-2448-FL    | 303 |
| 1/4" Hardboard       | MH-2D-2448-FL        | 231 | MH3-2D-2448-FL    | 261 |
| Non-Slip Vinyl       | MM-2D-2448-FL        | 227 | MM3-2D-2448-FL    | 257 |

For Pegboard Panel, add: **-PB**

For Louvered Panel, add: **-LP**



**Model MJ-2D-2448-FL**

## WITH HEAVY-DUTY DRAWER

**3600 lbs. Capacity**

Large heavy-duty drawer measures 26"W x 20"D x 6"H and features a full width recessed handle and padlock hasp. Available with and without locking doors.

| Top Surface          | Without Locking Doors |     | With Locking Doors |     |
|----------------------|-----------------------|-----|--------------------|-----|
|                      | Model No.             | Wt. | Model No.          | Wt. |
| Powder Coated Steel  | MB-2448-HDFL          | 228 | MB-2D-2448-HDFL    | 262 |
| 1-3/4" Butcher Block | MJ-2448-HDFL          | 273 | MJ-2D-2448-HDFL    | 312 |
| 1/4" Hardboard       | MH-2448-HDFL          | 231 | MH-2D-2448-HDFL    | 270 |
| Non-Slip Vinyl       | MM-2448-HDFL          | 227 | MM-2D-2448-HDFL    | 267 |

For Pegboard Panel, add: **-PB**

For Louvered Panel, add: **-LP**



**Model MH-2D-2448-HDFL**

## WITH DOUBLE STORAGE DRAWERS

**3600 lbs. Capacity**

2 Locking storage drawers measuring 13"W x 17"D x 4-1/2"H. Available with and without locking doors.

| Top Surface          | Without Locking Doors |     | With Locking Doors |     |
|----------------------|-----------------------|-----|--------------------|-----|
|                      | Model No.             | Wt. | Model No.          | Wt. |
| Powder Coated Steel  | MB-2448-2DRFL         | 207 | MB2D-2448-2DRFL    | 246 |
| 1-3/4" Butcher Block | MJ-2448-2DRFL         | 257 | MJ2D-2448-2DRFL    | 296 |
| 1/4" Hardboard       | MH-2448-2DRFL         | 215 | MH2D-2448-2DRFL    | 254 |
| Non-Slip Vinyl       | MM-2448-2DRFL         | 211 | MM2D-2448-2DRFL    | 250 |

For Pegboard Panel, add: **-PB**

For Louvered Panel, add: **-LP**



**Model MM2D-2448-2DRFL**





Model  
MC3-2436TL

## 36" Wide Mobile Bench Cabinets

1200 lbs. Capacity

12 gauge shelves 36"W x 24"D and are enclosed on three sides, with a flush front edge. Center & bottom shelves have 1-1/2" lip front edge. 36" top shelf height, 38" overall height. Non-marking 5" Polyurethane casters, 2 rigid and 2 swivel with total lock brakes. Available in 4 standard work tops.

| Top Surface          | Without Center Shelf |     | With Center Shelf |     |
|----------------------|----------------------|-----|-------------------|-----|
|                      | Model No.            | Wt. | Model No.         | Wt. |
| Powder Coated Steel  | MC-2436TL            | 140 | MC3-2436TL        | 170 |
| 1-3/4" Butcher Block | MCJ-2436TL           | 178 | MCJ3-2436TL       | 208 |
| 1/4" Hardboard       | MCH-2436TL           | 146 | MCH3-2436TL       | 176 |
| Non-Slip Vinyl       | MCM-2436TL           | 143 | MCM3-2436TL       | 173 |



Model  
MC-2436-2DRTL



Model  
MC-2436-4DRTL

## Mobile Cabinet with 2 or 4 Drawers

Locking storage drawers under top shelf measuring 13"W x 17"D x 4-1/2"H are keyed alike.

| Top Surface          | 2 Drawers      |     | 4 Drawers      |     |
|----------------------|----------------|-----|----------------|-----|
|                      | Model No.      | Wt. | Model No.      | Wt. |
| Powder Coated Steel  | MC-2436-2DRTL  | 167 | MC-2436-4DRTL  | 190 |
| 1-3/4" Butcher Block | MCJ-2436-2DRTL | 205 | MCJ-2436-4DRTL | 228 |
| 1/4" Hardboard       | MCH-2436-2DRTL | 173 | MCH-2436-4DRTL | 196 |
| Non-Slip Vinyl       | MCM-2436-2DRTL | 170 | MCM-2436-4DRTL | 193 |



Model  
MC-2436-HDRTL

## Mobile Bench Cabinet with Heavy-Duty Drawer

1200 lbs. Capacity

Large heavy-duty drawer measures 26"W x 20"D x 6"H and features a full width recessed handle and padlock hasp.

| Top Surface          | Model No.      | Wt. |
|----------------------|----------------|-----|
| Powder Coated Steel  | MC-2436-HDRTL  | 179 |
| 1-3/4" Butcher Block | MCJ-2436-HDRTL | 217 |
| 1/4" Hardboard       | MCH-2436-HDRTL | 185 |
| Non-Slip Vinyl       | MCM-2436-HDRTL | 182 |



Model  
MC1D2436-4DRTL

## Mobile Bench Cabinet with Drawers and Door

Available in 1, 2, or 4 locking storage drawers that measure 13"W x 17"L x 4-1/2"H. Locking door with 27"H storage area. 12 gauge shelves are 36"W x 24"D and are enclosed on 3 sides with 14 gauge steel.

| Top Surface          | 1 Drawer        |     | 2 Drawers       |     | 4 Drawers       |     |
|----------------------|-----------------|-----|-----------------|-----|-----------------|-----|
|                      | Model No.       | Wt. | Model No.       | Wt. | Model No.       | Wt. |
| Powder Coated Steel  | MC1D2436-1DRTL  | 186 | MC1D2436-2DRTL  | 198 | MC1D2436-4DRTL  | 221 |
| 1-3/4" Butcher Block | MCJ1D2436-1DRTL | 224 | MCJ1D2436-2DRTL | 236 | MCJ1D2436-4DRTL | 259 |
| 1/4" Hardboard       | MCH1D2436-1DRTL | 192 | MCH1D2436-2DRTL | 204 | MCH1D2436-4DRTL | 227 |
| Non-Slip Vinyl       | MCM1D2436-1DRTL | 189 | MCM1D2436-2DRTL | 201 | MCM1D2436-4DRTL | 224 |



## 36" Wide Mobile Bench Cabinet with Locking Storage Drawers

1200 lbs. Capacity

12 gauge shelves 36"W x 24"D and are enclosed on three sides, with a flush front edge. Bottom shelf has 1-1/2" lip front edge. 36" top shelf height, 38" overall height. Locking storage drawers measuring 13"W x 17"D x 4-1/2"H are keyed alike. Non-marking 5" Polyurethane casters, 2 rigid and 2 swivel with total lock brakes.

| Top Surface          | 2 Drawers       |     | 4 Drawers       |     |
|----------------------|-----------------|-----|-----------------|-----|
|                      | Model No.       | Wt. | Model No.       | Wt. |
| Powder Coated Steel  | MC2D2436-2DRTL  | 194 | MC2D2436-4DRTL  | 217 |
| 1-3/4" Butcher Block | MCJ2D2436-2DRTL | 232 | MCJ2D2436-4DRTL | 255 |
| 1/4" Hardboard       | MCH2D2436-2DRTL | 200 | MCH2D2436-4DRTL | 223 |
| Non-Slip Vinyl       | MCM2D2436-2DRTL | 197 | MCM2D2436-4DRTL | 220 |



Model  
MCM2D2436-2DRTL

## Mobile Bench Cabinet with Doors and Heavy-Duty Drawer

1200 lbs. Capacity

Large heavy-duty drawer measures 26"W x 20"D x 6"H and features a full width recessed handle and padlock hasp. Protected by 2 doors with 3 point locking latch.

| Top Surface          | With Locking Doors |     |
|----------------------|--------------------|-----|
|                      | Model No.          | Wt. |
| Powder Coated Steel  | MC2D-2436-HDTL     | 206 |
| 1-3/4" Butcher Block | MCJ2D-2436-HDTL    | 244 |
| 1/4" Hardboard       | MCH2D-2436-HDTL    | 212 |
| Non-Slip Vinyl       | MCM2D-2436-HDTL    | 209 |



Model  
MCJ2D-2436-HDTL

## Mobile Bench Cabinet with Locking Doors

1200 lbs. Capacity

Locking double doors safeguard your valuables. Secure 3 point latching system with keyed handle anchors the doors at top, center and bottom. Doors open a full 180 degrees to allow full access. Available with and without center shelf.

| Top Surface          | Without Center Shelf |     | With Center Shelf |     |
|----------------------|----------------------|-----|-------------------|-----|
|                      | Model No.            | Wt. | Model No.         | Wt. |
| Powder Coated Steel  | MC-2D-2436-TL        | 167 | MC3-2D-2436-TL    | 199 |
| 1-3/4" Butcher Block | MCJ-2D-2436-TL       | 205 | MCJ3-2D-2436-TL   | 237 |
| 1/4" Hardboard       | MCH-2D-2436-TL       | 173 | MCH3-2D-2436-TL   | 205 |
| Non-Slip Vinyl       | MCM-2D-2436-TL       | 170 | MCM3-2D-2436-TL   | 202 |



Model  
MCH-2D-2436-TL



## Mobile Workstation

1200 lbs. Capacity

Top shelf is 34" high with a 1-1/2" retaining lip on 3 sides. Bottom and middle shelves are lip up on all 4 sides. 12 gauge shelves. Powder coated finish. 5" polyurethane casters, 2 rigid and 2 total lock swivel casters.

|         | 2-SHELF<br>24-1/2" Clearance |     | 3-SHELF<br>11-1/2' Clearance |     |
|---------|------------------------------|-----|------------------------------|-----|
| Size    | Model No.                    | Wt. | Model No.                    | Wt. |
| 24 x 36 | MW-2436-5TL                  | 84  | 3MW-2436-5TL                 | 115 |
| 24 x 48 | MW-2448-5TL                  | 103 | 3MW-2448-5TL                 | 150 |

**PEGBOARD OR LOUVERED PANEL** - Available with a bolt-on 16 gauge pegboard or louvered panel. Panels are 24"H. Gray powder coated finish. (Pegs and bins not included.)

|         | 2-SHELF<br>24-1/2" Clearance |     | 3-SHELF<br>11-1/2' Clearance |     |
|---------|------------------------------|-----|------------------------------|-----|
| Size    | Model No.                    | Wt. | Model No.                    | Wt. |
| 24 x 36 | MW-2436-5TL-PB               | 102 | 3MW-2436-5TL-PB              | 122 |
| 24 x 48 | MW-2448-5TL-PB               | 127 | 3MW-2448-5TL-PB              | 162 |

For Louvered Panel, replace **PB** with **LP**



## Mobile Workstation with Storage Drawer

Available with 1 or 2 locking drawers (keyed alike). Drawers measure 13"W x 17"D x 4-1/2"H. Shelf clearance is 18" below drawer. Non-marking 5" polyurethane casters, 2 rigid and 2 total lock swivels that lock both wheel and swivel at the same time. Gray powder coated finish.

| Shelf Size                 | 1-DRAWER Model No. | Wt. | 2-DRAWER Model No. | Wt. |
|----------------------------|--------------------|-----|--------------------|-----|
| 24 x 36                    | MW-2436-5TL-DR     | 97  | MW-2436-5TL-2DR    | 114 |
| 24 x 48                    | MW-2448-5TL-DR     | 116 | MW-2448-5TL-2DR    | 129 |
| <b>with Pegboard Panel</b> |                    |     |                    |     |
| 24 x 36                    | MW2436-5TL-DRPB    | 115 | MW2436-5TL2DRPB    | 128 |
| 24 x 48                    | MW2448-5TL-DRPB    | 140 | MW2448-5TL2DRPB    | 153 |

For Louvered Panel, replace **PB** with **LP**




## Work-Height Mobile Workstation with writing shelf, drawers, and pegboard

12 gauge top shelf is 42" high making this a perfect standing workstation. 16 gauge steel pegboard extends 24" above workbench. Pegboard holes are on 1" centers and accept most common light and heavy-duty hooks. Louvered panel available in place of pegboard. 2 locking storage drawers. Writing shelf measures 14" wide x 12-1/2" deep and has a sloped storage pocket underneath. 2 swivel and 2 rigid total lock casters with 5" polyurethane wheels. Total lock casters keep the unit located when in use. (Bins and Hooks not included).

| Size D x W | Model No.      | Wt. |
|------------|----------------|-----|
| 24 x 36    | QC2436-TL2DRPB | 163 |
| 24 x 48    | QC2448-TL2DRPB | 187 |
| 24 x 60    | QC2460-TL2DRPB | 212 |

For Louvered Panel, replace **PB** with **LP**





## Mobile Tables

1000 lbs. Capacity

All-welded steel construction means years of rugged service and no assembly. This single shelf model with open style cross-arm base serves as a workbench where seating is required. This mobile table has a 34" overall height and features 4 swivel casters for increased mobility and 5" non-marking polyurethane wheels with wheel brakes.

| Size    | Model No.     | Wt. |
|---------|---------------|-----|
| 18 x 32 | IP-1832RM-BRK | 59  |
| 24 x 36 | IP-2436RM-BRK | 65  |
| 24 x 48 | IP-2448RM-BRK | 77  |
| 24 x 60 | IP-2460RM-BRK | 94  |
| 30 x 48 | IP-3048RM-BRK | 92  |
| 30 x 60 | IP-3060RM-BRK | 104 |
| 30 x 72 | IP-3072RM-BRK | 118 |



Model  
IP-2448RM-BRK



Available with  
Total Lock Casters  
replace -BRK with -TL

## Mobile Tables

1000 lbs. and 3600 lbs. Capacity

All-welded 12 gauge steel construction. Available with either 5" or 6" non-marking polyurethane casters. 4 swivel casters provide increased mobility. 34" overall height. Durable gray powder coated finish. Ships set up and ready for immediate use.

| Size    | 1000 LBS. CAPACITY<br>24-1/2" Shelf Clearance |     | 3600 LBS. CAPACITY<br>23" Shelf Clearance |     |
|---------|---|-----|---|-----|
|         | Model No.                                     | Wt. | Model No.                                 | Wt. |
| 18 x 32 | IP-1832-2                                     | 67  | -   | -   |
| 24 x 36 | IP-2436-2                                     | 87  | IP-2436-2-6PY                             | 113 |
| 24 x 48 | IP-2448-2                                     | 107 | IP-2448-2-6PY                             | 133 |
| 24 x 60 | IP-2460-2                                     | 127 | IP-2460-2-6PY                             | 144 |
| 30 x 48 | IP-3048-2                                     | 125 | IP-3048-2-6PY                             | 154 |
| 30 x 60 | IP-3060-2                                     | 151 | IP-3060-2-6PY                             | 179 |
| 30 x 72 | IP-3072-2                                     | 177 | IP-3072-2-6PY                             | 193 |
| 36 x 72 | -   | -   | IP-3672-2-6PY                             | 233 |

Wheel Brakes: 5" add: -BRK; 6" add: -BK

Total Lock Casters: add: -TL (5" only)



Model  
IP-2448-2-6PY

## Mobile Tables – 3 Shelf

All-welded, heavy-duty 12 gauge construction, this mobile table is built to last. 3 shelves for plenty of additional storage. Available with 5" or 6" non-marking polyurethane wheels. 4 swivel casters provide greater maneuverability. 34" overall height with durable powder coated finish.

| Size    | 1000 LBS. CAPACITY<br>11" Shelf Clearance |     | 3600 LBS. CAPACITY<br>10-1/2" Shelf Clearance |     |
|---------|---|-----|---|-----|
|         | Model No.                                 | Wt. | Model No.                                     | Wt. |
| 24 x 36 | 3IP-2436-5PY                              | 124 | 3IP-2436-6PY                                  | 150 |
| 24 x 48 | 3IP-2448-5PY                              | 154 | 3IP-2448-6PY                                  | 180 |
| 24 x 60 | 3IP-2460-5PY                              | 186 | 3IP-2460-6PY                                  | 203 |
| 30 x 48 | 3IP-3048-5PY                              | 182 | 3IP-3048-6PY                                  | 210 |
| 30 x 60 | -   | -   | 3IP-3060-6PY                                  | 249 |

Wheel Brakes: 5" add: -BRK; 6" add: -BK



Model  
3IP-2448-6PY



**Model**  
**IPG2448-8PHFLPL**

## Heavy-Duty Mobile Table

**5000 lbs. Capacity**

Formed 12 gauge shelves with extra reinforcement are welded to 2" x 2" corner angles. Heavy service casters have large top plate and swivel race. Four swivel casters provide maximum maneuverability. 4-position swivel locks on one end will convert swivel casters into rigid. Floor lock on other end prevents unwanted movement when necessary. Overall height 36". Powder coated finish.

| Overall W x D | Model No.       | Wt. |
|---------------|-----------------|-----|
| 24 x 36       | IPG2436-8PHFLPL | 160 |
| 24 x 48       | IPG2448-8PHFLPL | 175 |
| 24 x 60       | IPG2460-8PHFLPL | 185 |
| 30 x 48       | IPG3048-8PHFLPL | 193 |
| 30 x 60       | IPG3060-8PHFLPL | 219 |
| 30 x 72       | IPG3072-8PHFLPL | 259 |
| 36 x 72       | IPG3672-8PHFLPL | 280 |



**Model**  
**IPH-3060-8PHBK**

## Extra-Heavy-Duty 7 Gauge Mobile Table

**5000 lbs. Capacity**

Top is formed from 7 gauge steel and reinforced with 2" angle iron to withstand the most punishing applications. 2" angle corner posts and additional side braces increase stability. Heavy service casters have larger swivel raceway to handle extra capacity. Maneuvers on 4 swivel casters with 8" x 2" phenolic wheels and wheel brakes. Overall height 34".

| W x L   | Model No.      | Wt. |
|---------|----------------|-----|
| 30 x 48 | IPH-3048-8PHBK | 211 |
| 30 x 60 | IPH-3060-8PHBK | 237 |
| 36 x 60 | IPH-3660-8PHBK | 261 |
| 36 x 72 | IPH-3672-8PHBK | 290 |



**Model**  
**WW-3672-6PHFL**

## Mobile Workbenches

**3600 lbs. and 5000 lbs. Capacity**

**With Casters & Floor Lock**

Move these Heavy-Duty Workbenches easily with two swivel and two rigid phenolic casters. When in the desired position, engage the floor lock between the swivel casters to avoid unwanted movement. 7 gauge reinforced steel top with rounded comfort edges. Heavy 2" x 2" angle legs are 1/4" thick with 7 gauge welded gussets.



Floor lock between swivel casters stops unwanted movement.

| Size D x W | 6" x 2" PHENOLIC<br>34" Bench Top Height<br>3600 lbs. Capacity |     | 8" x 2" PHENOLIC<br>36" Bench Top Height<br>5000 lbs. Capacity |     |
|------------|--|-----|--|-----|
|            | Model No.  | Wt. | Model No.  | Wt. |
| 30 x 36    | WW-3036-6PHFL  | 194 | WW-3036-8PHFL  | 201 |
| 30 x 48    | WW-3048-6PHFL  | 231 | WW-3048-8PHFL  | 238 |
| 30 x 60    | WW-3060-6PHFL  | 263 | WW-3060-8PHFL  | 270 |
| 30 x 72    | WW-3072-6PHFL  | 289 | WW-3072-8PHFL  | 296 |
| 36 x 60    | WW-3660-6PHFL  | 297 | WW-3660-8PHFL  | 304 |
| 36 x 72    | WW-3672-6PHFL  | 334 | WW-3672-8PHFL  | 341 |
| 42 x 84    | WW-4284-6PHFL  | 471 | WW-4284-8PHFL  | 478 |



## Heavy-Duty Workbenches

**Up to 10,000 lbs. Capacity**

Heavy-Duty Welded Workbenches have an extra strong 7 gauge (0.180 inch) reinforced steel top with rounded comfort edges that can support up to 10,000 lbs. UDL. Heavy 2" x 2" angle legs are 1/4"-thick with welded 7 gauge gussets. The stationary models have footpads with a 5/8"-diameter anchor hole. A sturdy 12 gauge lower shelf has a 500 lbs. capacity for added storage. All models are welded and ship set up, ready for immediate use.



**Model  
WW-3672-HD**  
Shown with heavy-duty drawer

### FIXED HEIGHT BENCHES – 34" High

**ADJUSTABLE HEIGHT - 28" to 37" high on 1" centers.**

| SIZE<br>D x W | FIXED HEIGHT<br>Model No. | Wt. | ADJUSTABLE HEIGHT<br>Model No. | Wt. |
|---------------|---------------------------|-----|--------------------------------|-----|
| 30 x 36       | WW-3036                   | 151 | WW-3036-ADJ                    | 176 |
| 30 x 48       | WW-3048                   | 187 | WW-3048-ADJ                    | 212 |
| 30 x 60       | WW-3060                   | 220 | WW-3060-ADJ                    | 245 |
| 30 x 72       | WW-3072                   | 263 | WW-3072-ADJ                    | 288 |
| 36 x 60       | WW-3660                   | 250 | WW-3660-ADJ                    | 275 |
| 36 x 72       | WW-3672                   | 287 | WW-3672-ADJ                    | 312 |
| 42 x 84       | WW-4284                   | 421 | WW-4284-ADJ                    | 446 |



**Model  
WW-3072-ADJ**

#### OPTIONS AVAILABLE

##### Heavy-Duty Drawer

26"W x 20"D x 6"H (Center Mount) with padlock hasp. -HD

##### Heavy-Duty Riser Shelf

12" high above bench top, 10" deep. -HR



## Extra-Heavy-Duty Welded Steel Workbench

**15,000 lbs. Capacity**

These all welded extra heavy-duty workbenches are designed for heavy-duty uses. The workbench top is 7 gauge steel and is supported by a frame of 3" x 1-1/2" structural C channel. The legs are constructed from the 3" C channel and are welded to the top with 7 gauge gussets. 12 gauge lower shelf is 22" deep and holds 500 lbs. Foot pads with 5/8" diameter anchor holes. Clearance below the lower shelf is 4-1/2" to allow fork access. Top height is 34". Gray powder coat finish.



**Model  
WX-4284-34**

| Size<br>D x W | Capacity | Model No.  | Wt. |
|---------------|----------|------------|-----|
| 36 x 60 x 34  | 15,000   | WX-3660-34 | 348 |
| 36 x 72 x 34  | 15,000   | WX-3672-34 | 396 |
| 42 x 84 x 34  | 15,000   | WX-4284-34 | 532 |



Underside supporting frame





**Model**  
**WST1-2448-36**

## Fixed Height Welded Steel Workbenches

**Capacities to 5000 lbs. UDL**

Smooth 12 gauge steel top is double-reinforced with angle iron on the underside and gussets in the corners for exceptional strength and rigidity. Legs and lower braces are 1-1/2" x 1-1/2" x 3/16" thick angle iron. Legs have footpads with 5/8" hole for mounting to the floor. These all-welded units ship fully assembled and ready for immediate use. 36" overall height.

**WORKBENCH WITH HALF LOWER SHELF** – Half depth 12 gauge lower shelf with lip at rear provides room for additional storage while leaving ample room for legs when seated. Capacity 500 lbs.

**WORKBENCH WITH OPEN BASE** – Angle iron cross braces are centered to allow leg room on both sides.

**FACTORY INSTALLED PEGBOARD OR LOUVERED PANELS** – Available with a bolt-on 16 gauge pegboard or louvered panel. Panels are 24" high. Must be ordered with bench. Will not attach to standard benches. Gray powder coated finish. (Pegs and bins are not included)

| SIZE<br>D x W x H | Cap. | With Lower Shelf<br>Model No. | Wt. | With Open Base<br>Model No. | Wt. |
|-------------------|------|-------------------------------|-----|-----------------------------|-----|
| 24 x 48 x 36      | 5000 | WST2-2448-36                  | 109 | WST1-2448-36                | 87  |
| 24 x 60 x 36      | 4500 | WST2-2460-36                  | 136 | WST1-2460-36                | 109 |
| 30 x 48 x 36      | 5000 | WST2-3048-36                  | 124 | WST1-3048-36                | 98  |
| 30 x 60 x 36      | 4500 | WST2-3060-36                  | 153 | WST1-3060-36                | 121 |
| 30 x 72 x 36      | 4000 | WST2-3072-36                  | 186 | WST1-3072-36                | 142 |
| 36 x 60 x 36      | 4500 | WST2-3660-36                  | 174 | WST1-3660-36                | 136 |
| 36 x 72 x 36      | 4000 | WST2-3672-36                  | 201 | WST1-3672-36                | 157 |
| 36 x 84 x 36      | 3000 | WST2-3684-36                  | 224 | WST1-3684-36                | 177 |

For Pegboard Panel, add: **-PB**

For Louvered Panel, add: **-LP**

**HARDBOARD OVER STEEL TOP** – 1/4" Hardboard surface attached directly over 12 gauge steel top. Hardboard will help to deaden the sound of heavy blows and metal to metal contact. Hardboard is a more "forgiving" surface than steel and will help protect parts.

| SIZE<br>D x W x H | Cap. | With Lower Shelf<br>Model No. | Wt. | With Open Base<br>Model No. | Wt. |
|-------------------|------|-------------------------------|-----|-----------------------------|-----|
| 24 x 48 x 36      | 5000 | WSH2-2448-36                  | 116 | WSH1-2448-36                | 94  |
| 30 x 48 x 36      | 5000 | WSH2-3048-36                  | 132 | WSH1-3048-36                | 106 |
| 36 x 60 x 36      | 4500 | WSH2-3660-36                  | 186 | WSH1-3660-36                | 147 |
| 36 x 72 x 36      | 4000 | WSH2-3672-36                  | 216 | WSH1-3672-36                | 172 |
| 36 x 84 x 36      | 3000 | WSH2-3684-36                  | 244 | WSH1-3684-36                | 197 |



### OPTIONS AVAILABLE

**Riser Shelf**  
12" high x 10" deep. **-R**

**Locking Drawer**  
13" W x 17" D x 4-1/2" H  
(Mounted on right side). **-DR**



**Lower Shelf Model**  
**with optional pegboard**  
**WST2-2448-36-LP**



**Lower Shelf Model**  
**with optional pegboard**  
**WST2-2448-36-PB**



**Model**  
**WSH2-2448-36**



## Stainless Steel Top Welded Workbenches

Combine the strength of a welded steel table with corrosion resistance of Stainless Steel! 16 gauge Type 304 Stainless Steel with a #4 finish is applied securely to the 12 gauge steel top. The lower shelf and remaining components have a durable gray powder coat finish. The stainless steel surface provides superior chemical, corrosion, and rust resistance without sacrificing overall strength.

| SIZE<br>D x W x H   | Cap. | Model No.    | Wt. |
|---|------|--------------|-----|
| <b>Fixed Height Models - 36" Overall Height</b>                   |      |              |     |
| 30 x 48   | 5000 | WSS2-3048-36 | 153 |
| 30 x 60   | 4500 | WSS2-3060-36 | 188 |
| 30 x 72   | 4000 | WSS2-3072-36 | 229 |
| <b>Adjustable Height Models - 27" - 41" High in 2" Increments</b> |      |              |     |
| 30 x 48   | 5000 | WSS2-3048-AH | 155 |
| 30 x 60   | 4500 | WSS2-3060-AH | 190 |
| 30 x 72   | 4000 | WSS2-3072-AH | 231 |



Model  
WSS2-3048-AH



Model  
WSS2-3048-36

## Adjustable Height Welded Workbenches

Capacities to 5000 lbs. UDL

Legs are adjustable from 27" to 41" high on 2" centers. 12 gauge steel top is double-reinforced with angle iron on the underside and gussets in the corners for exceptional strength and rigidity. These all-welded units ship fully assembled and ready for immediate use.

### Steel Top

| SIZE<br>D x W | Cap. | With Lower Shelf<br>Model No. | Wt. | With Open Base<br>Model No. | Wt. |
|---------------|------|-------------------------------|-----|-----------------------------|-----|
| 24 x 48       | 5000 | WST2-2448-AH                  | 111 | WST1-2448-AH                | 89  |
| 24 x 60       | 4500 | WST2-2460-AH                  | 138 | WST1-2460-AH                | 111 |
| 30 x 48       | 5000 | WST2-3048-AH                  | 126 | WST1-3048-AH                | 100 |
| 30 x 60       | 4500 | WST2-3060-AH                  | 155 | WST1-3060-AH                | 123 |
| 30 x 72       | 4000 | WST2-3072-AH                  | 188 | WST1-3072-AH                | 144 |
| 36 x 60       | 4500 | WST2-3660-AH                  | 176 | WST1-3660-AH                | 138 |
| 36 x 72       | 4000 | WST2-3672-AH                  | 203 | WST1-3672-AH                | 159 |
| 36 x 84       | 3000 | WST2-3684-AH                  | 225 | WST1-3684-AH                | 179 |



Model  
WST2-3060-AH



Model  
WSH2-2448-AH

### Hardboard over Steel Top

| SIZE<br>D x W | Cap. | With Lower Shelf<br>Model No. | Wt. | With Open Base<br>Model No. | Wt. |
|---------------|------|-------------------------------|-----|-----------------------------|-----|
| 24 x 48       | 5000 | WSH2-2448-AH                  | 118 | WSH1-2448-AH                | 96  |
| 30 x 48       | 5000 | WSH2-3048-AH                  | 134 | WSH1-3048-AH                | 108 |
| 36 x 60       | 4500 | WSH2-3660-AH                  | 188 | WSH1-3660-AH                | 149 |
| 36 x 72       | 4000 | WSH2-3672-AH                  | 218 | WSH1-3672-AH                | 174 |
| 36 x 84       | 3000 | WSH2-3684-AH                  | 246 | WSH1-3684-AH                | 199 |



**Model**  
**WSL2-2448-36**

## Welded Steel Workbenches with Back and End Stops

12 gauge steel top workbench with angle iron reinforcements give these workbenches capacity to 5000 lbs. 1-1/2" raised edge on back and each side to keep parts and components contained. Fully welded and shipped set up, ready for use. Footpads have mounting holes ready for anchoring to your floor. Durable gray powder coat finish.

| SIZE<br>D x W | Cap. | FIXED HEIGHT<br>36" Overall Height |     | ADJUSTABLE HEIGHT<br>27"-41" High in 2" Increments |     |
|---------------|------|------------------------------------|-----|--|-----|
|               |      | Model No.                          | Wt. | Model No.  | Wt. |
| 24 x 48       | 5000 | WSL2-2448-36                       | 114 | WSL2-2448-AH                                       | 116 |
| 24 x 60       | 4500 | WSL2-2460-36                       | 146 | WSL2-2460-AH                                       | 148 |
| 30 x 48       | 5000 | WSL2-3048-36                       | 134 | WSL2-3048-AH                                       | 136 |
| 30 x 60       | 4500 | WSL2-3060-36                       | 164 | WSL2-3060-AH                                       | 166 |
| 30 x 72       | 4000 | WSL2-3072-36                       | 198 | WSL2-3072-AH                                       | 200 |
| 36 x 60       | 4500 | WSL2-3660-36                       | 187 | WSL2-3660-AH                                       | 189 |
| 36 x 72       | 4000 | WSL2-3672-36                       | 215 | WSL2-3672-AH                                       | 217 |
| 36 x 84       | 3000 | WSL2-3684-36                       | 239 | WSL2-3684-AH                                       | 240 |



**Model**  
**WA-2848-P**  
Shown with DR-KIT and  
factory installed Power Strip

## Welded Workbenches with Backstops

**3000 lbs. Capacity UDL**

Formed 12 gauge steel tops are double reinforced and have a 3" high backstop. Half-depth lower shelf is 12 gauge with a 3" lip at rear. Ship fully assembled. Durable powder coated finish.

### STATIONARY MODELS - 3000 lbs. Capacity

Adjustable from 27" to 41" high in 2" increments. Fixed Heights are 36" high with angle iron legs and have footpads with 5/8" lag hole.

| Size<br>D x W | ADJUSTABLE HEIGHT |     | FIXED HEIGHT |     |
|---------------|-------------------|-----|--------------|-----|
|               | Model No.         | Wt. | Model No.    | Wt. |
| 28 x 48       | WA-2848           | 119 | WB-2848      | 106 |
| 28 x 60       | WA-2860           | 138 | WB-2860      | 126 |
| 28 x 72       | WA-2872           | 158 | WB-2872      | 155 |



**Model**  
**WM-2848-E-P-PB**

### MOBILE MODELS - 1200 lbs. Capacity

5" swivel polyurethane casters with total locks. 36" high with angle iron legs.

| Size D x W | Model No. | Wt. |
|------------|-----------|-----|
| 28 x 48    | WM-2848   | 138 |
| 28 x 60    | WM-2860   | 157 |
| 28 x 72    | WM-2872   | 176 |

### STACKABLE DRAWER (Order Separately)

Ships with mounting hardware for customer installation on series WA, WB, and WM Workbenches above. Includes cylinder lock and 2 keys.

| Size D x W x H               | Model No. | Wt. |
|------------------------------|-----------|-----|
| 13"W x 17"D x 4-1/2"H Inside | DR-KIT    | 21  |

**Factory Installed Options** (add code to Workbench Model)

- E End Stops: 1-1/2" high formed 12 gauge.
- P Power Strip: UL listed 15 amp Power Tap with 6 grounded outlets, circuit breaker, switch, 15 ft. power cord and built-in cord wrap.
- PB Pegboard: 24" high 16 gauge pegboard panel.
- LP Louvered Panel: 24" high 16 gauge panel.
- R Riser Shelf: 12" high x 10" deep.



**Model**  
**DR-KIT**





## Folding Leg Welded Workbenches

**3000 lbs. Capacity**

Folding legs are hinged and welded to the top, and can be folded down for transport or storage by removing wing nut that secures leg braces. Legs adjust in 2" increments

**Steel Top** – Welded 12 gauge steel tops are channel reinforced for added strength and durability. 28" to 42" high.

| D x W   | Model No.  | Wt. |
|---------|------------|-----|
| 30 x 72 | WF-3072-AH | 139 |
| 36 x 72 | WF-3672-AH | 152 |
| 36 x 84 | WF-3684-AH | 171 |



**Model  
WF-3672-AH**

**Hardboard over Steel Top** – 1/4" hardboard over 12 gauge steel. 28-1/4" to 42-1/4" high.

| D x W   | Model No.   | Wt. |
|---------|-------------|-----|
| 36 x 72 | WFH-3672-AH | 167 |
| 36 x 84 | WFH-3684-AH | 192 |



**Legs Folded**

## Butcher Block Top

**3000 lbs. Capacity**

1-3/4" thick. 29-3/4" to 43-3/4" high.

| D x W   | Model No.   | Wt. |
|---------|-------------|-----|
| 30 x 72 | WFJ-3072-AH | 147 |

## Continuous Width Production Tables

**3000 lbs. Capacity**

**Ideal for assembly lines. No stringer means working from both sides!**

Heavy-duty 12 gauge tops are available in either 30" or 36" depth with reinforced understructure and strengthening gussets. Tops come in 4, 5, and 6 ft. widths to allow for an infinitely continuous work surface in 1 ft. increments (excludes 7 ft.). Starter kit includes (1) table top, (2) leg sets, and (4) gussets. Each additional Add-on kit includes (1) table top, (1) leg set and (4) gussets. Legs and gussets bolt to table-tops with included hardware. Ships flat. Overall height is 36". Gray powder coated finish.



**WSE-STARTER**



**WSE-ADD-ON**

| STARTER KIT<br><i>includes (1) table top, (2) leg sets, and (4) gussets</i> |       |                 |     | ADD-ON KIT<br><i>includes (1) table top (1) leg set, and (4) gussets</i> |       |                |     |
|---|-------|-----------------|-----|--|-------|----------------|-----|
| Depth   | Width | Model No.       | Wt. | Depth  | Width | Model No.      | Wt. |
| 30"   | 4 ft. | WSE3048-STARTER | 126 | 30"  | 4 ft. | WSE3048-ADD-ON | 126 |
|   | 5 ft. | WSE3060-STARTER | 138 |  | 5 ft. | WSE3060-ADD-ON | 138 |
|   | 6 ft. | WSE3072-STARTER | 153 |  | 6 ft. | WSE3072-ADD-ON | 153 |
| 36"   | 4 ft. | WSE3648-STARTER | 140 | 36"  | 4 ft. | WSE3648-ADD-ON | 140 |
|   | 5 ft. | WSE3660-STARTER | 154 |  | 5 ft. | WSE3660-ADD-ON | 154 |
|   | 6 ft. | WSE3672-STARTER | 170 |  | 6 ft. | WSE3672-ADD-ON | 170 |



Model  
WT-2448-LL

## Butcher Block Top Tables

These 1-3/4" thick butcher block tops have a two-coat catalyzed varnish finish, and are attached to an all-welded, angle steel frame for unmatched rigidity and strength. The impact resistant, hardwood tops are non-conductive, resist damage from heavy blows, and provide an extremely durable, yet "forgiving" work surface. All models are fully assembled and ready for immediate use.

**SWIVEL CASTER MODELS** – 3" x 1-1/4" hard rubber casters with wheel brakes 35" high. 1000 lbs. capacity.

**LEG LEVELER MODELS** – Adjustable from 32" to 35" high. 2000 lbs. capacity.



Model  
WTS-2448-3R-2DR

| SIZE<br>D x W | OPEN ANGLE FRAME BASE |     |                           |             | 12 GAUGE STEEL LOWER SHELF |     |                           |     |
|---------------|-----------------------|-----|---------------------------|-------------|----------------------------|-----|---------------------------|-----|
|               | CASTERS<br>Model No.  | Wt. | LEG LEVELERS<br>Model No. | Size<br>Wt. | CASTERS<br>Model No.       | Wt. | LEG LEVELERS<br>Model No. | Wt. |
| 24 x 24       | WT-2424-3R            | 65  | WT-2424-LL                | 60          | WTS-2424-3R                | 76  | WTS-2424-LL               | 71  |
| 24 x 36       | WT-2436-3R            | 85  | WT-2436-LL                | 80          | WTS-2436-3R                | 102 | WTS-2436-LL               | 97  |
| 24 x 48       | WT-2448-3R            | 105 | WT-2448-LL                | 100         | WTS-2448-3R                | 128 | WTS-2448-LL               | 123 |
| 30 x 48       | WT-3048-3R            | 121 | WT-3048-LL                | 116         | WTS-3048-3R                | 153 | WTS-3048-LL               | 148 |
| 30 x 60       | WT-3060-3R            | 151 | WT-3060-LL                | 144         | WTS-3060-3R                | 162 | WTS-3060-LL               | 169 |
| 30 x 72       | WT-3072-3R            | 174 | WT-3072-LL                | 169         | WTS-3072-3R                | 197 | WTS-3072-LL               | 192 |
| 36 x 72       | WT-3672-3R            | 174 | WT-3672-LL                | 169         | WTS-3672-3R                | 197 | WTS-3672-LL               | 192 |



Model  
WSJ2-3060-AH-DR

## Welded Steel Workbenches with Butcher Block Tops

3000 lbs. Capacity

Units ship fully assembled - ready for immediate use

Butcher Block top is 1-3/4" thick, helps deaden sound, absorbs impact. Replaceable top is attached to an all-welded steel frame. Half lower shelf constructed of 12 gauge steel with 3" high lip at rear. All-welded units ship fully assembled and ready for immediate use. Available in Fixed and Adjustable heights, and with optional factory installed Locking Drawer that measures 13"W x 17"D x 4-1/2"H (Right Side Mount).

| SIZE<br>D x W | Fixed Height Models<br>37-3/4" Overall Height |     |                          |     | Adjustable Height Models<br>28-3/4" to 42-3/4" High in 2" increments |     |                          |     |
|---------------|---|-----|--------------------------|-----|--|-----|--------------------------|-----|
|               | Without Drawer<br>Model No.                   | Wt. | With Drawer<br>Model No. | Wt. | Without Drawer<br>Model No.  | Wt. | With Drawer<br>Model No. | Wt. |
| 24 x 48       | WSJ2-2448-36                                  | 105 | WSJ2-2448-36-DR          | 100 | WSJ2-2448-AH   | 128 | WSJ2-2448-AH-DR          | 123 |
| 30 x 48       | WSJ2-3048-36                                  | 121 | WSJ2-3048-36-DR          | 116 | WSJ2-3048-AH   | 153 | WSJ2-3048-AH-DR          | 148 |
| 30 x 60       | WSJ2-3060-36                                  | 151 | WSJ2-3060-36-DR          | 144 | WSJ2-3060-AH   | 162 | WSJ2-3060-AH-DR          | 169 |
| 30 x 72       | WSJ2-3072-36                                  | 174 | WSJ2-3072-36-DR          | 169 | WSJ2-3072-AH   | 197 | WSJ2-3072-AH-DR          | 192 |
| 36 x 72       | WSJ2-3672-36                                  | 174 | WSJ2-3672-36-DR          | 169 | WSJ2-3672-AH   | 197 | WSJ2-3672-AH-DR          | 192 |



Model  
CRT-3672-LL

## Conference Room Table with Butcher Block Top

This attractive table is suitable for both industrial and in-office applications and features inset legs for easy and comfortable seating. The 1-3/4" thick butcher block top is impact resistant, non-conductive, and extremely durable. The welded steel frame is constructed of 1-1/2" square tubing with a 1/8" thick wall and a durable powder coated finish. The unit ships fully assembled and ready for immediate use. Heavy-duty leg levelers adjust for 31-34" Overall Height.

| Overall W x D | Model No.   | Wt. |
|---------------|-------------|-----|
| 36 x 72       | CRT-3672-LL | 170 |



## Enclosed Table with Drawer and Butcher Block Top

1-3/4" thick butcher block top table enclosed on three sides with heavy-duty 14 gauge steel sides. The top measures 24" x 24" and stands 34" tall. Leg levelers allow adjustment on uneven floors, as well as 3" overall height adjustment. Locking storage drawer is 13"W x 17"D x 4-1/2"H and comes with two keys. Durable powder coated finish. Ships fully assembled and ready for immediate use.

| Overall W x D | Model No.      | Wt. |
|---------------|----------------|-----|
| 24 x 24       | WTC-2424-LL-DR | 134 |



**Model**  
**WTC-2424-LL-DR**

## Work Center Cabinet with Butcher Block Top

1-3/4" butcher block top provides a durable, yet forgiving work surface. The non-conductive butcher block top is securely attached to the all-welded, heavy-duty, 14 gauge steel cabinet. Features a keyed handle with a 3-point locking mechanism. 37" Overall height. 26" high interior cabinet clearance. Fully assembled and ready for immediate use. Durable powder coated finish.

| Overall W x D | Model No.      | Wt. |
|---------------|----------------|-----|
| 24 x 36       | WTC-2D-2436-LL | 166 |
| 24 x 48       | WTC-2D-2448-LL | 218 |
| 30 x 48       | WTC-2D-3048-LL | 230 |
| 30 x 60       | WTC-2D-3060-LL | 265 |
| 30 x 72       | WTC-2D-3072-LL | 302 |



**Model**  
**WTC-2D-2436-LL**

## Counter Height Work Table with Butcher Block Top

The 1-3/4" thick butcher block top work surface is 42" high. Heavy-duty leg levelers provide up to an additional 3" of height. Butcher block tops are impact resistant, non-conductive, resist damage from heavy blows, and provide an extremely durable, yet forgiving work surface. These tops are attached to an all-welded, powder coated steel frame and ship fully assembled.

| Overall W x D x H | Model No.      | Wt. |
|-------------------|----------------|-----|
| 24 x 48           | WT1-2448-LL-42 | 105 |
| 30 x 48           | WT1-3048-LL-42 | 121 |
| 30 x 60           | WT1-3060-LL-42 | 137 |
| 30 x 72           | WT1-3072-LL-42 | 160 |
| 36 x 72           | WT1-3672-LL-42 | 184 |



**Model**  
**WT1-2448-LL-42**





Model  
MJ3-LL-2D-2448-LP



Model  
MHP3-LL-2D-2448

## Counter Height Bench Cabinets

The top work surface measures 24" x 48", is 41" high and is surrounded by retaining lip on three sides (except Butcher Block Top models). Available in 3 standard work top surfaces. Keyed handle and 3 point latching mechanism. Fixed center shelf. Clearview doors provide ventilation and visibility. Heavy-duty leg levelers adjust for up to 3" of additional height. All-welded 12 gauge construction. Durable powder coated gray finish. Also available with a factory intalled louvered or pegboard panel.

| Top Surface          | Solid Doors    |     | Clearview Doors |     |
|----------------------|----------------|-----|-----------------|-----|
|                      | Model No.      | Wt. | Model No.       | Wt. |
| Powder Coated Steel  | MB3-LL-2D-2448 | 305 | MBP3-LL-2D-2448 | 294 |
| 1-3/4" Butcher Block | MJ3-LL-2D-2448 | 355 | MJP3-LL-2D-2448 | 344 |
| 1/4" Hardboard       | MH3-LL-2D-2448 | 313 | MHP3-LL-2D-2448 | 302 |

For Pegboard Panel, add: **-PB**

For Louvered Panel, add: **-LP**



Model  
MC3-2D-2436-LL

## STATIONARY Shop Cabinets

Top, center and bottom shelves are 12 gauge steel, with 14 gauge sides and back. Top shelf has a 2" retaining lip around 3 sides. Locking handle with 2 keys. Leg levelers allow 3" of overall height adjustment. Height to top shelf is adjustable from 31"-34". 12-1/2" shelf clearance. Ships fully assembled.

| Size<br>D x W | Model No.      | Doors | Wt. |
|---------------|----------------|-------|-----|
| 18 x 18       | MC3-1D-1818-LL | 1     | 98  |
| 24 x 24       | MC3-2D-2424-LL | 2     | 141 |
| 24 x 36       | MC3-2D-2436-LL | 2     | 187 |



Model  
WWC-3672

## Heavy-Duty Cabinet Workbench

10,000 lbs. Capacity

Top is reinforced 7 gauge steel with edges formed to a comfortable radius. Legs are 2" x 2" x 1/4" angle with footpads & lag holes. Doors and enclosure are 12 gauge, keyed locking handle and 3 point locking mechanism for security. Each 250 lb. capacity Drawer measures 26"W x 20"D x 6"H., has heavy-duty rollers, a padlock hasp and full-width recessed handle. Clearance under drawers is 16"H. Durable gray powder coat finish.



Model  
WWC-3672-2HD

| Top<br>D x W          | Cabinet<br>Inside W x D | Cabinet<br>Only | Wt. | Cabinet with<br>1 Drawer, Centered | Wt. |
|-----------------------|-------------------------|-----------------|-----|------------------------------------|-----|
| 30 x 48               | 43 x 25                 | WWC-3048        | 318 | WWC-3048-HD                        | 357 |
| 30 x 60               | 55 x 25                 | WWC-3060        | 371 | WWC-3060-HD                        | 410 |
| 30 x 72               | 67 x 25                 | WWC-3072        | 430 | WWC-3072-HD                        | 469 |
| 36 x 72               | 67 x 31                 | WWC-3672        | 476 | WWC-3672-HD                        | 515 |
| <b>with 2 Drawers</b> |                         |                 |     |                                    |     |
| 30 x 72               | 67 x 25                 | -               | -   | WWC-3072-2HD                       | 508 |
| 36 x 72               | 67 x 31                 | -               | -   | WWC-3672-2HD                       | 554 |



## Shop Desk

All-welded construction with comfortable height as a standing desk/workstation. Riser shelf is 10" deep and 10" above desk surface. Locking storage drawer is 13"W x 17"D x 4-1/2"H and comes with two keys. Lower shelves have 1-1/2" retaining lips and 11-3/4" shelf clearance. Durable powder coated finish.

**Stationary Models:** Leg levelers allow height adjustment of desk surface from 39" - 42" high. 2000 lbs. capacity.

**Mobile Models:** 3" swivel brake casters with rubber wheels, 42" high desk surface. 1000 lbs. capacity.

| Overall D x W | Stationary Model No. | Wt. | Mobile Model No. | Wt. |
|---------------|----------------------|-----|------------------|-----|
| 22 x 24       | PSR-2224-LLDR        | 99  | PSR-2224-3RBKDR  | 104 |
| 24 x 36       | PSR-2436-LLDR        | 134 | PSR-2436-3RBKDR  | 139 |



Model  
PSR-2224-LLDR



Model  
PSR-2224-3RBKDR

## Enclosed Shop Desk

Enclosed cabinet with 13 gauge expanded metal provides visibility of the contents. All welded construction ensures items stay secure. All models include locking storage drawer. Riser shelf is 10" deep and 10" above writing surface.

**Stationary Models:** Leg levelers allow height adjustment of desk surface from 39" to 42" high.

**Mobile Models:** 3" swivel brake casters with rubber wheels, 42" high desk surface.

| Overall D x W | Stationary Model No. | Wt. | Mobile Model No. | Wt. |
|---------------|----------------------|-----|------------------|-----|
| 22 x 24       | PSX-2224-LLDR        | 136 | PSX-2224-3RBKDR  | 141 |
| 24 x 36       | PSX-2436-LLDR        | 171 | PSX-2436-3RBKDR  | 176 |



Model  
PSX-2224-3RBKDR



Model  
PSX-2224-LLDR

## Receiving Station

2000 lbs. Capacity

All-welded 12 gauge construction. Top surface measuring 24" deep x 36" wide, is enclosed on three sides with flush front edge to provide an open writing surface. The height can be set from 39-1/2" - 42-1/2" above the floor. The 3 shelf version has 13" of clearance between the three shelves and the 2 shelf station has 27" of clearance. Riser measures 10" deep and is 12" above the writing surface allowing storage of most 3 ring binders. Floor glides adjust to almost any uneven floor surface.

| Overall D x W |                      | Model No.   | Wt. |
|---------------|----------------------|-------------|-----|
| 24 x 36       | Without Center Shelf | RS-2436-LL  | 159 |
| 24 x 36       | With Center Shelf    | RS3-2436-LL | 192 |



Model  
RS3-2436-LL

## Receiving Station - with Locking Doors

2 locking doors feature a 3 point latching system and keyed locking handle to keep your items secure.

| Overall D x W |                      | Model No.      | Wt. |
|---------------|----------------------|----------------|-----|
| 24 x 36       | Without Center Shelf | RS-2D-2436-LL  | 182 |
| 24 x 36       | With Center Shelf    | RS3-2D-2436-LL | 215 |



Model  
RS-2D-2436-LL



**Model  
MT1-2436-30**

#### OPTIONS AVAILABLE

**Swivel casters with wheel brakes,**  
3" rubber wheels (9 lbs.),  
add: **-3R** to Model No.

*Note: Models with casters are same  
overall height as those without casters on  
Single Shelf Models. Capacity 500 lbs.*

**Accessory Drawer –**  
13"W x 15"D x 5"H (10 lbs.),  
add: **-ED** to Model No.



## Steel-Top Machine Tables

**2000 lbs. Capacity**

12 gauge smooth steel top won't warp or splinter. Legs and braces are 1-1/2" x 1-1/2" angle iron. All-welded units ship set up and ready for immediate use. Available in a variety of sizes and heights.

| Top<br>D x W | Height | Model       | Wt. |
|--------------|--------|-------------|-----|
| 18 x 24      | 18     | MT1-1824-18 | 31  |
|              | 24     | MT1-1824-24 | 33  |
|              | 30     | MT1-1824-30 | 35  |
|              | 36     | MT1-1824-36 | 37  |
|              | 42     | MT1-1824-42 | 44  |
| 24 x 36      | 18     | MT1-2436-18 | 48  |
|              | 24     | MT1-2436-24 | 50  |
|              | 30     | MT1-2436-30 | 52  |
|              | 36     | MT1-2436-36 | 55  |
| 24 x 48      | 42     | MT1-2436-42 | 58  |
|              | 18     | MT1-2448-18 | 75  |
|              | 24     | MT1-2448-24 | 78  |
|              | 30     | MT1-2448-30 | 82  |
|              | 36     | MT1-2448-36 | 86  |
|              | 42     | MT1-2448-42 | 89  |

## Multi-Shelf Machine Tables

**2000 lbs. Capacity**

All-welded units have 12 gauge shelves. Top shelf has flush edges, and reinforcement on larger sizes. Lower shelves have 1-1/2" retaining lip to contain small parts. Angle iron legs are 3/16" thick with 2-1/2" footpads.

| Size<br>D x W x H | 2 Shelves<br>22" clearance | Wt. | 3 Shelves<br>10-1/4" clearance | Wt. |
|-------------------|----------------------------|-----|--------------------------------|-----|
| 18 x 24 x 32-1/2  | MT1824-2                   | 53  | MT1824-3                       | 70  |
| 18 x 32 x 32-1/2  | MT1832-2                   | 60  | MT1832-3                       | 81  |
| 24 x 36 x 32-1/2  | MT2436-2                   | 80  | MT2436-3                       | 111 |
| 24 x 48 x 32-1/2  | MT2448-2                   | 100 | MT2448-3                       | 140 |
| 24 x 60 x 32-1/2  | MT2460-2                   | 131 | MT2460-3                       | 183 |
| 30 x 48 x 32-1/2  | MT3048-2                   | 130 | MT3048-3                       | 180 |

Accessory Drawer - 13"W x 15"D x 5"H, add **-ED** to Model No.



**Model  
MT2436-2**

#### OPTIONS AVAILABLE

**Swivel casters with  
wheel brakes,**  
3" rubber wheels (9 lbs.),  
add: **-3R** to Model No.  
(Add 4" to overall height  
on Multi-Shelf models.)  
**500 lbs. Capacity**



**Model  
MT1824-2-3R**

**Adjustable Height  
Leg Levelers –** Adjusts  
standard table height  
from +1" to +4",  
add **-LL** to Model No.  
**2000 lbs. Capacity**



**Model  
MT2436-3-LL**





## Heavy-Duty Machine Tables

**10,000 lbs. Capacity**

Top is formed from 3/16" thick steel for the heaviest applications, and reinforced with 2" x 2" x 3/16" angle iron. Legs are 2" x 2" x 1/4" angle and have 2-1/2" foot-pads with 5/8" diameter lag holes. All-welded construction, gray powder coated finish.

| Top<br>D x W | Height | Model No.    | Wt. |
|--------------|--------|--------------|-----|
| 16 x 30      | 24     | MTH1-1630-24 | 96  |
|              | 30     | MTH1-1630-30 | 103 |
|              | 36     | MTH1-1630-36 | 109 |
| 22 x 30      | 24     | MTH1-2230-24 | 102 |
|              | 30     | MTH1-2230-30 | 108 |
|              | 36     | MTH1-2230-36 | 114 |
| 28 x 30      | 24     | MTH1-2830-24 | 116 |
|              | 30     | MTH1-2830-30 | 122 |
|              | 36     | MTH1-2830-36 | 128 |
| 30 x 36      | 24     | MTH1-3036-24 | 134 |
|              | 30     | MTH1-3036-30 | 140 |
|              | 36     | MTH1-3036-36 | 147 |
| 30 x 48      | 24     | MTH1-3048-24 | 164 |
|              | 30     | MTH1-3048-30 | 170 |
|              | 36     | MTH1-3048-36 | 179 |
| 30 x 60      | 24     | MTH1-3060-24 | 191 |
|              | 30     | MTH1-3060-30 | 197 |
|              | 36     | MTH1-3060-36 | 203 |



**Model  
MTH1-2830-30**

## Adjustable Height Heavy-Duty Machine Table


**10,000 lbs. Capacity**

7 gauge steel top and heavy 2" x 2" leg construction are used to make a Heavy-Duty Machine Table that will meet the most demanding application. Adjustable legs allow table height positioning from 30" to 37" high with 1" increments. Durable gray powder coated finish.

| Size    | Model No.    | Wt. |
|---------|--------------|-----|
| 16 x 30 | MTH1-1630-AH | 115 |
| 22 x 30 | MTH1-2230-AH | 124 |
| 28 x 30 | MTH1-2830-AH | 141 |
| 30 x 36 | MTH1-3036-AH | 159 |
| 30 x 48 | MTH1-3048-AH | 188 |
| 30 x 60 | MTH1-3060-AH | 212 |



**Model  
MTH1-2830-AH**



## Adjustable Spring Safety Gate

Adjustable width 22-1/2" to 36". Set screws secure at desired width. Stainless steel torsion spring closes the gate automatically. Spring is tension adjustable, and reversible. Meets OSHA 1910.23a requirements. Powder coated red finish (except spring). Outside tubing 1.37" OD x 12 gauge wall. Mounting channel is 2" x 1" with two mounting holes (hardware not included).

| Overall W x D x H | Model No. | Wt. |
|-------------------|-----------|-----|
| 24 x 3 x 24       | ◆ SGS-R   | 18  |



## ADJUSTABLE SPRING SAFETY GATE WITH EASY MOUNT KIT

Includes easy mount kit to mount directly on your existing hand rail. Two bolt together clamps hold unit securely to hand rail. No drilling required.

| Overall W x D x H | Model No.  | Wt. |
|-------------------|------------|-----|
| 24 x 3 x 24       | ◆ SGS-R-EM | 20  |



## Hydraulic Arm Safety Gate

Adjustable width 15" to 31". Set screw used to secure at desired width. Gate arm uses hydraulic pressure to smoothly close without slamming. Closing tension is adjustable. Mounting plate is 1-3/8" x 6" with two mounting holes (hardware not included). Mount to the left only. Durable powder coat red finish. Meets OSHA 1910.23a requirements.

| Overall W x D x H | Model No. | Wt. |
|-------------------|-----------|-----|
| 21 x 3-1/2 x 6    | ◆ SGH-R   | 10  |



## Barrier Railings

Available in 4', 5', and 6' Lengths

Use these in plant modular railing systems to mark aisle ways and guard equipment. Each section is made from 1.3" diameter steel tube with all-welded construction. All rails are 42" high. Powder coated in safety yellow. Order mounting posts MP-1 or MP-2 as needed to build your unique railing.

**Model  
MP-1**



**Model  
MP-2**

| Length             | Model No. | Wt. |
|--------------------|-----------|-----|
| 48"                | GR-48     | 21  |
| 60"                | GR-60     | 24  |
| 72"                | GR-72     | 26  |
| <b>1 Hole Base</b> | MP-1      | 2   |
| <b>2 Hole Base</b> | MP-2      | 4   |



## Safety Post Barricade

with 10' of Chain

All-welded steel barricade posts for use in your plant to temporarily mark work zones. Each barricade post is 42" high with an open ring to connect control chains. Durable safety yellow powder coated for high visibility.

|                               | Model No. | Wt. |
|-------------------------------|-----------|-----|
| <b>Barricade Post</b>         | SPB       | 18  |
| <b>10' Chain with 2 snaps</b> | SPB-C120  | 3   |



## Wheel Selection Guide

### Polyurethane Wheels

**Load Capacity Range:**  
300 – 1,000 lbs.



**Characteristics:** Easier rolling for higher capacities, long lasting, chemical resistant, non-marking and quiet operation.

High strength polyurethane tread liquid cast and mechanically locked to a polymer or cast metal core. A polyurethane tread is superior for industrial, warehouse and institutional applications with a great combination of easy rolling and maneuverability under heavy load capacity while able to quietly roll over rough floor surfaces.

### Phenolic Wheels

**Load Capacity Range:**  
900 – 1,250 lbs.



**Characteristics:** Best rolling for heavy load capacities, long lasting, chemical resistant, high temperature, non-marking for smooth floor surface.

A solid one piece wheel that is high pressure molded with reinforced fiber-filled phenolic resin. A cost effective wheel best used for high capacity industrial and warehouse applications. Hard tread wheel offers the least rolling resistance on smooth floors, but does not absorb vibration over rough surfaces.

### Mold-On Rubber Wheels

**Load Capacity Range:**  
500 – 600 lbs.



**Characteristics:** Better load capacity, long lasting, cushion tread, absorbs shock and vibration, floor protection and quiet operation.

Rubber tread vulcanized to metal core. A good combination of load capacity and cushion tread that easily and quietly rolls over rough floors. A great wheel choice for heavy industrial and warehouse applications.

### Solid Rubber Wheels

**Load Capacity Range:**  
300 – 400 lbs.



**Characteristics:** Good load capacity, great for rough floor surfaces, puncture-proof, floor protection and quiet operation.

Cushioned rubber tire over plastic hub that is more stable and easier to roll under heavy loads than pneumatic wheels. Sometimes referred to as a semi-pneumatic tire, these wheels are a rugged, maintenance-free (no air pressure to fill and maintain) and are an alternative to pneumatic wheels.

### Pneumatic Wheels

**Load Capacity Range:**  
300 – 400 lbs.



**Characteristics:** Great cushion ride over rough floor surfaces, best option for traveling over small obstructions or outdoor applications. Best shock and vibration absorption.

Like an automotive tire, an air filled rubber tire on a metal hub is able to easily roll over uneven surfaces and bumps but does require air pressure management. Under heavy loads, the pneumatic tire profile will compress creating greater rolling resistance. Pneumatic wheels are ideal for handling fragile loads over rough surfaces.

### Flat Free Hand Truck Wheels

**Load Capacity Range:**  
300 lbs.



**Characteristics:** All of the benefits of a pneumatic wheel without losing air or going flat. This non-marking tire is composed of a dense microcellular polyurethane foam that performs like a pneumatic tire, cushioning the load and rolling over rough surfaces more easily. Upgraded precision ball bearing improves rollability and extends life.

## Wheel Specifications

| Wheel Dia. | Tread Width | Wheel Type                                     | Bearing I.D.                            | Centered Hub Model No.              | Bearing I.D.             | Offset Hub Model No. |
|------------|-------------|--|---|-------------------------------------|--------------------------|----------------------|
| 5          | 1-1/4       | Polyurethane                                   | 3/8" Ball                               | WHMP-05114                          |                          |                      |
| 6          | 2           | Mold-On Rubber<br>Polyurethane<br>Phenolic     | 3/4" Roller<br>1/2" Ball<br>3/4" Roller | WHMS-0620<br>WHMP-0620<br>WHPL-0620 |                          |                      |
| 8          | 2           | Mold-On Rubber<br>Polyurethane<br>Phenolic     | 3/4" Roller<br>1/2" Ball<br>3/4" Roller | WHMS-0820<br>WHMP-0820<br>WHPL-0820 |                          |                      |
| 8          | 2-1/2       | Solid Rubber                                   | –                                       | NA                                  | 5/8" Ball                | WHSP-0825-0          |
| 9          | 3           | Pneumatic 2.80/2.50-4                          | 5/8" Ball                               | WHPN-0830                           |                          |                      |
| 10         | 2-3/4       | Solid Rubber                                   | 5/8" Ball                               | WHSP-1027P-C                        | 5/8" Ball                | WHSP-1027-P          |
| 10         | 3-1/2       | Pneumatic 4.10/3.50-4                          | 5/8" Ball                               | WHPN-1035-C                         | 5/8" Ball                | WHPN-1035            |
| 10         | 3-1/2       | Flat Free 4.10/3.50-4<br>Microcellular Foam    | 5/8" Ball<br>(Precision)                |                                     | 5/8" Ball<br>(Precision) | WHFF-1035            |
| 12         | 2-1/2       | Mold-On Rubber                                 | 1" Roller                               | WHMS-12250                          |                          |                      |
| 12         | 3-1/2       | Pneumatic 4.10/3.50-6<br>Pneumatic 4.10/3.50-6 | 5/8" Ball<br>1" Roller                  | WHPN-1235<br>WHPN-1235-RB           |                          |                      |
| 16         | 4           | Pneumatic 4.80/4.00-8                          | 1" Roller                               | WHPN-1640                           |                          |                      |





Little Giant Products  
Manufactured by  
Brennan Equipment & Mfg. Inc.  
730 Central Ave., University Park, IL 60484  
Phone (708) 534-5500 • Fax (708) 534-5520  
www.LittleGiant-USA.com • sales@littlegiant-usa.com

**SOLD ONLY THROUGH DEALERS**  
Contact your local Industrial Distributor,  
or visit our website to locate a  
Distributor in your area.

